



# REFRIGERATOR

BOTTOM MOUNT FREEZER

BASIC : RF261B\*/RF260B\*

MODEL NAME : RF261BEAESR	RF261BEAEBC
RF261BEAESP	RF261BEAEWW
RF260BEAESR	RF260BEAEBC
RF260BEAESP	RF260BEAEWW
RF260BEAESL	
MODEL CODE : RF261BEAESR/AA	RF261BEAEBC/AA
RF261BEAESP/AA	RF261BEAEWW/AA
RF260BEAESR/AA	RF260BEAEBC/AA
RF260BEAESP/AA	RF260BEAEWW/AA
RF260BEAESL/TA	

# SERVICE *Manual*

## REFRIGERATOR



RF261B\*/RF260B\*

## CONTENTS

1. PRECAUTIONS (SAFETY WARNINGS).....	4
2. PRODUCT SPECIFICATIONS.....	8
3. DISASSEMBLY AND REASSEMBLY .....	24
4. TROUBLESHOOTING .....	46
5. PCB DIAGRAM .....	82
6. WIRING DIAGRAM .....	87
7. SCHEMATIC DIAGRAM .....	88



## **WARNING**

### **IMPORTANT SAFETY NOTICE**

The service guide is for service men with adequate backgrounds of electrical, electronic, and mechanical experience.

Any attempt to repair a major appliance may result in personal injury and property damage.

The manufacturer or dealer cannot be responsible for the interpretation of this information.

**SAMSUNG ELECTRONICS AMERICA, INC.**

**Technical Service Guide**

**Copyright** ©2012

All rights reserved. This service guide may not be reproduced in whole or in part in any form without written permission from the SAMSUNG ELECTRONICS Company.

# Contents

<b>1. Precautions (safety warnings).....</b>	<b>4</b>
<b>2. Product specifications.....</b>	<b>8</b>
2-1) Introduction of Main Function.....	9
2-2) Specifications.....	11
2-3) Interior Views .....	12
2-4) Model Specification &Specification Chart.....	13
2-5) Dimensions of Refrigerator (Inches).....	16
2-6) Optional Material Specification.....	17
2-7) Refrigerant Route in Refrigeration cycle.....	18
2-7-1. Principle of freezear .....	19
2-7-2. Operation theory of refrigeration cycle components .....	20
2-7-3. Refrigeration Cycle Type .....	23
2-8) Cooling Air Circulation.....	24
<b>3. Disassembly and Reassembly .....</b>	<b>25</b>
3-1) PRECAUTION.....	26
3-2) Refrigerator Door .....	27
3-3) Door Handle Refrigerator.....	29
3-4) Door Handle Freezer.....	29
3-5) Refrigerator Light.....	30
3-6) Cover-Display & Water-Dispenser.....	30
3-7) Water-Dispenser.....	31
3-8) Glass Shelf.....	32
3-9) Foldable Glass Shelf.....	32
3-10) Vegetable & Fruit Drawers Shelf .....	33
3-11) Case Water Filter .....	34
3-12) Cool Select Pantry.....	35
3-13) Motor Damper .....	35
3-14) Water Filter (Assembly & Disassembly).....	36
3-15) Gallon Door Bin .....	37
3-16) Vertical Hinged Section .....	37
3-17) Evaporator Cover In Refrigerator.....	38
3-18) Evaporator In Refrigerator .....	39
3-19) Freezer Door.....	40
3-20) Ice-Maker .....	41
3-21) Auger Motor Fan .....	43
3-22) Freezer Light .....	44
3-23) Door Switch In Freezer .....	44
3-24) Evaporator Cover In Freezer.....	45
3-25) Evaporator In Freezer .....	45
3-26) Machine Compartment .....	46
3-27) COMPRESSOR .....	48
3-28) Electric Box .....	49

# Contents

<b>4. Troubleshooting .....</b>	<b>50</b>
4-1) Function for failure diagnosis.....	51
4-1-1. Test mode (manual operation / manual defrost function).....	51
4-1-2. Display function of Communication error.....	52
4-1-3. Self-diagnostic function .....	53
4-1-4. Display function of Load condition.....	56
4-1-5. Exhibition mode setting function.....	57
4-1-6. Option setting function.....	58
4-1-7. Option TABLE .....	60
4-2) Diagnostic method according to the trouble symptom(Flow Chart).....	62
4-2-1. If the trouble is detected by self-diagnosis .....	64
4-2-2. If FAN does not operate .....	75
4-2-3. If ICE Room Fan does not operate.....	76
4-2-4. When ICE MAKER(FF) does not operate .....	77
4-2-5. When ICE MAKER(FZ) does not operate .....	78
4-2-6. If defrost does not operate (F,R DEF Heater).....	79
4-2-7. When Power is not applied .....	80
4-2-8. When Compressor does not run (Inverter COMP.) .....	81
4-2-9. When alarm sounds continuously without stop(related with buzzer sound).....	82
4-2-10. When the Panel PCB does not operate normally .....	84
4-2-11. If Pantry Panel PCB is not working normally .....	85
4-2-12. When refrigerator ROOM Lamp does not light up.....	86
4-2-13. If ICE Water is not supplied.....	87
4-2-14. If Cubed or Crushed Ice is not supplied.....	89
4-2-15. If Cover Ice Route Motor(Geared Motor) is not working normally .....	90
4-2-16. IR Sensor Trouble-Shooting.....	91
4-2-17. LED blinking frequency depending on protecting functions.....	92
SPM FREEWHEELING DIODE VOLTAGE VALUE.....	93
<b>5. Pcb Diagram .....</b>	<b>94</b>
5-1) PCB Layout with part position .....	95
5-2) PCB Layout with part position (Inverter Board).....	96
5-3) Connector Layout with part position (Main Board) .....	97
5-4) Connector Layout with part position (Inverter Board).....	98
<b>6. Wiring Diagram .....</b>	<b>99</b>
6-1) Model : RF260B* , RF261B* .....	99
<b>7. Schematic Diagram .....</b>	<b>100</b>
7-1) Whole block diagram .....	100
7-2) Whole block diagram.....	101
7-3) CIRCUIT DIAGRAM.....	102
7-3-1. Main .....	102
7-3-2. INVERTER.....	103

## 1. PRECAUTIONS (SAFETY WARNINGS)

- Unplug the appliance before replacing or repairing electrical parts.
  - …> Be careful to avoid electric shock.
- Always use only the correct replacement parts.
  - …> Check the model, rated voltage, rated current and running temperature rating.
- When troubleshooting, verify that wiring harnesses are connected securely.
  - …> Make sure the connectors are not separated when power is supplied.
- Check for visible traces of water on electrical parts.
  - …> Replace or secure any part that may have come in contact with water.
- Check the status of parts after replacement or troubleshooting.
  - …> All parts must be reinstalled properly.
- Check the location where the refrigerator will be used.
  - …> If the refrigerator will be used in a damp or wet space, or if installation will be unstable, the unit should be relocated.
- The refrigerator must be grounded properly.
  - …> An earth ground should be used if there is a risk of high humidity or wetness.
- The refrigerator should be plugged into a dedicated outlet.  
Make sure the power cord is not damaged, crushed, squeezed or burned.
- If the plug is damaged it should be replaced.  
If the socket is damaged, it should not be used.
- Consumers must not try to repair the refrigerator.
- Nothing should be stored in the refrigerator except food.
  - …> Drugs requiring precise temperatures should not be stored in the refrigerator.
  - …> Flammable substances (alcohol, benzene, ether, LP gas, etc.) carry risk of explosion and should not be stored in the refrigerator.

## PRECAUTIONS (SAFETY WARNINGS)

**Read all instructions before repairing the product and follow the instructions in order to prevent danger or property damage.**  
**Plug out and remove all the items in refrigerator prior to repair.**

### CAUTION/WARNING SYMBOLS DISPLAYED

	<b>Warning</b>	Indicates that a danger of death or serious injury exists.
	<b>Caution</b>	Indicates that a risk of personal injury or material damage exists.

### SYMBOLS

	means "Prohibited".
	means "Do not disassemble".
	means "No contact".
	means "Warning or Caution".
	means "Unplug the unit before performing service"
	means "Earth or Ground".



## Warning & Caution


**Unplug to exchange the interior lamp.**

- It may cause electric shock.



**Use the rated components on the replacement.**

- Check the correct model, rated voltage, rated current, operating temperature and so on.

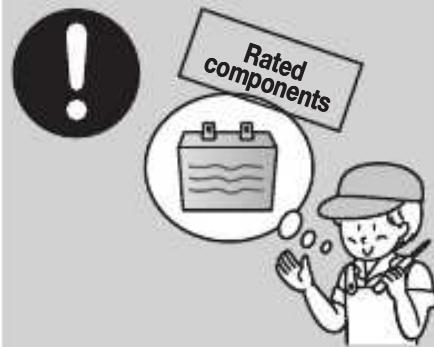

**On repair, make sure that the all wiring harnesses are reconnected.**

- Wiring harnesses should be connected tightly and kept dry.
- Bundle tightly wires in order not to be detached by the external force and then not to be wetted.



**On repair, Make sure that all parts and wires are free of dust and debris.**

- Cleaning parts could help prevent fire or shorting.




**Check the status of parts after replacement or troubleshooting.**

- All parts must be reinstalled properly.



**Check for visible traces of water on electrical parts.**

- Replace or secure any part that may have come in contact with water.

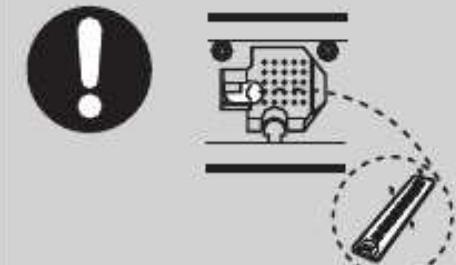

## PRECAUTIONS (SAFETY WARNINGS)

\* Please let users know following warnings & cautions in detail.



# Warning & Caution

**Customers should not store glass bottles of liquid in the freezer section.**

- *Frozen bottles could explode and cause injury.*



**Customers should not store narrow or long bottles or food in a small door shelf.**

- *These items could fall when the door is opened, causing injury to the customer.*



**Drugs requiring precise temperatures should not be stored in the refrigerator.**



**The refrigerator should be plugged into a dedicated outlet.**

- *Multiple plugs in the outlet could cause excessive heat or fire.*



**Consumers must not try to repair the refrigerator.**

- *Electrical and mechanical parts could injure the consumer.*



**Make sure the power cord is not damaged or crushed.**

- *A damaged cord could cause excessive heat or fire.*



**Customers should not store articles on the product.**

- *Opening or closing the door may cause things to fall down, which may cause injury.*




**Check the location where the refrigerator will be used.**

- *If the refrigerator will be used in a damp or wet space, or if installation will be unstable, the unit should be relocated.*



**The refrigerator must be grounded properly.**


- *An earth ground should be used if there is a risk of high humidity or wetness.*

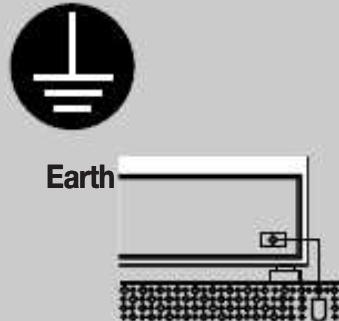

## PRECAUTIONS (SAFETY WARNINGS)


### FLOORING

For proper installation, this refrigerator must be placed on a level surface of hard material that is the same height as the rest of the flooring. This surface should be strong enough to support a fully loaded refrigerator, or approximately 660lbs(299kg).

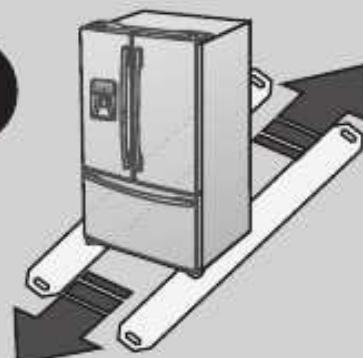

### MOVING

Protect the finish of the flooring. Cut a large section of the cardboard carton and place under the refrigerator where you are working. When moving, be sure to pull the unit straight out and push back in straight.

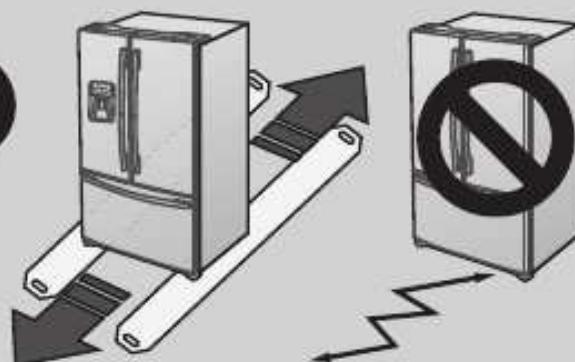

## 2. PRODUCT SPECIFICATIONS

2-1) Introduction of Main Function.....	9
2-2) Specifications.....	11
2-3) Interior Views .....	12
2-4) Model Specification &Specification Chart.....	13
2-5) Dimensions of Refrigerator (Inches).....	16
2-6) Optional Material Specification.....	17
2-7) Refrigerant Route in Refrigeration cycle.....	18
2-7-1. Principle of freezeer .....	19
2-7-2. Operation theory of refrigeration cycle components .....	20
2-7-3. Refrigeration Cycle Type .....	23
2-8) Cooling Air Circulation.....	24

## PRODUCT SPECIFICATIONS

### 2-1) Introduction of Main Function

- A newly developed SAMSUNG bottom mount freezer in 2012 has the following characteristics.

	<b>Surround Multi Flow</b> <ul style="list-style-type: none"><li>• Provides uniform cooling for each shelf and every corner in the fresh food section. This is accomplished by using a center positioned fan and duct with multiple cooling flow openings.</li></ul>
	<b>Twin Cooling System</b> <ul style="list-style-type: none"><li>• The refrigerator and the freezer each have an evaporator. Given this independent system, the freezer and the refrigerator are cooled individually as required and are, therefore, more efficient. Food odor from the refrigerator does not affect food in the freezer due to separate air flow circulation.</li></ul>
	<b>Electronic control from outside of Pantry Cover</b> <ul style="list-style-type: none"><li>• Adjustable temperature control (around 41°F(5°C) : Deli / around 38°F(3°C) : Fresh / around 34°F(1°C) Chilled ) Temperature control from outside of the Pantry : user friendly design helps keep foods fresh for longer</li></ul>
	<b>Easy Handle System</b> <ul style="list-style-type: none"><li>• Ez-open Freezer Door</li><li>• Ergonomic Door Design</li></ul>
	<b>One Touch Water Dispenser (Internal)</b> <ul style="list-style-type: none"><li>• One Hand Water Dispenser (RF261B*)</li></ul>
	<b>Secure Auto Close Door System</b> <ul style="list-style-type: none"><li>• Doors close tightly.</li><li>• Food on the doors stays cool.</li><li>• Prevents moisture from forming on the outside of the doors.</li></ul>
	<b>Slim Water Filtration System</b> <ul style="list-style-type: none"><li>• Slim water filter is placed between crispers for changing filter conveniently without removing items from Refrigerator.</li></ul>

## PRODUCT SPECIFICATIONS


### 2-2) Specifications

#### ELECTRICAL SPECIFICATIONS

Defrost Control	From 12 to 30hrs(comp. run time)
Thermo Bimetal Protector	140°F(60°C)(off) 104°F(40°C)(on)
Defrost Thermistor(502AT)	50°F(10°C)(off)
Electrical Rating	AC115V 60Hz 11.6 Amps
Maximum Current Leakage	0.25 mA
Maximum Ground Path Resistance	0.1 Ohm
Energy Consumption	481 kWh/year



#### NO LOAD PERFORMANCE

Refrigerator, °F	44°F(7°C) ~ 34°F(1°C)
Freezer, °F	5°F(-15°C) ~ -8°F(-23°C)
Run Time, %	< 40 < 80

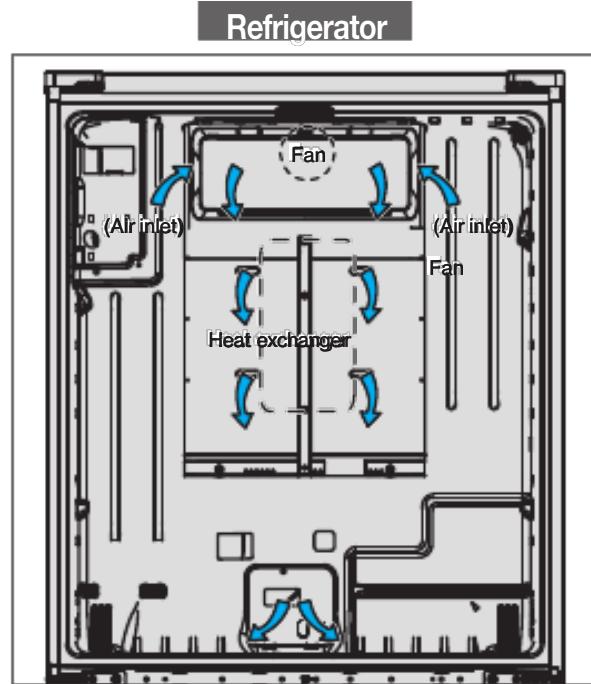

#### REFRIGERATION SYSTEM

Refrigerant Charge (R134a)	5.64 oz(160g)
Compressor(MKV190C-L2J)	1314 Btu/hr(0.385kw)
Compressor oil	Freol 5 ~ 15c
R Capillary tube(Dia, Length)	0.032", 118" (0.82mm, 3500mm)

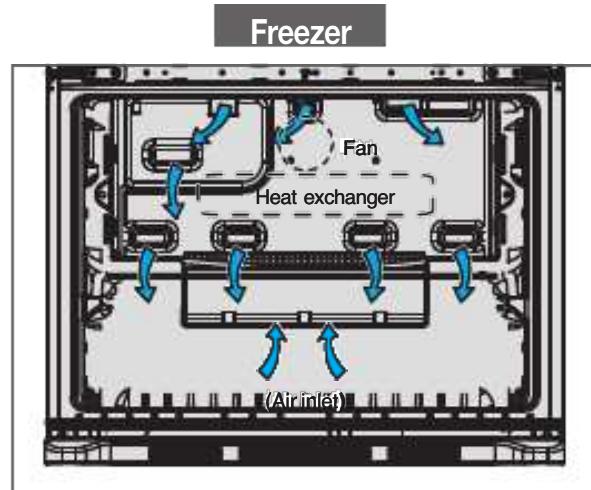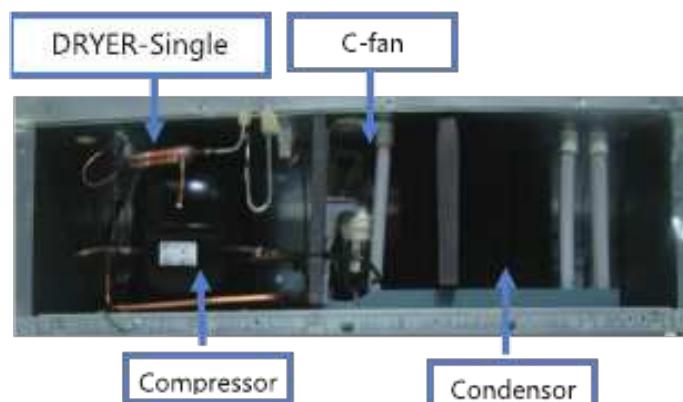


#### INSTALLATION

Clearance must be provided for air circulation.	
AT TOP	1" (25mm)
AT SIDES	1" (25mm)
AT REAR	2" (50mm)

## PRODUCT SPECIFICATIONS

### 2-3) Interior Views

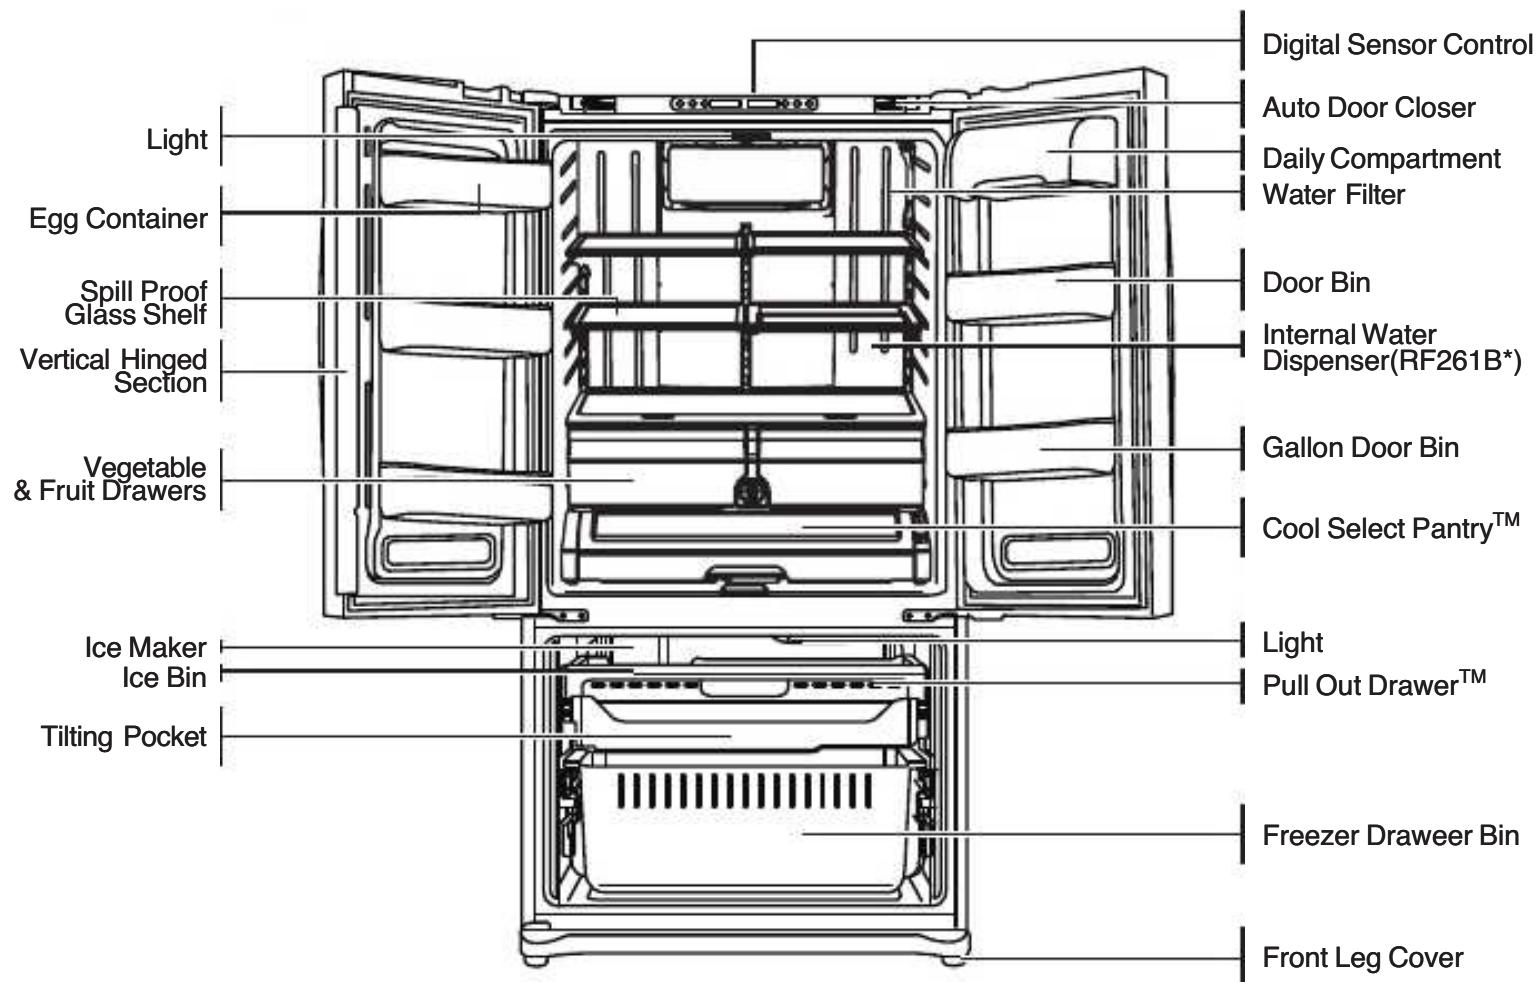

## PRODUCT SPECIFICATIONS

### 2-4) Model Specification & Specification Chart

ITEM	SPEC	SAMSUNG	MAYTAG	LG		
		RF261B* /RF260B*	MFI2568AES	LFX25960ST		
Appearance						
Product Zone	Cooling Tech	Twin Cooling	Mono Cooling	Mono Cooling		
	Door Shape	Contour	Contour	Contour		
	Special Room	Cool Select Pantry	Pantry	Pantry		
Performance	Cooling Speed(Min)	F-Room	250 ↓	175.4	246	224
		R-Room	250 ↓	172.8	575	232
	89.6 (32°C)	F-Room	-26.0 ↓	-32.0	-27.2	-28.8
		R-Room	2.0 ↓	-1.2	1.6	-1.8
	109.4 (43°C)	F-Room	-18.0 ↓	-24.8	-20.9	-22.5
		R-Room	5.0 ↓	-2.5	5.9	0.8
	Temperature Distribution (Fridge)	F-Room	2.0 ↓	0.3	0.6	1.3
		R-Room	2.0 ↓	0.5	1.1	0.5
	Operation rate	N-N	60% ↓	47.4	60.7	56.5
	Sound power level		46dB ↓	41.8	47.0	41.7
	Sound Pressure level		45dB ↓	41.2	48.2	40.1

## PRODUCT SPECIFICATIONS

ITEM	Model	RF261B*	RF260B*
		Internal W/D with Pantry	Pantry
ITEM	IMAGE		
External size	W	35 6/8 Inch(908mm)	35 6/8 Inch(908mm)
	D	On Cabinet	29 1/4 Inch (745mm)
	D	W/O Handle	33 2/8 Inch (842mm)
	D	With Handle	35 3/4 Inch (907mm)
	H	W/O Hinge Cap	68 5/8 Inch (1744mm)
	H	With Hinge Cap	70 Inch (1778mm)
Net Capacity	Total	25.5(725.0 ℥)	25.5(725.0 ℥)
	Freezer	7.9(222.6 ℥)	7.9(222.6 ℥)
	Refrigerator	17.6(499.4 ℥)	17.6(499.4 ℥)
Efficiency of Volume		53.35%	53.35%
Weight	Set	140kg	131.5kg(289.9lbs)
	Packing	144.0kg(317.5lbs)	143.5kg(316.3lbs)
Packing	Width	38 5/8 Inch (980mm)	38 5/8 Inch (980mm)
	Depth	36 2/8 Inch(920mm)	36 2/8 Inch(920mm)
	Height	75 6/8 Inch (1925mm)	75 6/8 Inch (1925mm)
Compressor		RECIPROcate	RECIPROcate
Rated Frequency and Frequency		AC 115V/60Hz	AC 115V/60Hz
Refrigerant		R134a	R134a
Foaming Agent		C-PENTANE	C-PENTANE
Refrigerant Input Amount		5.29 oz (160g)	5.29 oz (160g)
Type Refrigerator		INDIRECT COOLING METHOD REFRIGERATOR	INDIRECT COOLING METHOD REFRIGERATOR
Motor Rated Consumption Power		140W	140W
Electric Heater Rated Consumption Power		517.8W	517.8W

## PRODUCT SPECIFICATIONS


Items			Specification	
Model			RF260B*	RF261B*
Components for Freezer	Compressor	Model	MKV190CL2J	
		Starting type	R.S.C.R	
		Oil Charge	FREOL - 10	
	Evaporator	Freezer	SPLIT FIN TYPE	
		Refrigerator	SPLIT FIN TYPE	
	Condenser		Forced and natural convection type	
	Dryer		Molecular sieve XH-9	
Room Temperature Sensor Components	Capillary tube (Dia x Length)		0.032" x 118" (0.81mm x 2997mm)	
	Refrigerant			R134a
	Freezer	Model	Temperature Selection	ON (°F)                    OFF (°F)
			-8°F (-23°C)	-5°F (-21°C)            -11°F (-24°C)
			-0°F (-18°C)	3°F (-16°C)            -3°F (-19°C)
			5°F (-15°C)	8°F (-12°C)            2°F (-17°C)
	Refrigerator	Model	Temperature Selection	ON (°F)                    OFF (°F)
			34°F (1°C)	36°F (2°C)            32°F (0°C)
			37°F (3°C)	39°F (4°C)            35°F (2°C)
			44°F (7°C)	46°F (8°C)            42°F (6°C)
Defrost Related Components	Defrost Cycle	First Defrost Cycle (Concurrent defrost of F and R)		6hr ± 10min
		Defrost Cycle (FRE)		12~23hr(vary according to the conditions used)
		Defrost Cycle (REF)		6~11hr(vary according to the conditions used)
		Pause Time		12 ± 1min
	Defrost Sensor	F Defrost-Sensor	Model	THERMISTOR (502AT)
			SPEC	5.0 kΩ at 77°F (25°C)
		R Defrost-Sensor	Model	THERMISTOR (502AT)
			SPEC	5.0 kΩ at 77°F (25°C)
	Bimetal	F Bimetal-thermo Protector	Rated	AC 125V 10A / AC 250V 3A
			Operating temperature	Off : 140°F (60°C) / On : 104°F (40°C)
		R Bimetal-thermo Protector	Rated	AC 125V 10A / AC 250V 3A
			Operating temperature	Off : 140°F (60°C) / On : 104°F (40°C)

## PRODUCT SPECIFICATIONS

Items		Specification	
Model		RF260B*	RF261B*
Electric Components	Defrost Heater(FRE)	Heated at F Defrost	AC 115V, 240W / AC 230V, 240W
	Defrost Heater(REF)	Heated at R Defrost	AC 115V, 120W / AC 230V, 120W
	DISPENSER Heater	Interlock with French Heater	AC 115V, 10W / AC 230V, 3W
	FRENCH Heater	—	AC 115V, 10W / AC 230V, 10W
	Bimetal thermo For Preventing Overheating of Refrigerator Lamp		AC125V 10A / AC250V 3A Off: 140°F (60 ) / On : 104°F (40 )
	Condenser for COMP (Package type)	Running	12μF ,250V / 5μF ,450V
		Starting	—
	Starting-Relay	Model	J531Q33E100M200-2
		Operation	10Ω ± 20%
	Over Load Relay	Model	4TM435RFBYY-53
		Temp.ON	266 ± 41°F (130 ± 5°C)
		Temp.OFF	141.8 ± 48.2°F (61 ± 9°C)
	Rated Voltage		AC 115V/60Hz / 220~240V/50Hz
	MOTOR-BLDC(FRE)		DC12V / FDQT06SS3
	MOTOR-BLDC(REF)		DC12V / FDQT06SS3
	MOTOR-BLDC(Circuit)		DC12V / FDQT06SS2
	MOTOR-DAMPER(PANTRY)		DC12V / NSBY001TA1
	Lamp(FRE)		AC 120V 60W(1EA) / AC230V 40W(1EA)
	Lamp(REF)		AC 120V 60W(2EA) / AC 230V 60W(2EA)
	Door Switch	FRE	AC 125V 1.5A (1EA) / AC 250V 0.5A
		REF	DC200V 1.5A / MS-406-SS-01(2EA)
	Power cord		AC125V 15A / AC 250V 10A
	Earth Screw		BSBN (BRASS SCREW)

## PRODUCT SPECIFICATIONS

### 2-5) Dimensions of Refrigerator (Inches)

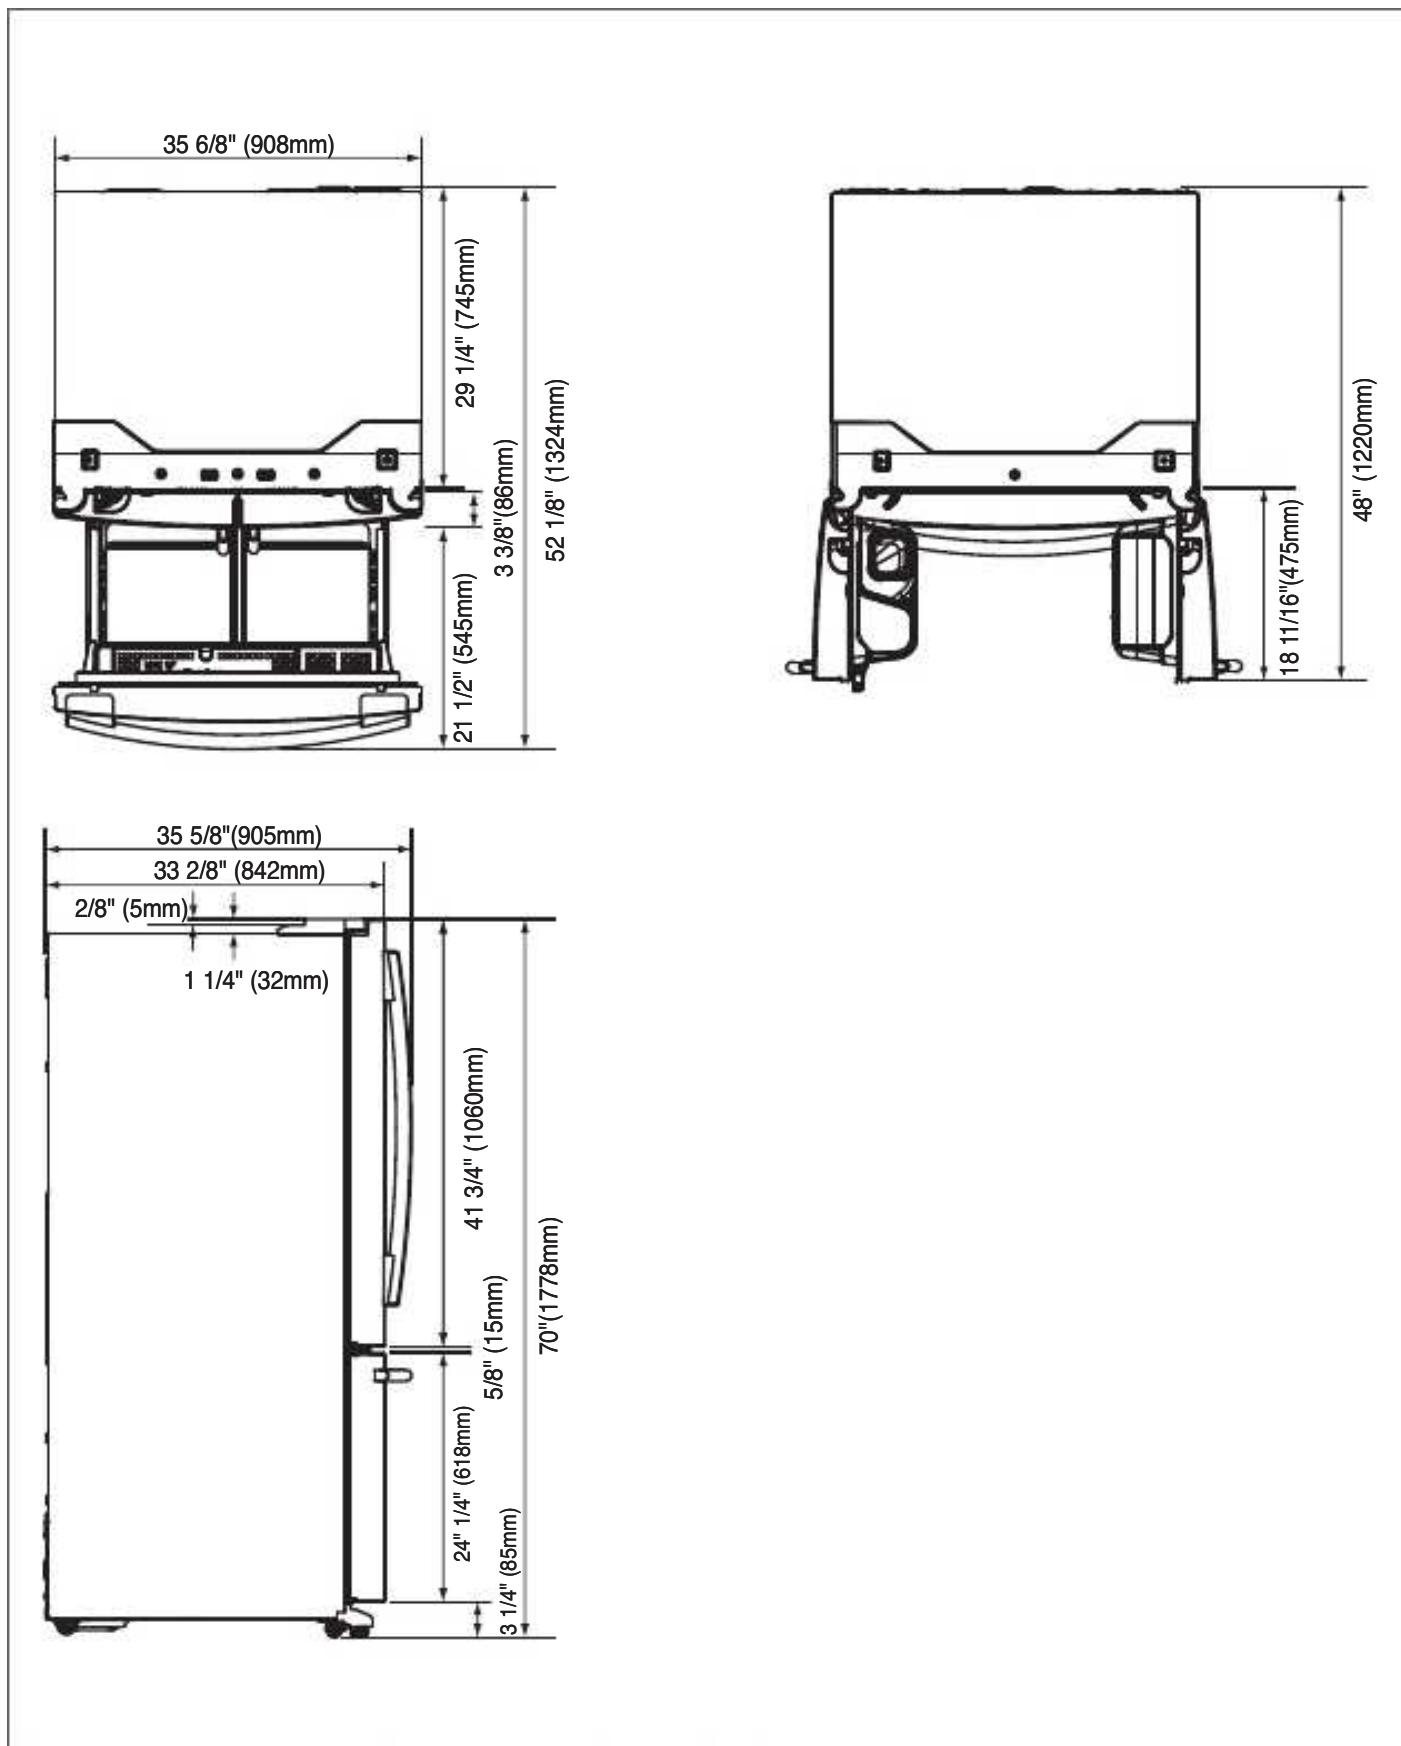

## PRODUCT SPECIFICATIONS


### 2-6) Optional Material Specification

	Part Name	Part Code	AMOUNT
	FILTER WATER-ASSY	DA29-00019A	1
	ASSY-PACKING SUB	DA99-03490L	1
	LED LAMP REF	DA41-00676G	4
	LED LAMP CASE-VEG R, L	DA41-00519S	1
	LED LAMP FRE	DA41-00676G	1

## PRODUCT SPECIFICATIONS



### 2-7) Refrigerant Route in Refrigeration cycle

Compressor → Conden → Hot Pipe → Dryer → Capillary Tube → Refrigerator Evaporator  
→ Freezer Evaporator → Suction Pipe → Compressor

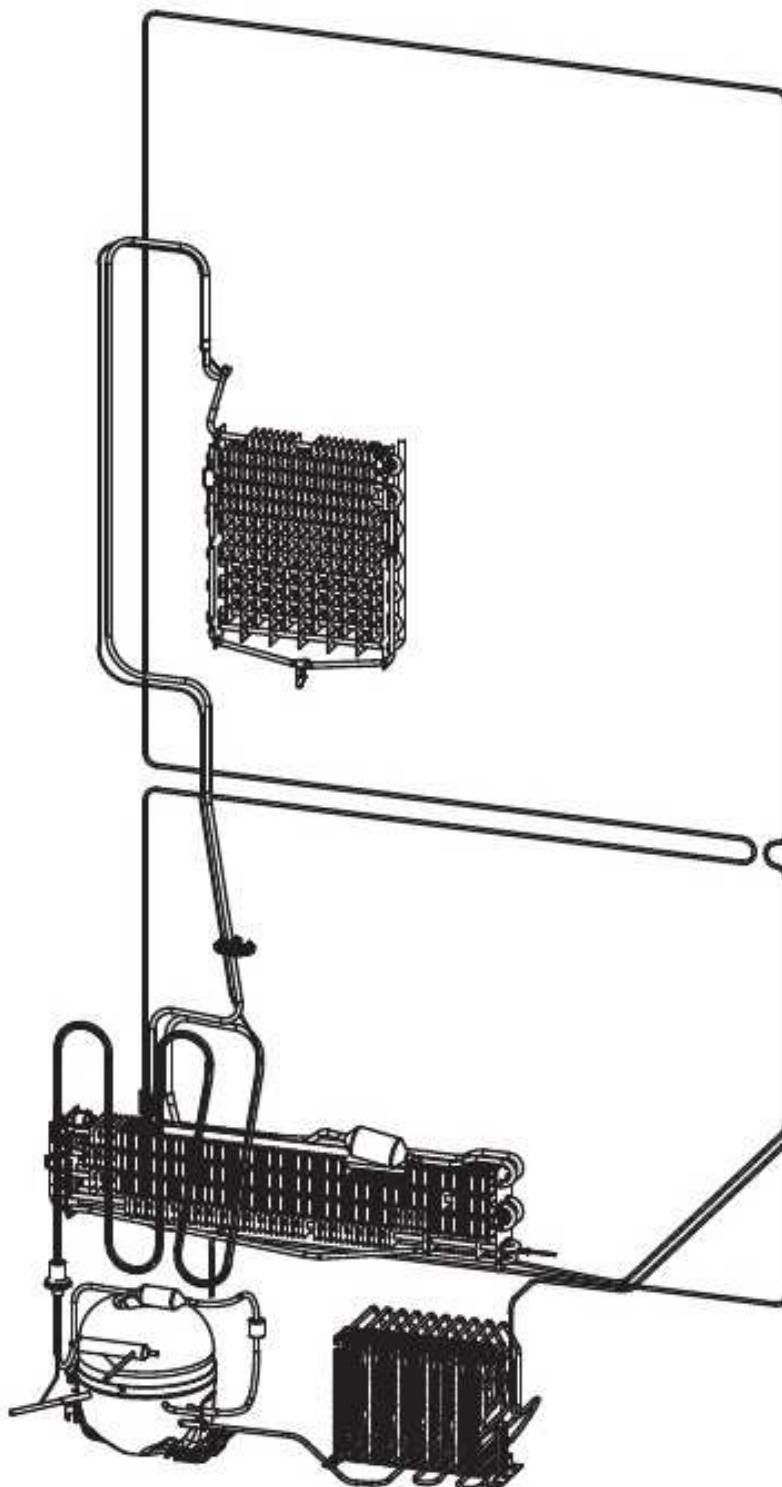

## PRODUCT SPECIFICATIONS

### 2-7-1. Principle of freezer

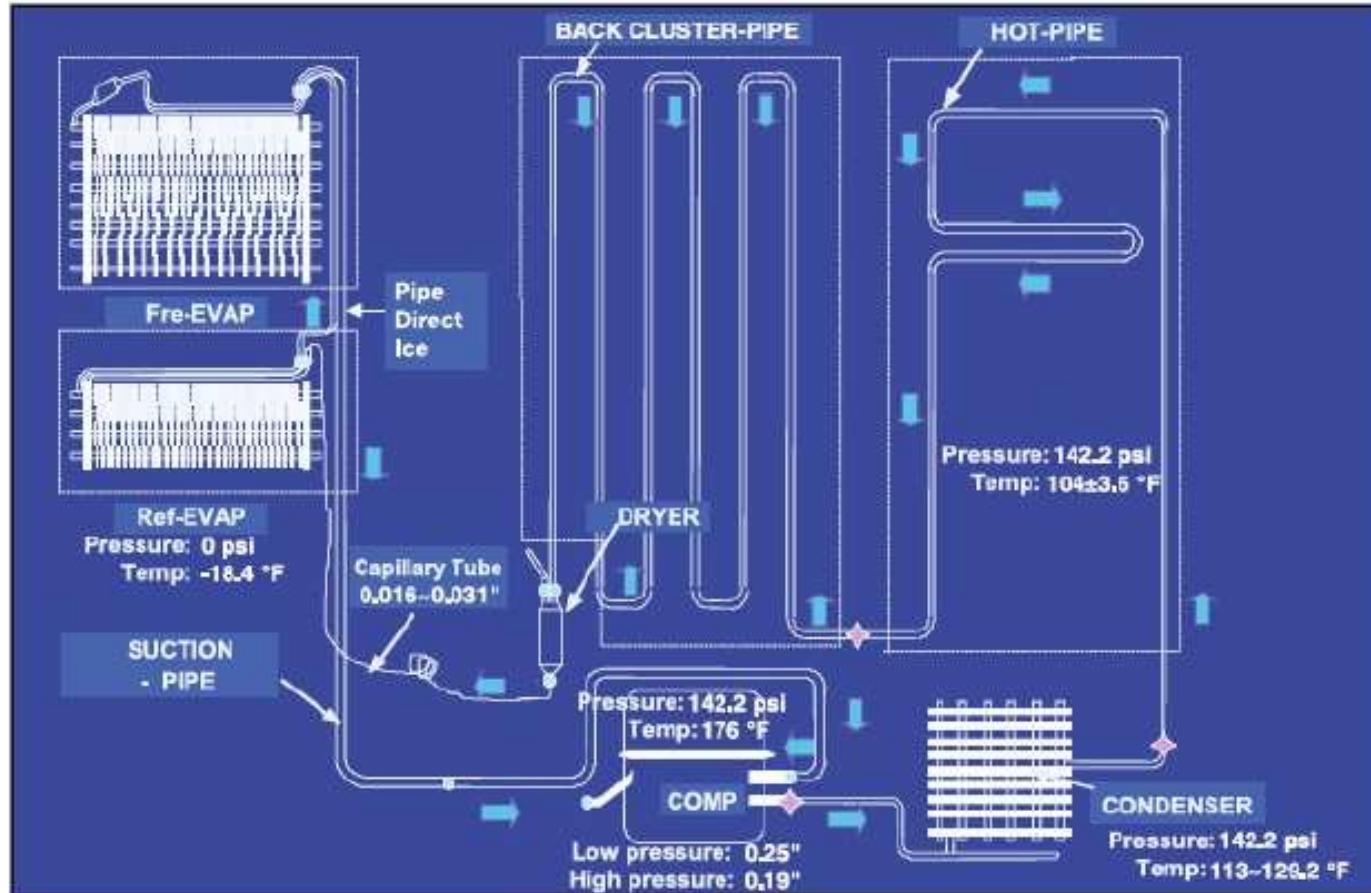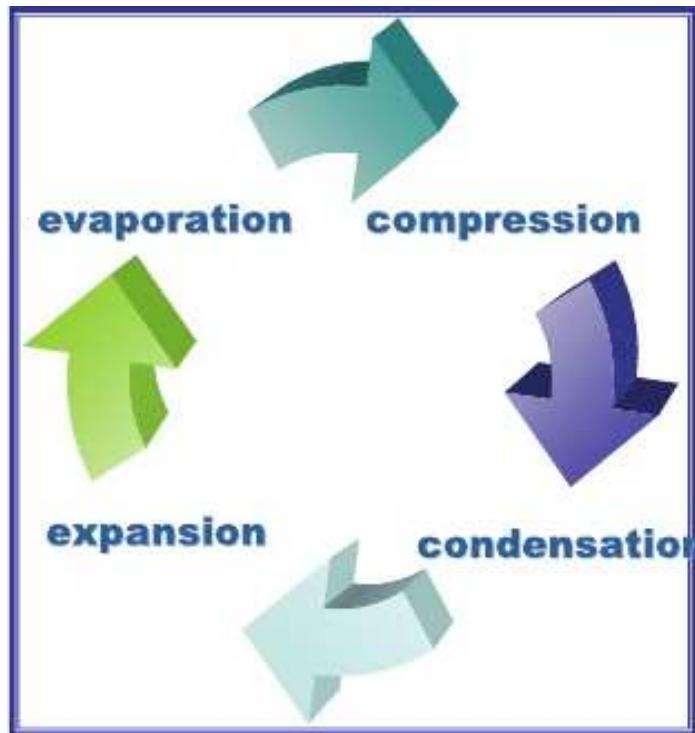

## PRODUCT SPECIFICATIONS

### 2-7-2. Operation theory of refrigeration cycle components

#### ■ Condenser

1) Role: A device which radiates heat to the outside of the refrigerator. As this heat is dispersed, the high temperature/ high pressure vapor refrigerant changes to a liquid state.

2) Types

A. Air-cooling Type : Condense air by circulating naturally or manually.

1) Natural Convection Type : Used for the household refrigerator which has small condensing capacity. (No Fan)

2) Manual Convection Type : Circulate air manually by FAN-Motor (Large capacity)

B. Water-cooling Type : Make cooling water pass through the pipe in the condenser (Large capacity)

※ Location

① CLUSTER heat-radiating type : All Pipes effective for radiating heat are formed in the right/ left, and front side of refrigerator with hard urethanes and radiate heat through the whole surfaces of cabinet to ambient air.

② Install the condenser on the outside of the product. (An old model)

③ Make them cluster at the lower part of product and radiate heat manually by fan.

※ Radiate condensed potential heat up to liquefy completely and make change the state without changing the gas temperature itself.

※ Pipe thickness

① Low pressure: 6.3mm ② High pressure : 4.7mm ③ Capillary : About 0.4-0.8mm

※ Condenser length (Based on 300ℓ): 26.5 M

① Assistance : 5 M ② HOT-PIPE: 6.6 M ③ CLUSTER-PIPE: 4.17 M

#### ■ Capillary

1. Role: A device which makes low temperature and pressure refrigerant by reducing the pressure the normal temperature / high pressure liquid refrigerant condensed from condenser, and supply it to the evaporator.

A. To evaporate more lower temperature in case of evaporation.

B. It flows to the evaporator without back flowing to condenser, if compressor stops, and the difference of pressure between high pressure and low pressure is small so it is easy to operate the compressor again.

2. Outline

A. Thickness : About 0.4-0.8mm

B. Length : It is changeable to low temperature and pressure (10->5mm/mm) depends on the 2M of thin and long copper pipe wall resistance.

## PRODUCT SPECIFICATIONS

### ■ Evaporator

1. Role: As the low pressure liquid refrigerant flowed from capillary absorbs heat inside of the refrigerator, it becomes low pressure gas and refrigerate the foods.
2. Theory: The low pressure refrigerant flowed to evaporator operates cooling which takes ambient evaporated potential heat with maintaining the evaporation up to evaporate completely.
3. Types of Evaporator
  - A. ROLL-BOND Evaporator ... Direct Cooling ONE-DOOR Type
    - ☞ Rolled and adhere the 2 aluminum plate and then make refrigerant passage.
  - B. PIN-PIPE Type ... Indirect cooling TWO-DOOR Type
    - ☞ a small aluminum plate on the aluminum pipe to increase the cooling effect.

### ■ Compressor

1. Role: It operates same as pump which pull out the subterranean water. It inhales the low temperature and pressure refrigerant gas (flowed out) from evaporator and make high temperature and pressure refrigerant liquid in the compressor and send it to the condenser.
2. Type of Condenser
  - a. Back-and-forth motion type: A method that piston makes back-and-forth motion through shaft and cylinder of motor rotation and compresses. ※ Used for household refrigerant
  - b. Rotary Type: A method that inhales the refrigerant gas through the gap between the outside of rotor electric attached on the shaft and the inside of cylinder and compresses.
  - c. Centrifugal Type
3. Please insert the explanation of inverter comp operation theory.

### ■ Dryer

1. Role: Absorb the moisture from the refrigerant that refrigeration cycle circulates and eliminate the foreign substance.
2. Structure: If even some moisture is included refrigerant is impossible to circulate by freezing the small capillary outlet, so silica gel or molecular sieve is (included and) sealed to absorb the internal moisture, and install a minute net to eliminate the foreign substance.

## PRODUCT SPECIFICATIONS

### ※ . Influence of moisture

- ① Moisture precipitation - Blocked by ice
- ② Refrigerant and reaction
- ③ Life reduction of oil
- ④ Acceleration of oxidization
- ⑤ Copper plating phenomenon
- ⑥ Gas dissolution by the interaction of synthetic insulating material (insulator)

### ※ . Influence of foreign substance

- ① Increase of condensed temperature.
- ② Increase of temperature.
- ③ Decrease of cooling efficiency
- ④ Shorten the life by friction between oil and foreign substance in the compressor.


### ■ Accumulator

1. Role : To send a pure refrigerant gas to compressor by removing completely the refrigerant liquid from evaporator.

※ If a refrigerant liquid go into the compressor, overload is occurred.

### 2-7-3. Refrigeration Cycle Type



#### HM Cycle

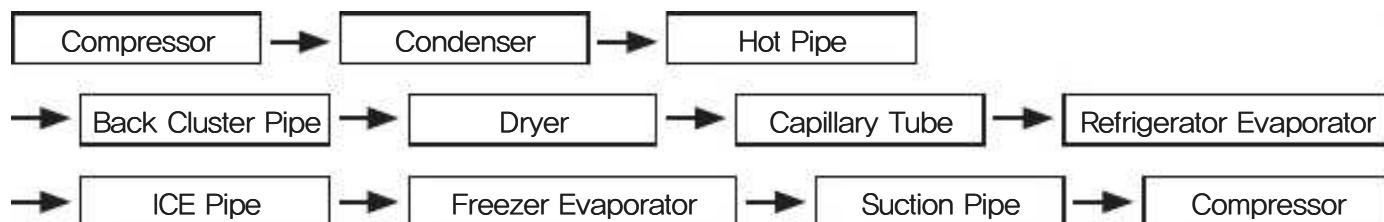



## PRODUCT SPECIFICATIONS

### 2-8) Cooling Air Circulation


#### Refrigerator

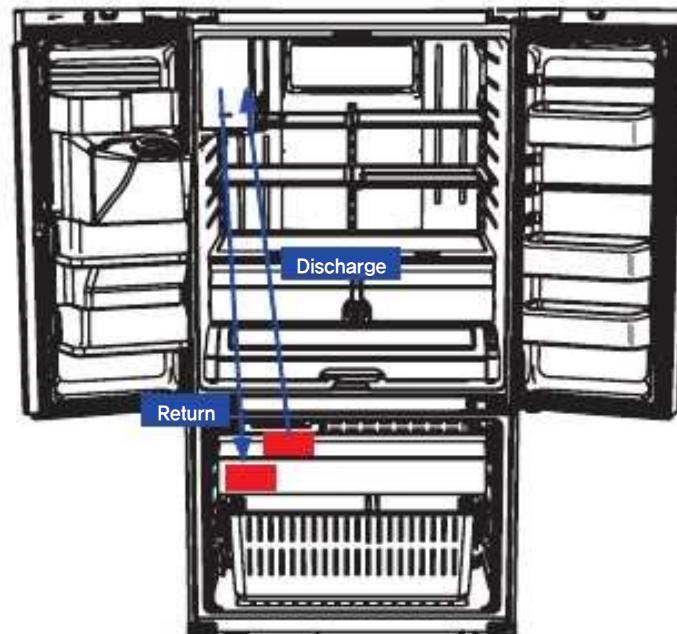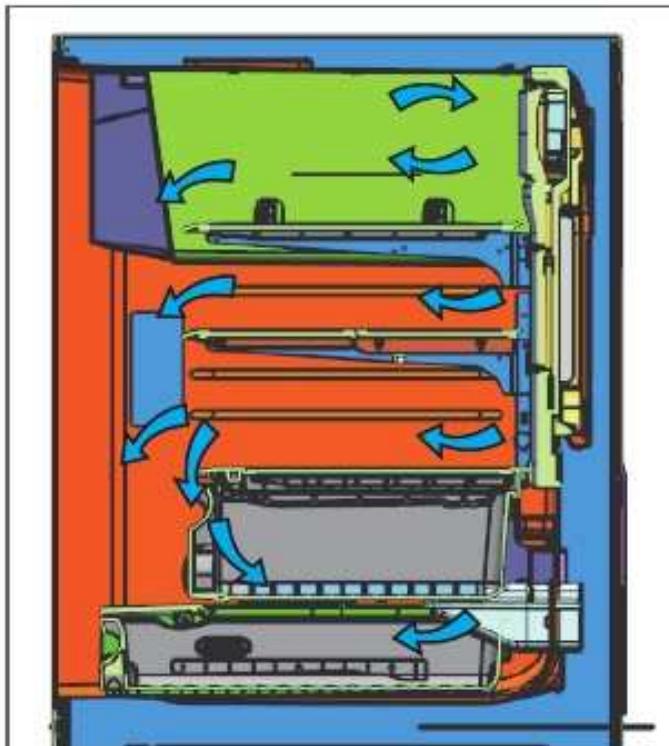

#### Freezer

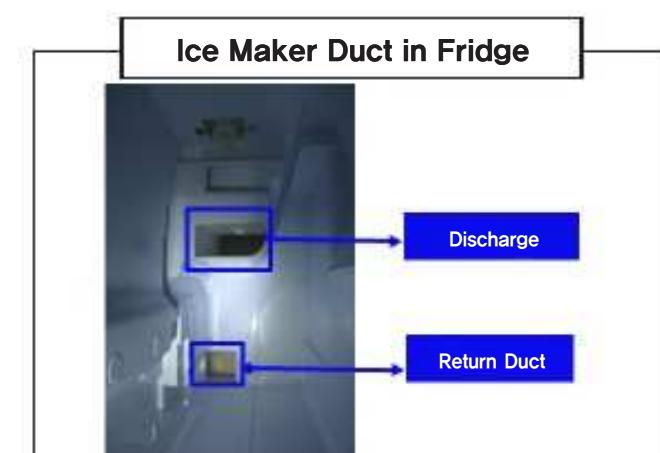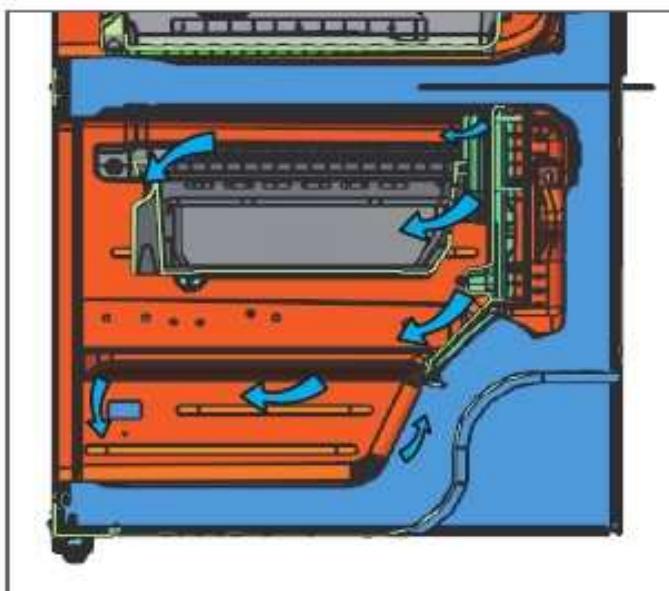

#### Duct in Freezer

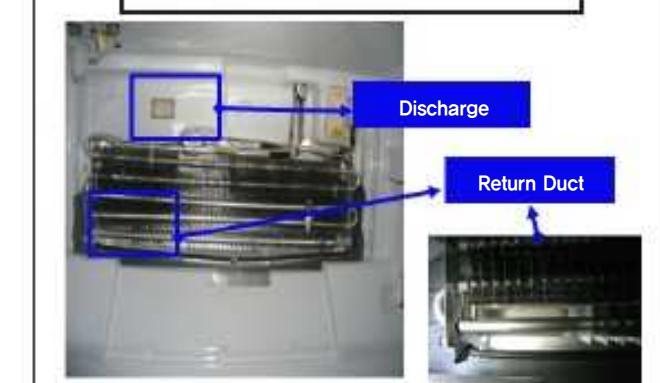

In some cases, frost blocks the return hole in freezer and it may cause weak cooling or No ice making.

### 3. DISASSEMBLY AND REASSEMBLY

3-1) PRECAUTION.....	26
3-2) Refrigerator Door .....	27
3-3) Door Handle Refrigerator.....	29
3-4) Door Handle Freezer.....	29
3-5) Refrigerator Light .....	30
3-6) Cover-Display & Water-Dispenser.....	30
3-7) Water-Dispenser.....	31
3-8) Glass Shelf.....	32
3-9) Foldable Glass Shelf.....	32
3-10) Vegetable & Fruit Drawers Shelf .....	33
3-11) Case Water Filter .....	34
3-12) Cool Select Pantry.....	35
3-13) Motor Damper .....	35
3-14) Water Filter (Assembly & Disassembly) .....	36
3-15) Gallon Door Bin.....	37
3-16) Vertical Hinged Section .....	37
3-17) Evaporator Cover In Refrigerator.....	38
3-18) Evaporator In Refrigerator .....	39
3-19) Freezer Door.....	40
3-20) Ice-Maker .....	41
3-21) Auger Motor Fan .....	43
3-22) Freezer Light .....	44
3-23) Door Switch In Freezer .....	44
3-24) Evaporator Cover In Freezer .....	45
3-25) Evaporator In Freezer .....	45
3-26) Machine Compartment .....	46
3-27) COMPRESSOR .....	48
3-28) Electric Box .....	49

## DISASSEMBLY AND REASSEMBLY

### 3-1) PRECAUTION

- Unplug the refrigerator before cleaning and making repairs.
- Remove any foreign matter or dust from the power plug pins.
  - Otherwise there is a risk of fire.
- Do not use a cord that shows cracks or abrasion damage along its length or at either end.
- Do not plug several appliances into the same multiple power board. The refrigerator should always be plugged into its own individual electrical which has a voltage rating that matched the rating plate.
  - This provides the best performance and also prevents overloading house wiring circuits, which could cause a fire hazard from overheated wires.
- Do not install the refrigerator in a damp place or place where it may come in contact with water.
  - Deteriorated insulation of electrical parts may cause an electric shock or fire.
- The refrigerator must be grounded.
  - You must ground the refrigerator to prevent any power leakages or electric shocks caused by current leakage from the refrigerator.
- Do not put bottles or glass containers in the freezer.
  - When the contents freeze, the glass may break and cause personal injury.
- Do not store volatile or flammable substances in the refrigerator.
  - The storage of benzene, thinner, alcohol, ether, LP gas and other such products may cause explosions.

#### - Required Tools

IMAGE	ITEM	USE
	Phillips Head Driver	Use for assembling and disassembling of screw
	Flat Head Driver	Use for assembling and disassembling of HomeBar, Dispenser, Deli Cartessen Box, Main PBA etc...
	Hex Wrench $\phi$ 2mm	Use for assembling and disassembling of Handle
	Socket Wrench $\phi$ 10mm	Use for assembling and disassembling of Door Hinge

#### - Water whitening phenomenon

All water provided to refrigerators flows through the core filter which is an alkaline water filter. In this process, the pressure in the water that has flowed out of the filter gets increased, and massive oxygen and nitrogen become saturated. When this water flows out in the air, the pressure plummets and the oxygen and nitrogen get supersaturated so that they turn into gas bubbles. The water could look misty due to these oxygen bubbles. It is not because dust or chemicals, just a few seconds later, it will be clean again.

## DISASSEMBLY AND REASSEMBLY

### 3-2) Refrigerator Door

Part Name	How To Do	Descriptive Picture
Refrigerator Door	<ol style="list-style-type: none"> <li>1. Remove the 3 screws holding down the Top Table and remove the Top Table (1)</li> </ol>	
Refrigerator Door	<ol style="list-style-type: none"> <li>2. After pulling the Hinge Lever, remove the Hinge.</li> </ol>	
Refrigerator Door	<ol style="list-style-type: none"> <li>3. Lift the door straightly up to remove.</li> </ol> <p> <b>CAUTION</b> Be careful not to drop the door.</p>	
	<ol style="list-style-type: none"> <li>4. Lift the grommet hinge straightly up to remove.</li> </ol>	
	<ol style="list-style-type: none"> <li>5. With a Philips head screwdriver, remove the screw (6) attached to the lower left and right door hinges. With a 0.4in Hex wrench, remove the 2 flat head screws (7). Remove the lower left and right door hinges (8).</li> </ol>	

## DISASSEMBLY AND REASSEMBLY

### 3-3) Door Handle Refrigerator

Part Name	How To Do	Descriptive Picture
Door Handle Fridge	<ol style="list-style-type: none"> <li>1. Loosen the Set Screw situated at the end of the inner part of handle about 0.1in by using Hex wrench.</li> </ol>	
	<ol style="list-style-type: none"> <li>2. Pull the Set handle out by moving it straight up.</li> </ol> <p> <b>CAUTION</b> Be careful not to scratch or break the parts.</p>	

### 3-4) Door Handle Freezer

Part Name	How To Do	Descriptive Picture
Door Handle Freezer	<ol style="list-style-type: none"> <li>1. Loosen the Set Screw situated at the bottom right of the appliance about 0.1in by using Hex wrench.</li> </ol>	
	<ol style="list-style-type: none"> <li>2. Pull the Set handle out by moving it to the right side.</li> </ol> <p> <b>CAUTION</b> Be careful not to scratch or break the parts.</p>	 

## DISASSEMBLY AND REASSEMBLY

### 3-5) Refrigerator Light

Part Name	How To Do	Descriptive Picture
Refrigerator Light	1. Press the tabs on the back of the Lamp Cover and take it off.	
	2. Remove the 3 screws And separate the LED panel.	

### 3-6) Internal Water Dispenser

Part Name	How To Do	Descriptive Picture
Internal Water Dispenser Cover	1. Remove the internal water dispenser cover by inserting a flat-blade(–) screwdriver to the gap of dispenser with pulling the cover.	
Water Hose Cap	2. Remove the water hose cap by pulling it out. (Refer to the picture)	


## DISASSEMBLY AND REASSEMBLY

### 3-7) Water-Dispenser

Part Name	How To Do	Descriptive Picture
Water-Dispenser	1. Disengage the Housing Connector by pushing a flat-blade screwdriver.	
	2. Remove 2 screws of the Case Ice Route Assy.	
	3. Pull the Case Ice Route Assy.	
	4. Assembly shall be in order from the disassembly. Case-Ice and Route shall be assembled inside of hose. Otherwise, assemble cannot be accomplished.	
	5. When assembling Cover-Display, first insert it from leftside and then assemble to rightside. Otherwise, the hook can be broken.	

## DISASSEMBLY AND REASSEMBLY

### 3-8) Glass Shelf

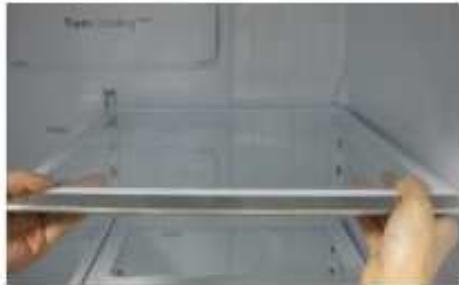Part Name	How To Do	Descriptive Picture
<b>Glass Shelf</b>	Remove the shelf by lifting the front part of the shelf up and pulling it out.	

### 3-9) Foldable Glass Shelf

Part Name	How To Do	Descriptive Picture
<b>Foldable Glass Shelf</b>	Remove 2 screws of the Folderble Glass Shelf	

## DISASSEMBLY AND REASSEMBLY

### 3-10) Vegetable & Fruit Drawers Shelf

Part Name	How To Do	Descriptive Picture
Vegetable & Fruit Drawers Shelf	1. Remove the vegetable & fruit drawer.	
	2. Push the button on the left side of the shelf and lift up to release from the Assembly. (Refer to the picture)	
	3. Remove the vegetable & fruit drawer shelf by pulling it out. (Refer to the picture)	

### 3-11) Cool Select Pantry

Part Name	How To Do	Descriptive Picture
Cool Select Pantry	1. Remove the cool select pantry by pulling the roller part and lifting it up.	
Cool Select Pantry Cover	1. Remove the cool select pantry cover by lifting the central part of the cover while pushing it to the left.	
Cool Select Pantry Shelf	1. Remove the cool select pantry shelf by lifting the front part of the shelf while pulling it.	


## DISASSEMBLY AND REASSEMBLY

### 3-12) Case Water Filter

Part Name	How To Do	Descriptive Picture
	<p>To disassemble the Case Water Filter, remove the water filter and all drawers and shelves.</p>	
	<p>1. a. Remove Cover Tube Fitting (1).  b. Remove the Water tube (blue) from the tube fitting by pushing in on the locking ring (2) and pulling out the tube.</p>	 
Case Water Filter	<p>2. Remove three screws securing the water tubes.</p>	
	<p>3. a. Pull the Water blue hose out.  b. Push the Tube Fitting (3) and pull the grey hose out.</p>	
	<p>4. Disconnect the 2 Housing connectors (4).</p>	
	<p>5. Lift and pull the Case Water Filter out.</p>	

## DISASSEMBLY AND REASSEMBLY

### 3-13) Motor Damper

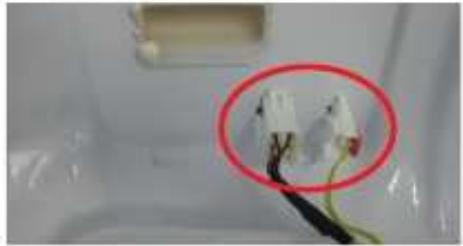Part Name	How To Do	Descriptive Picture
<b>Motor Damper</b>	<ol style="list-style-type: none"><li>1. Remove the cool select pantry. Remove the screw of motor damper part and then push the motor damper down.</li></ol>	
	<ol style="list-style-type: none"><li>2. Disengage 2 housing connectors from the rear motor damper. (Refer to the picture)</li></ol>	

## DISASSEMBLY AND REASSEMBLY

### 3-14) Water Filter (Assembly & Disassembly)

Part Name	How To Do	Descriptive Picture
Water Filter	1. Turn the water filter count-clockwise. (Refer to the picture)	
	2. Remove the water filter by pulling it. (Refer to the picture)	
	3. Push the water filter directly.	
	4. Turn the water filter clockwise until it locked.	



**CAUTION** Be sure to flush the dispenser thoroughly (approx. 6 to 7 minutes), otherwise water may drip from the dispenser. This means that there is still air in the line.

## DISASSEMBLY AND REASSEMBLY

### 3-15) Gallon Door Bin


Part Name	How To Do	Descriptive Picture
Gallon Door Bin (Right)	1. Remove the door bin by moving straight up.	
Gallon Door Bin (Left)	2. a. Remove dis door bin by moving straight up. b. Remove by moving up the left side of door bin.	

### 3-16) Vertical Hinged Section

Part Name	How To Do	Descriptive Picture
Vertical Hinged Section (center mullion attached to left side refrigerator door)	1. Unscrew 2 screws.	
	2. Disengage the internal housing connector of the vertical hinge.   <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged out.	
	3. Remove the vertical hinged section by lifting the vertical hinge up. (Refer to the picture)	

## DISASSEMBLY AND REASSEMBLY

### 3-17) Evaporator Cover In Refrigerator

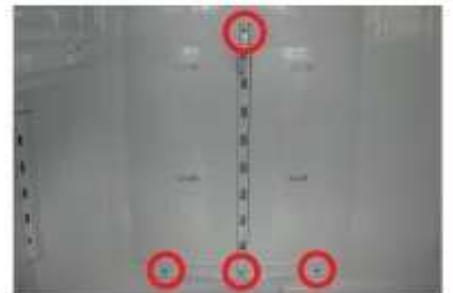Part Name	How To Do	Descriptive Picture
Evaporator Cover In Refrigerator	<p>1. Remove the angle cap with a flat-blade screwdriver. (Refer to the picture)</p> <p> <b>CAUTION</b> Be careful not to scratch or break the parts</p>	
	<p>2. Loosen the 4 screws, which fix the Evaporator cover</p>	
	<p>3. Remove the the lower part of angle mid by pulling it out and pushing it down. (Refer to the picture)</p>	
	<p>4. Lift up the evaporator cover.</p>	
	<p>5. Disconnect the 2 housing connectors. (Refer to the picture)</p> <p> <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.</p>	


## DISASSEMBLY AND REASSEMBLY

### 3-18) Evaporator In Refrigerator

Part Name	How To Do	Descriptive Picture
Evaporator In Refrigerator	<ol style="list-style-type: none"><li>1. Disconnect the housing connector part on left side. <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.</li></ol>	 ⟨Left⟩
	<ol style="list-style-type: none"><li>2. Disconnect the housing connector on right side.</li></ol>	 ⟨Right⟩
	<ol style="list-style-type: none"><li>3. Remove the evaporator by moving it up while holding both of bottom sides</li></ol>	

## DISASSEMBLY AND REASSEMBLY

### 3-19) Freezer Door

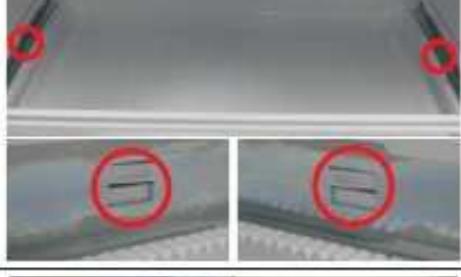Part Name	How To Do	Descriptive Picture
Freezer Door	1. Pull out the Pull Out Drawer by maximum.	
	2. After lifting the Pull Out Drawer up holding both sides, remove it at the rail system.	
	3. Remove the Tilting Pocket(I) by lifting it up	
	4. After lifting the Freezer Guard up holding both sides, remove it at the rail system.	
	5. Press the fixing hook of rail system.	
	6. After holding and pulling out the top of Freezer Door, remove it at the rail system.	
	 <b>CAUTION</b> Make sure there is no scratch at the end of Sliding Rail by being dented from the floor .	

## DISASSEMBLY AND REASSEMBLY

### 3-20) Ice Maker

Part Name	How To Do	Descriptive Picture
Ice Maker	<ol style="list-style-type: none"><li>1. Remove the ice maker by pulling it out.</li></ol>	
	<ol style="list-style-type: none"><li>2. Disconnect the housing connector part.</li></ol>	

## DISASSEMBLY AND REASSEMBLY

### 3-21) Freezer Light


Part Name	How To Do	Descriptive Picture
Freezer Light	<ol style="list-style-type: none"> <li>1. Remove the cover Freezer lamp (II) using a flat-blade screwdriver.</li> </ol>	
	<ol style="list-style-type: none"> <li>2. Disengage the housing.</li> </ol> <p><b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.</p>	

### 3-22) Door Switch In Freezer

Part Name	How To Do	Descriptive Picture
Door Switch In Freezer	<ol style="list-style-type: none"> <li>1. Remove the freezer drawer bin by using a flat-blade(–) screwdriver. (Refer to Section 3-19 Freezer Door). Then remove the freezer light switch.</li> </ol>	
	<ol style="list-style-type: none"> <li>2. Disconnect the housing connector part.</li> </ol> <p><b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.</p>	

## DISASSEMBLY AND REASSEMBLY

### 3-23) Evaporator Cover In Freezer

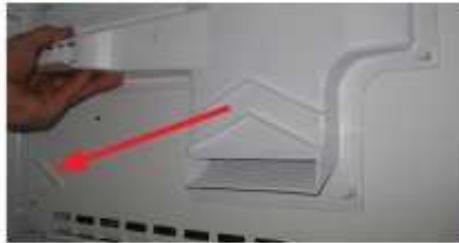Part Name	How To Do	Descriptive Picture
Evaporator Cover In Freezer	1. Loosen the 4 screws, which fix the Evaporator cover.	
	2. Lift up the evaporator cover.	
	3. Disconnect the housing connector on right and remove the evaporator cover.   <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged	

### 3-24) Evaporator In Freezer

Part Name	How To Do	Descriptive Picture
Evaporator In Freezer	1. Disconnect the 2 housing connectors on right side.   <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged	
	2. Remove the evaporator by pulling the lower part of the evaporator while lifting it up.	

## DISASSEMBLY AND REASSEMBLY

### 3-25) Machine Compartment



Part Name	How To Do	Descriptive Picture
Motor Fan	1. Unscrew 5 screws of cover compressor.	
	2. Disengage the housing connector. (Refer to the picture)	 <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.
	3. Remove the bracket of support circuit motor by lifting the bracket up and pulling it out.	
	4. Remove the screw with a flat-blade screwdriver. (Refer to the picture)	
	5. Remove the motor fan by pulling the fan out while holding the motor part. (Refer to the picture)	
	6. Unscrew 2 screws fixed in the motor.	
	7. Remove the hook of the motor cover with a flat-blade (-) screwdriver and then remove the motor.	

## DISASSEMBLY AND REASSEMBLY

Part Name	How To Do	Descriptive Picture
Relay O/L	1. Disengage the housing connector.	
	2. Remove Cover Relay.	
	3. Remove the relay O/L with a flat-blade screwdriver. (Refer to the picture)	

## DISASSEMBLY AND REASSEMBLY

### 3-26) COMPRESSOR

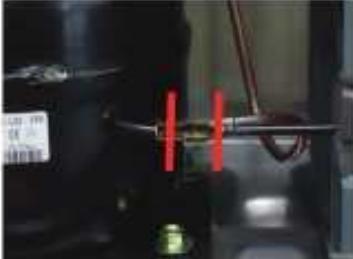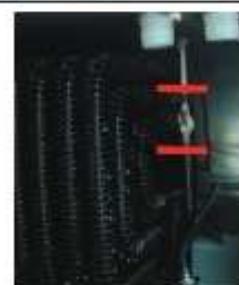Part Name	How To Do	Descriptive Picture
COMPRESSOR	1. Cut off the LOKRING connecting the COMP and the CONDENSER with a Pipe Cutter. (Red-line marking points)	
	2. Cut off the LOKRING connecting the CONDENSER and the HOT PIPE with a Pipe Cutter. (Red-line marking points)	
	3. Link the COMP and the CONDENSER with a PIPE-CONNECTOR (DA81-05659A) by brazing the joint areas.   	
	4. Link the CONDENSER and the HOT PIPE with a PIPE-CONNECTOR (DA81-05659B) by brazing the joint areas.  	

## DISASSEMBLY AND REASSEMBLY

### 3-27) Electric Box

Part Name	How To Do	Descriptive Picture
PBA Main	<ol style="list-style-type: none"> <li>1. Remove the 2 screw attached to the upper left and right Case PCB Panel with a phillips screwdriver(+).</li> </ol>	
	<ol style="list-style-type: none"> <li>2. Disengage all housing connectors from the main PCB.</li> </ol> <p> <b>CAUTION</b> Before doing the above, make sure that the unit is unplugged.</p>	
	<ol style="list-style-type: none"> <li>3. Press the lower locking hook down and remove the Main PBA by pulling it out. (Refer to the picture)</li> </ol>	
PBA INVERTER	<ol style="list-style-type: none"> <li>1. Remove the INVERTER PBA by lifting the upper part of the hook up.</li> </ol>	

## 4. TROUBLESHOOTING

4-1) Function for failure diagnosis.....	51
4-1-1. Test mode (manual operation / manual defrost function).....	51
4-1-2. Display function of Communication error.....	52
4-1-3. Self-diagnostic function .....	53
4-1-4. Display function of Load condition.....	56
4-1-5. Exhibition mode setting function.....	57
4-1-6. Option setting function.....	58
4-1-7. Option TABLE .....	60
4-2) Diagnostic method according to the trouble symptom(Flow Chart).....	62
4-2-1. If the trouble is detected by self-diagnosis .....	64
4-2-2. If FAN does not operate .....	75
4-2-3. If ICE Room Fan does not operate.....	76
4-2-4. When ICE MAKER(FF) does not operate .....	77
4-2-5. When ICE MAKER(FZ) does not operate.....	78
4-2-6. If defrost does not operate (F,R DEF Heater).....	79
4-2-7. When Power is not applied .....	80
4-2-8. When Compressor does not run (Inverter COMP.) .....	81
4-2-9. When alarm sounds continuously without stop(related with buzzer sound).....	82
4-2-10. When the Panel PCB does not operate normally .....	84
4-2-11. If Pantry Panel PCB is not working normally .....	85
4-2-12. When refrigerator ROOM Lamp does not light up.....	86
4-2-13. If ICE Water is not supplied.....	87
4-2-14. If Cubed or Crushed Ice is not supplied.....	89
4-2-15. If Cover Ice Route Motor(Geared Motor) is not working normally .....	90
4-2-16. IR Sensor Trouble-Shooting.....	91
4-2-17. LED blinking frequency depending on protecting functions .....	92
SPM FREEWHEELING DIODE VOLTAGE VALUE.....	93

## TROUBLESHOOTING

### 4-1) Function for failure diagnosis

#### 4-1-1. Test mode (manual operation / manual defrost function)

- If Power Freezer + Fridge key on the front of panel are pressed simultaneously for 8 seconds , it will be changed to the test mode and all displays on the front of panel will be off.
- If any key on the front of panel is pressed within 15 seconds after the test mode, it will be operated as below sequence :  
Manual operation1(FF) Manual operation2(OF-r) -> manual defrost of fresh food compartments(rd) -> manual defrost of fresh and freezer compartments(fd) -> cancel(Display all off).
- If any key on the front of panel is not pressed within 15 seconds after the test mode, the test mode will be canceled and it will be returned to previous mode.

##### 1) Manual operation function



① Power Freezer key + Fridge Key are pressed simultaneously for 8 seconds, (displays are all off)

It will be changed to the test mode (manual operation) by pressing any key

- 1-1) If any key is pressed once in test mode, blinks "FF" on the display and it indicates the refrigerator has entered the manual operation. At this moment, buzzer beeps as an alarm.
- 1-2) If any key is pressed once at the manual operation1 status, OF-r will be displayed.  
FF and OF-r means manual operation 1 and 2 separately. These 2 functions operate with same RPM of COMP.
- 1-3) If manual operation is selected, compressor will run at once without 7 minutes delay in any mode.  
If the refrigerator is on the defrost cycle at the moment, defrost will be finished and manual operation will begin.  
(Be careful if manual operation get started at the moment of compressor off, over load could be occurred)

Compulsion working 1 : 3600RPM

Compulsion working : 3600RPM



- 1-4) If manual operation works, compressor & f-fan operate continuously for 24 hours and fresh food compartment will be controlled by the setting temperature.
- 1-5) When the manual operation runs, setting temperature will be selected automatically as below: freezer compartment -8°F(-22°C), fresh food compartment 34°F(1°C).
- 1-6) During manual operation, Freezer Key & Power Cool function will not be work.  
If a function is selected, the power function icon of the selected function will be off automatically after 10 seconds.
- 1-7) Manual operation can be canceled by removing power from the unit, then resupplying power.
- 1-8) Alarm(0.25 sec ON/ 0.75 sec OFF) will beep continuously until manual operation is completed and there is no function to make the sound stop.

## TROUBLESHOOTING

### 2) Forced Defrost



- 2-1) When you press any key one more time at Fridge off Forced Operation [OF r], rd lights up on the Display Panel. At this time, the Forcd Operation stops immediately and R-Defrost will be performed at the same time.
- 2-2) When you press any key one more time at Forced R-Defrost [rd], Fd lights up on the Display Panel. At this time, FR-Defrost will be performed at the same time.
- 2-3) At this time, it will send out "Beep" sound for 2 seconds and then it will perform Forced F/R Defrost while sending out "0.5 sec On and 0.5 sec Off" sound.

### 3) Test cancel mode

- 3-1) During the simultaneous defrosting of fresh food and freezer compartments, if the display panel change to the test mode and test button is pressed one more time, defrosting of fresh food and freezer compartments will be canceled and the unit will return to the normal operation.  
Or, all test functions will be canceled by turning main power ON and OFF.

### 4-1-2. Display function of Communication error

#### 1) Display function when Panel → MAIN MICOM communication has error

- 1-1) If there is no answer for 10 seconds after the panel micom received the requirement of communication, "Pc - Er" display on the panel PCB will be ON/OFF alternately until the communication error is canceled. (0.5 sec ALL ON, 0.5 sec ALL OFF alternately)



- 1-2) "Pc - Er" display on the Pantry Room Display will be ON/OFF alternately until the communication error is canceled. (0.5 sec ALL ON, 1.5 sec ALL OFF alternately)

#### 2) Display function when Panel → MAIN MICOM OPTION has error


- 2-1) "OP - Er" code is repeatedly ON/OFF until Option error settles down.

## TROUBLESHOOTING

### 4-1-3. Self-diagnostic function

#### 1) Self-diagnostic function in the Initial power ON

- 1-1) Micom operates self-diagnostic function to check the temperature sensor condition within 1 second when the refrigerator turned On initially.
- 1-2) If bad sensor is detected by the self-diagnostic function, the applicable display LED will blink for 0.5 sec. At this moment, there is no beep sound.(Refer to self-diagnostic CHECK LIST)
- 1-3) Self-diagnostic button is recognized only when the error is displayed by the bad sensor. Display does not operate normally but temperature control will be controlled by the emergency operation.
- 1-4) When the error is detected by self-diagnosis, the error can be canceled automatically if all troubled sensors are corrected or Self-diagnostic function key (Power Freezer key + Power Fridge key) are pressed simultaneously for 8 seconds.  
(Return to normal display mode)

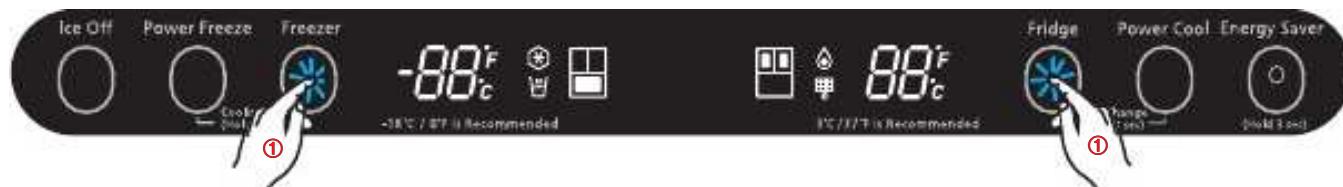

- ① If Power Freezer key + Power Fridge key are pressed simultaneously for 8 seconds, the error mode by self-diagnosis will be canceled.

#### 2) Self-diagnostic function during normal operation



- ① If Power Freezer key + Power Fridge key are pressed simultaneously for 8 seconds, the error mode by self-diagnosis will be canceled.

- 2-1) If Power Freezer key + Power Fridge key are pressed simultaneously for 6 seconds during normal operation, the temperature setting display will operate for 2 seconds (ON/OFF 0.5sec each).  
If Power Freezer key + Power Fridge key are pressed simultaneously for 8 seconds (including above 2 seconds), self-diagnostic function will be selected.
- 2-2) At this moment, self-diagnostic function will be returned with buzzer sound 'ding-dong'.  
If there is an error, display of error will be operated for 30 seconds and then return to normal condition whether problem is corrected or not.  
(Refer to self-diagnosis CHECK LIST)
- 2-3) Input by button is not accepted during self-diagnostic function.

## TROUBLESHOOTING


※ R Self-diagnostics check list

LED		Item	Trouble contents	Diagnostic method
F	R			
88	88	FZ-Sensor Error	Display error : separation of sensor housing part, contact error, disconnection, short circuit. Display error of detecting temperature of sensor : more than 149°F(+65°C) or less than -58°F(-50°C)	When measuring the voltage between the Main PCB CN30—"4" → CN76—"1", it should read between 4.5V~1.0V.
88		FF-Sensor Error		When measuring the voltage between the Main PCB CN30—"5" → CN76—"1", it should read between 4.5V~1.0V.
88		FZ-DEF-Sensor Error		The voltage of MAIN PCB CN30—"5" → N76—"1": shall be between 4.5V~1.0V
88		FF-DEF-Sensor Error		When measuring the voltage between the Main PCB CN30—"8" → CN76—"1", it should read between 4.5V~1.0V.
88		Ambient-Sensor Error		The voltage of MAIN PCB CN78—"8" → CN78—"12": shall be between 4.5V~1.0V
88		PANTRY-Sensor Error		The voltage of MAIN PCB CN78—"9" → CN76—"1": shall be between 4.5V~1.0V
88		Ice Maker(F) Sensor Error		The Voltage of MAIN PCB CN90 #8<→#9: Shall be between 4.5v ~ 1.0v
88		Humidity-Sensor Error		When measuring the voltage between the Main PCB CN30—"3" → CN76—"1", it should read between 4.5V~1.0V.
88		FZ-FAN Error		The voltage of MAIN PCB CN76—"3"(Yellow) → CN76—"1"(Gray): shall be between 7V~12V
88		FF-FAN Error		The voltage of MAIN PCB CN76—"4"(Orange) → CN76—"1"(Gray): shall be between 7V~12V
88		C-FAN Error		The voltage of MAIN PCB CN76—"5"(Sky-blue) → CN76—"1"(Gray): shall be between 7V~12V
88		FZ-DEF Error		After separating MAIN PCB CN70 wire from PCB, resistance value between CN70 Brown → CN70 Gray shall be 63(230) ohm ± 7%.(Resistance value is varied by input power) 0 ohm : heater short, ∞ ohm : wire/bimetal open (Must power off)
88		FF-DEF Error		After separating MAIN PCB CN70 wire from PCB, resistance value between CN70 White → CN70 Gray shall be 120(440) ohm ± 7%.(Resistance value is varied by input power) 0 ohm : heater short, ∞ ohm : wire/bimetal open (Must power off)
88		Ice Maker(FZ) Function Error		After replacing the Ice Maker, check if it operates normal.

## TROUBLESHOOTING


※ R Self-diagnostics check list

LED	Item	Trouble contents	Diagnostic method
F	R		
88	"Flex Zone-Damper-Heater Error"	Display error when open error is detected by damper heater : separation of Damper Heater housing part, contact error, disconnection, short circuit.	After separating MAIN PCB CN77 wire from PCB, resistance value between Black → Brown wire shall be $135\text{ ohm} \pm 7\%$ . 0 ohm : heater short, $\infty\text{ Ohm}$ : wire / bimetal Open.
89	FZ-Ice Pipe Heater Error	The error occurs when there is a wire connector slip-out of the Water Supply Pipe Heater, a contact error or a breakage in the wiring.	When measuring the resistance of the Main PCB CN79 Yellow-Pink wires, it should be within $102\Omega \pm 7\%$ . $0\Omega$ : heater short, $\infty\Omega$ : Check for Wire Open or Connector Slip-out
48	Panel → Main Communication Error	Display pc – Er in the panel with alarm : MICOM MAIN → PANEL communication error.	Actually, If there is not a problem, it is desirable to replace Main and Panel PCB With the oscilloscope after a cable problem confirming.
88	Comp starting Failure Error	When the Compressor fails starting	Check if there is a short between compressor terminals. Check IPM Voltage [Under 13.5V] Check if there is a short between IPM Pins [#1~33] Check the Compressor and the Cycle
88	IPM Fault Error	When there is a IPM Fault error	Check the Compressor and the Cycle
88	Comp Abnormal current Detection Error	When ther is abnormal current detected at the Compressor	Check the Compressor connections Check the voltage of Resistance of R308 [0.090Ohm] Check the Compressor and the Cycle
88	Motor Locked Over RPM Error	When there is a Compressor restriction error	Check the voltage of Resistance of R308 [Short/Open] Check the voltage of both of C103 terminals [Unstable Voltage] Check the Compressor and the Cycle
89	Comp under voltage Error	When there is a low voltage error	Check the voltage of Resistance of R513 [Short/Open]
88	Comp over voltage Eroor	When there is a over voltage error	Check the voltage of Resistance of R501, R505, R509 [Short/Open]

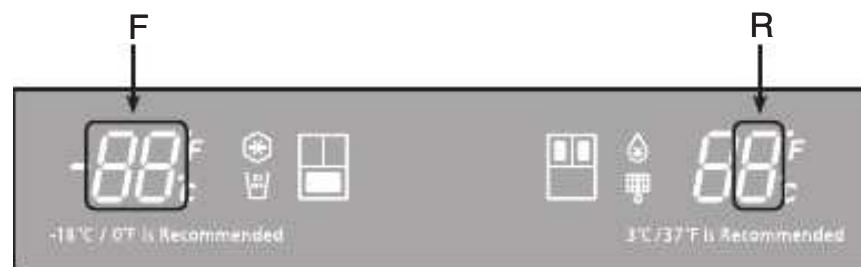


## TROUBLESHOOTING

### 4-1-4. Display function of Load condition

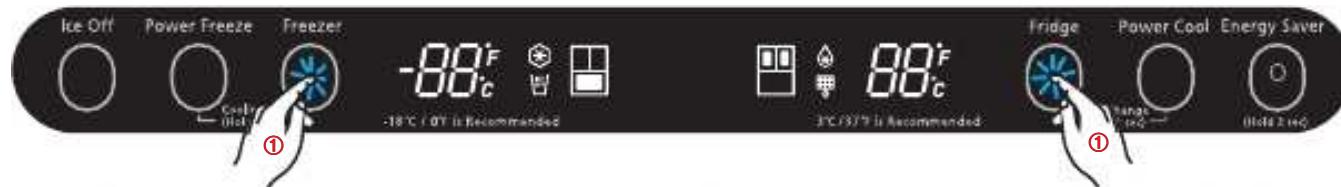

- ① If Power Freezer key + Power Fridge key are pressed simultaneously for 6 seconds, ALL ON/OFF will blink with 0.5 interval for 2 seconds.
- ② If take the finger off from above keys and press Fridge, load condition mode will be started.

- 1) If Power Power Freezer key + Power Fridge key are pressed simultaneously for 6 seconds during normal operation, the temperature setting display of fresh food and freezer compartments will blink ALL ON/OFF with 0.5 for 2 seconds.
- 2) At this moment, If Fridge Key after Power Freezer key + Power Fridge key is pressed, load condition display mode will be returned with alarm. At LED all on state, only load condition display will blink ON/OFF with 0.5 seconds interval.
- 3) Load condition display mode shows the load that micom signal is outputting.  
However, It means that micom signal is outputting, it does not mean whether load is operating or not. That is to say that though load operation is displayed, load could not be operated by actual load error or PCB relay error etc. (This function would be applied at A/S.)
- 4) Load condition display function will maintain for 30 seconds and then normal condition will be returned automatically.
- 5) Load condition display is as below.



## TROUBLESHOOTING

### ※ R Load mode Check list

Display LED	Display contents	Operation contents
R-1-ⓐ	R-FAN High	When FF compartment FAN operates with high speed, applicable LED ON
R-1-ⓑ	R-FAN Low	When FF compartment FAN operates with low speed, applicable LED ON
R-1-ⓒ	R-DEF Heater	When FF compartment defrost heater operates, LED ON
R-1-ⓓ	Start Mode	When refrigerator is plugged initially, LED ON
R-1-ⓔ	Overload condition	When ambient temperature is more than 93°F(34°C), LED ON
R-1-ⓕ	Low temperature condition	When ambient temperature is less than 72°F(22°C), LED ON
R-1-ⓔ,ⓕ (ALL LED Off)	Normal Condition	When ambient temperature is between 73°F(23°C) and 91°F(33°C)
R1-ⓐ	Exhibition Mode	LED ON at the display mode.
F-1-ⓐ	COMP.	When COMP operates, applicable LED ON.
F-1-ⓑ	F-FAN High	When FZ compartment FAN operates with high speed, applicable LED ON.
F-1-ⓒ	F-FAN Low	When FZ compartment FAN operates with low speed, applicable LED ON.
F-1-ⓓ	F-DEF Heater	When FZ compartment defrost heater operates, LED ON
F-1-ⓔ	C-FAN High	When compressor FAN operates with high speed, applicable LED ON.
F-1-ⓕ	C-FAN Low	When compressor FAN operates with low speed, applicable LED ON.
F-10-ⓐ	French Heater	When French heater operates, applicable LED ON
R-10-ⓐ	Pantry Room Damper Open	When damper open, applicable LED ON
R-10-ⓔ	Ice maker full	When the Ice Maker's Bucket is full, applicable LED ON in RZ-room
R-10-ⓕ	More Heater	Add to Assy Water Pipe Heater in Fre-room

### 4-1-5. Exhibition mode setting function



① If Power Freezer key + Power Fridge key are pressed for 5 seconds, Exhibition mode will be started.

- 1) If Power Freezer key + Power Fridge key are pressed simultaneously for 5 seconds during normal operation, Exhibition mode will be started with buzzer sound(ding-dong).
- 2) If above Power Freezer key + Power Fridge key are pressed one more time, Exhibitoin mode will be canceled.
- 3) If Exhibition mode is selected, blinks "OF-OF" on the temperature setting display of . The panel and it indicates the refrigerator has entered the Cooling Off mode.
- 4) During Exhibition mode, if fresh food and freezer compartments sensors are higher than 149°F(65°C). Exhibition will be canceled automatically and freezing operation will be returned.  
(There is no buzzer sound when the Exhibition mode is canceled by the temperature.)
- 5) Operation contents of Exhibition Mode
  - Display, Fan motor and etc operate normally, not to operate compressor only.
  - Defrost is not operated. (including french heater)
  - Display function of the initial real temperature is finished.
  - Under the condition of Exhibition mode, Exhibition mode will be operated when Power On after Power OFF.

## TROUBLESHOOTING

### 4-1-6. Option setting function


- If Freezer Key+ IPower Fridge key are pressed simultaneously for 12 seconds during normal operation, fresh food and freezer compartments temperature display will be changed to option setting mode.

#### KEY operation method for changing to option mode



- If Freezer Key+ Power Fridge key are pressed simultaneously for 12 seconds, option setting mode will be started.

#### KEY control method after converting to option mode

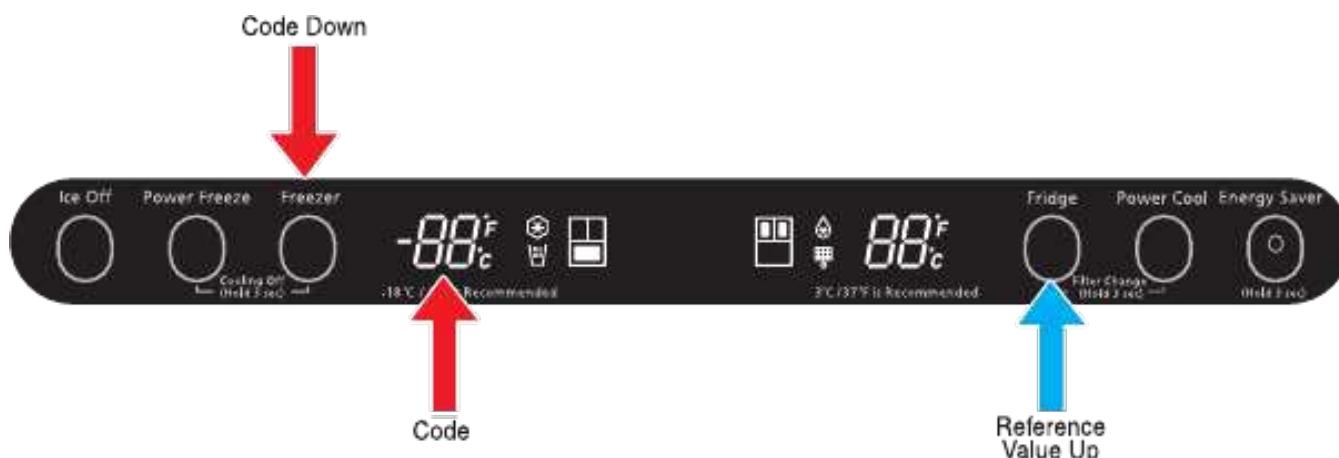


#### ※ R Key control in option mode

Power Freezer key	Code Down key
Freezer Key	Code Up key
Power Fridge key	Reference Value down key
Fridge key	Reference Value Up key

- If the display changes to option setting mode, all displays will be off except freezer and fridge compartments temperature display as below.

(Fresh food and freezer compartments case will be explained only because all options are operated with the same method according to the option table.)

## TROUBLESHOOTING

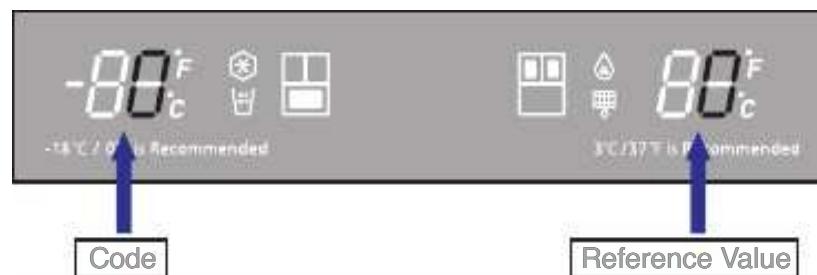


- 1) For example, if you want to change freezer compartment standard temperature to -4°F(-2°C) by operating option, do as below. This function is for changing the standard temperature.  
 In -2°F(-19°C) of current temperature of freezer compartment, if you make the temperature lower to -4°F(-2°C) by the option, the standard temperature would be controlled -6°F(-21°C)  
 Therefore, if you change the setting of temperature option to -2°F(-19°C) on the panel, the appliance will be operated with -6°F(-21°C). It means that standard temperature is controlled -4°F(-2°C) less than setting temperature in the display.



Basically, all the data in option has cleared from the factory.  
 Therefore, almost all setting value are "0".  
 But, some setting values could be changed for the purpose of improving performance.  
 You need to check the product manual and/or specification.

- 2) After changing to the option mode, fresh food compartment "0" , freezer compartment "0" will be displayed.  
 ( Basically fresh food compartment "0", freezer "0" would be set at shipping process, but setting value could be changed for the purpose of improving product at mass producing process.)  
 - If fresh food compartment "0" shows only, temperature reference value of freezer compartment will be set and current freezer compartment temperature code will be displayed on the freezer temperature display.
- 3) If freezer compartment "4" is set as below freezer compartment code after fresh food compartment "0" is set, standard temperature of freezer compartment will be lower than -4°F(-2.0°C).  
 (Refer to the picture "changing the freezer compartment temperature")

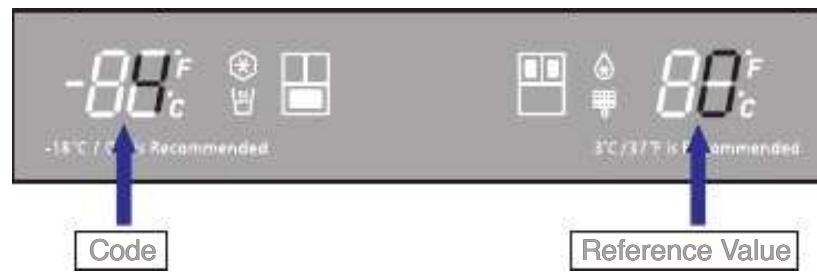

: If you wait for 20 seconds after completing the setting, MICOM will save the setting value to the EEPROM and normal display will be returned and the option setting mode will be canceled.

- 4) Option changing method as above is the same.
- 5) By the same method as above, it is possible to control the fresh food compartment temperature, water supply, ice-maker harvest temperature/time, defrost return time, hysteresis by temperature, notch gap by temperature etc.
- 6) Option function is set in the EEPROM at shipping process in the factory.  
 You would better not to change the option of your own.  
 Completing the setting is that option function return to normal display after 20 seconds.  
 Do not turn off the appliance before returning to the normal display mode.



Option setting function exists in the other items.  
 We will skip the explanation of the other functions by the option because it is associated with refrigerator control function and is not needed at SERVICE.  
 (Please do not set the other options except above SERVICE Manual.)


## TROUBLESHOOTING

### 4-1-7. Option TABLE

#### 1) Temperature changing table of freezer compartment

Set item	Freezer Temp Shift
MODEL	RF260B**, RF261B**
Reference	Fridge Room 7-SEG
Value	0

Setting value	Temp. compensation
FZ compartment Code	
0	0°F(0.0°C)
1	-1°F(-0.5°C)
2	-2°F(-1.0°C)
3	-3°F(-1.5°C)
4	-4°F(-2.0°C)
5	-5°F(-2.5°C)
6	-6°F(-3.0°C)
7	-7°F(-3.5°C)
8	+1°F(+0.5°C)
9	+2°F(+1.0°C)
10	+3°F(+1.5°C)
11	+4°F(+2.0°C)
12	+5°F(+2.5°C)
13	+6°F(+3.0°C)
14	+7°F(+3.5°C)
15	+8°F(+4.0°C)

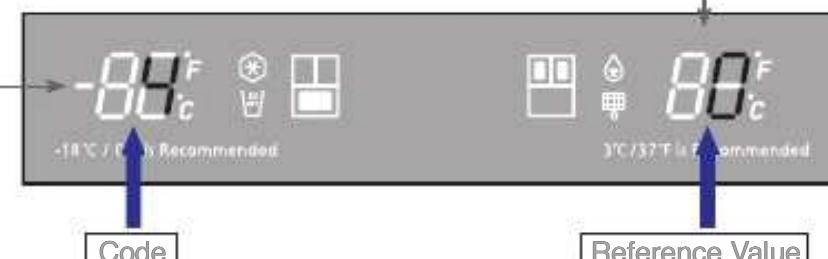


ex) If you want to change the freezer standard temperature to -4°F (-2°C)

#### 2) Temperature changing table of fresh food compartment

Set item	Freezer Temp Shift
MODEL	RF260B**, RF261B**
Reference	Fridge Room 7-SEG
Value	1


Setting value	Temp. compensation
FZ compartment Code	
0	0°F(0.0°C)
1	-1°F(-0.5°C)
2	-2°F(-1.0°C)
3	-3°F(-1.5°C)
4	-4°F(-2.0°C)
5	-5°F(-2.5°C)
6	-6°F(-3.0°C)
7	-7°F(-3.5°C)
8	+1°F(+0.5°C)
9	+2°F(+1.0°C)
10	+3°F(+1.5°C)
11	+4°F(+2.0°C)
12	+5°F(+2.5°C)
13	+6°F(+3.0°C)
14	+7°F(+3.5°C)
15	+8°F(+4.0°C)

ex) If you want to change the freezer compartment standard temperature to 4°F (2°C)

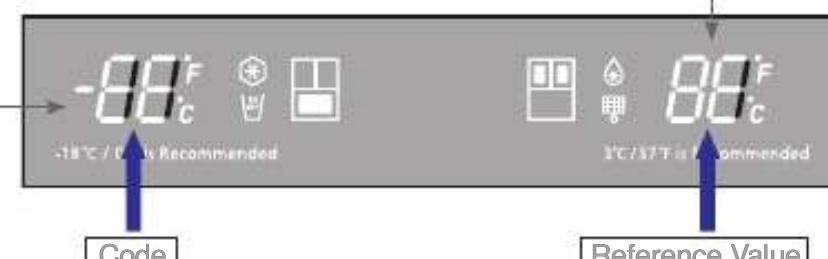


## TROUBLESHOOTING

3) Temperature changing table of ICE ROOM compartment .

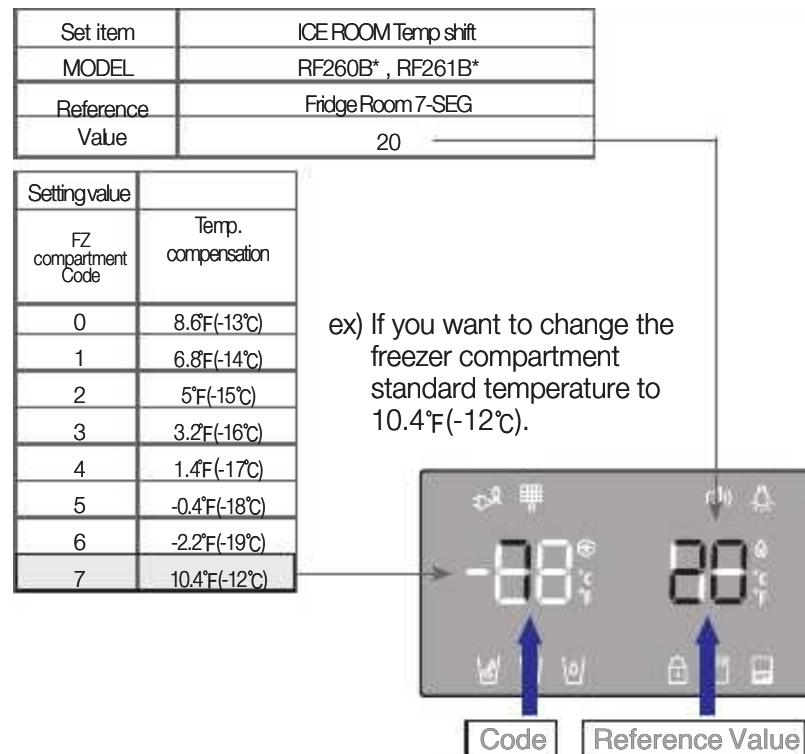

4) Temperature changing table of Pantry Room compartment

- Could change the temperature of Pantry Room in fresh food compartment.

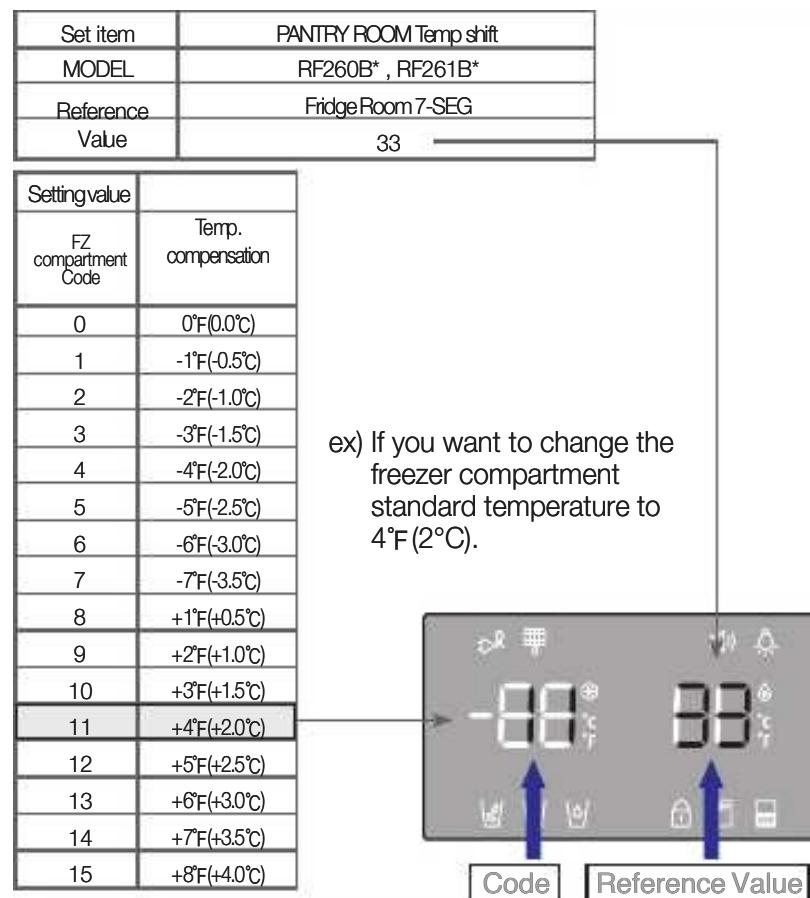

## TROUBLESHOOTING

### 4-2) Diagnostic method according to the trouble symptom(Flow Chart)

#### DATA1.Temperature table

Resistance value and MICOM port voltage of sensor according to the temperature

SENSOR CHIP : based on PX41C, PX41C, 502AT/ 103\*\* (ICE MAKER SENSOR(MOLD)/FULL UP, 20Kohm  
( Actual measurement = value of the table below X 2 )

°C	°F	Voltage	Resistance	°C	°F	Voltage	Resistance	°C	°F	Voltage	Resistance
-50	-58	4.694	153319	-5	23	3.107	16419	40	104	1.153	2997
-49	-56.2	4.677	144794	-4	24.8	3.057	15731	41	105.8	1.124	2899
-48	-54.4	4.659	136798	-3	26.6	3.006	15076	42	107.6	1.095	2805
-47	-52.6	4.641	129294	-2	28.4	2.955	14452	43	109.4	1.068	2714
-46	-50.8	4.622	122248	-1	30.2	2.904	13857	44	111.2	1.040	2627
-45	-49	4.602	115631	0	32	2.853	13290	45	113	1.014	2543
-44	-47.2	4.581	109413	1	33.8	2.802	12749	46	114.8	0.988	2462
-43	-45.4	4.560	103569	2	35.6	2.751	12233	47	116.6	0.963	2384
-42	-43.6	4.537	98073	3	37.4	2.700	11741	48	118.4	0.938	2309
-41	-41.8	4.514	92903	4	39.2	2.649	11271	49	120.2	0.914	2237
-40	-40	4.490	88037	5	41	2.599	10823	50	122	0.891	2167
-39	-38.2	4.465	83456	6	42.8	2.548	10395	51	123.8	0.868	2100
-38	-36.4	4.439	79142	7	44.6	2.498	9986	52	125.6	0.846	2036
-37	-34.6	4.412	75077	8	46.4	2.449	9596	53	127.4	0.824	1973
-36	-32.8	4.385	71246	9	48.2	2.399	9223	54	129.2	0.803	1913
-35	-31	4.356	67634	10	50	2.350	8867	55	131	0.783	1855
-34	-29.2	4.326	64227	11	51.8	2.301	8526	56	132.8	0.762	1799
-33	-27.4	4.296	61012	12	53.6	2.253	8200	57	134.6	0.743	1745
-32	-25.6	4.264	57977	13	55.4	2.205	7888	58	136.4	0.724	1693
-31	-23.8	4.232	55112	14	57.2	2.158	7590	59	138.2	0.706	1642
-30	-22	4.199	52406	15	59	2.111	7305	60	140	0.688	1594
-29	-20.2	4.165	49848	16	60.8	2.064	7032	61	141.8	0.670	1547
-28	-18.4	4.129	47431	17	62.6	2.019	6771	62	143.6	0.653	1502
-27	-16.6	4.093	45146	18	64.4	1.974	6521	63	145.4	0.636	1458
-26	-14.8	4.056	42984	19	66.2	1.929	6281	64	147.2	0.620	1416
-25	-13	4.018	40938	20	68	1.885	6052	65	149	0.604	1375
-24	-11.2	3.980	39002	21	69.8	1.842	5832	66	150.8	0.589	1335
-23	-9.4	3.940	37169	22	71.6	1.799	5621	67	152.6	0.574	1297
-22	-7.6	3.899	35433	23	73.4	1.757	5419	68	154.4	0.560	1260
-21	-5.8	3.858	33788	24	75.2	1.716	5225	69	156.2	0.546	1225
-20	-4	3.816	32230	25	77	1.675	5039	70	158	0.532	1190
-19	-2.2	3.773	30752	26	78.8	1.636	4861	71	159.8	0.519	1157
-18	-0.4	3.729	29350	27	80.6	1.596	4690	72	161.6	0.506	1125
-17	1.4	3.685	28021	28	82.4	1.558	4526	73	163.4	0.493	1093
-16	3.2	3.640	26760	29	84.2	1.520	4369	74	165.2	0.481	1063
-15	5	3.594	25562	30	86	1.483	4218	75	167	0.469	1034
-14	6.8	3.548	24425	31	87.8	1.447	4072	76	168.8	0.457	1006
-13	8.6	3.501	23345	32	89.6	1.412	3933	77	170.6	0.446	978
-12	10.4	3.453	22320	33	91.4	1.377	3799	78	172.4	0.435	952
-11	12.2	3.405	21345	34	93.2	1.343	3670	79	174.2	0.424	926
-10	14	3.356	20418	35	95	1.309	3547	80	176	0.414	902
-9	15.8	3.307	19537	36	96.8	1.277	3428	81	177.8	0.404	877
-8	17.6	3.258	18698	37	98.6	1.253	3344	82	179.6	0.394	854
-7	19.4	3.208	17901	38	100.4	1.213	3204	83	181.4	0.384	832
-6	21.2	3.158	17142	39	102.2	1.183	3098	84	183.2	0.375	810

## TROUBLESHOOTING

### DATA2. Humidity Sensor table

- Voltage output table @23°..., 5Vdc --- HTG3515CH/HTG3535CH

RH(Temperature compensate) = RH (Relative Humidity) + (Temp(°C) °C 23°C) x 0.05

°C	°F	Voltage	Resistance	°C	°F	Voltage	Resistance	°C	°F	Voltage	Resistance
0	909	186	744	46	2246	460	1839	92	3452	706	2827
1	943	193	772	47	2272	465	1861	93	3478	712	2848
2	977	200	800	48	2298	470	1882	94	3504	717	2870
3	1010	207	827	49	2324	475	1903	95	3530	722	2891
4	1043	213	854	50	2350	481	1925	96	3566	730	2920
5	1076	220	881	51	2376	486	1946	97	3595	735	2944
6	1109	227	908	52	2402	491	1967	98	3624	741	2968
7	1141	233	935	53	2428	497	1989	99	3653	747	2992
8	1173	240	961	54	2454	502	2010	100	3683	754	3016
9	1205	247	987	55	2480	507	2031				
10	1235	253	1011	56	2505	513	2052				
11	1266	259	1037	57	2530	518	2072				
12	1297	265	1062	58	2555	523	2093				
13	1328	272	1088	59	2580	528	2113				
14	1359	278	1113	60	2605	533	2133				
15	1390	284	1138	61	2630	538	2154				
16	1420	291	1163	62	2655	543	2174				
17	1450	297	1188	63	2680	548	2195				
18	1480	303	1212	64	2705	553	2215				
19	1510	309	1237	65	2730	559	2236				
20	1540	315	1261	66	2756	564	2257				
21	1569	321	1285	67	2782	569	2278				
22	1598	327	1309	68	2808	575	2300				
23	1627	333	1333	69	2834	580	2321				
24	1656	339	1356	70	2860	585	2342				
25	1685	345	1380	71	2886	590	2364				
26	1713	350	1403	72	2912	596	2385				
27	1741	356	1426	73	2938	601	2406				
28	1769	362	1449	74	2964	606	2428				
29	1797	368	1472	75	2990	612	2449				
30	1825	373	1495	76	3017	617	2471				
31	1852	379	1517	77	3044	623	2493				
32	1879	384	1539	78	3071	628	2515				
33	1906	390	1561	79	3098	634	2537				
34	1933	395	1583	80	3125	639	2559				
35	1960	401	1605	81	3152	645	2581				
36	1986	406	1627	82	3179	650	2604				
37	2012	412	1648	83	3206	656	2626				
38	2038	417	1669	84	3233	661	2648				
39	2064	422	1690	85	3260	667	2670				
40	2090	428	1712	86	3288	673	2693				
41	2116	433	1733	87	3316	678	2716				
42	2142	438	1754	88	3344	684	2739				
43	2168	444	1776	89	3372	690	2762				
44	2194	449	1797	90	3400	696	2785				
45	2220	454	1818	91	3426	701	2806				

## TROUBLESHOOTING



### 4-2-1. If the trouble is detected by self-diagnosis

#### 1) ICE Maker(FZ) Sensor has troubled

ERROR Code




– This refrigerator has Dual Ice Maker, so controlled two Ice Makers.

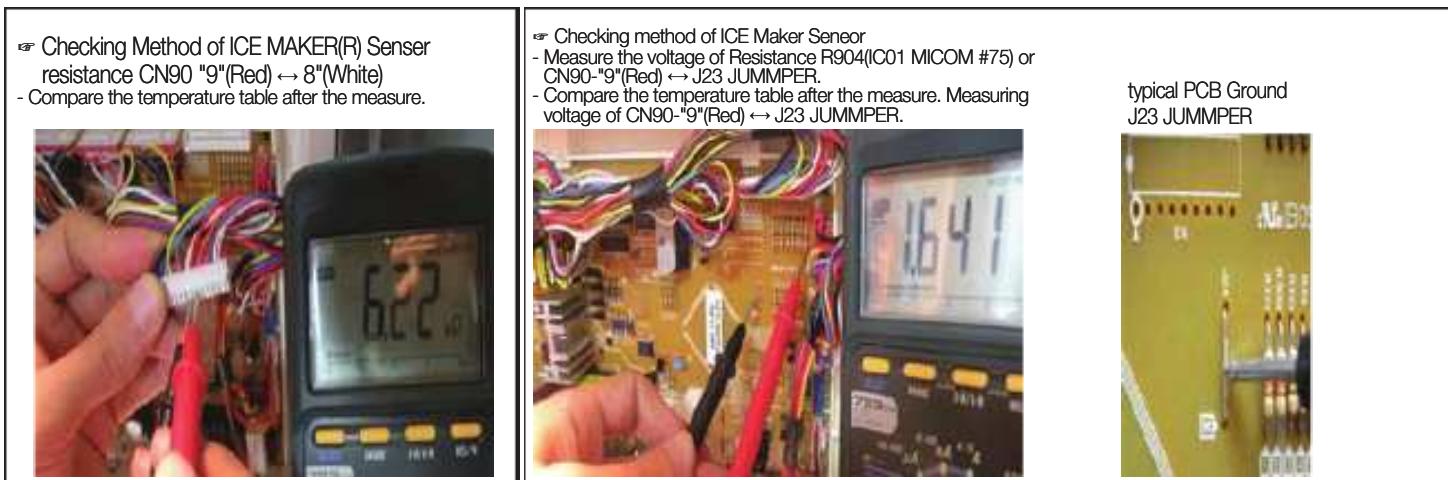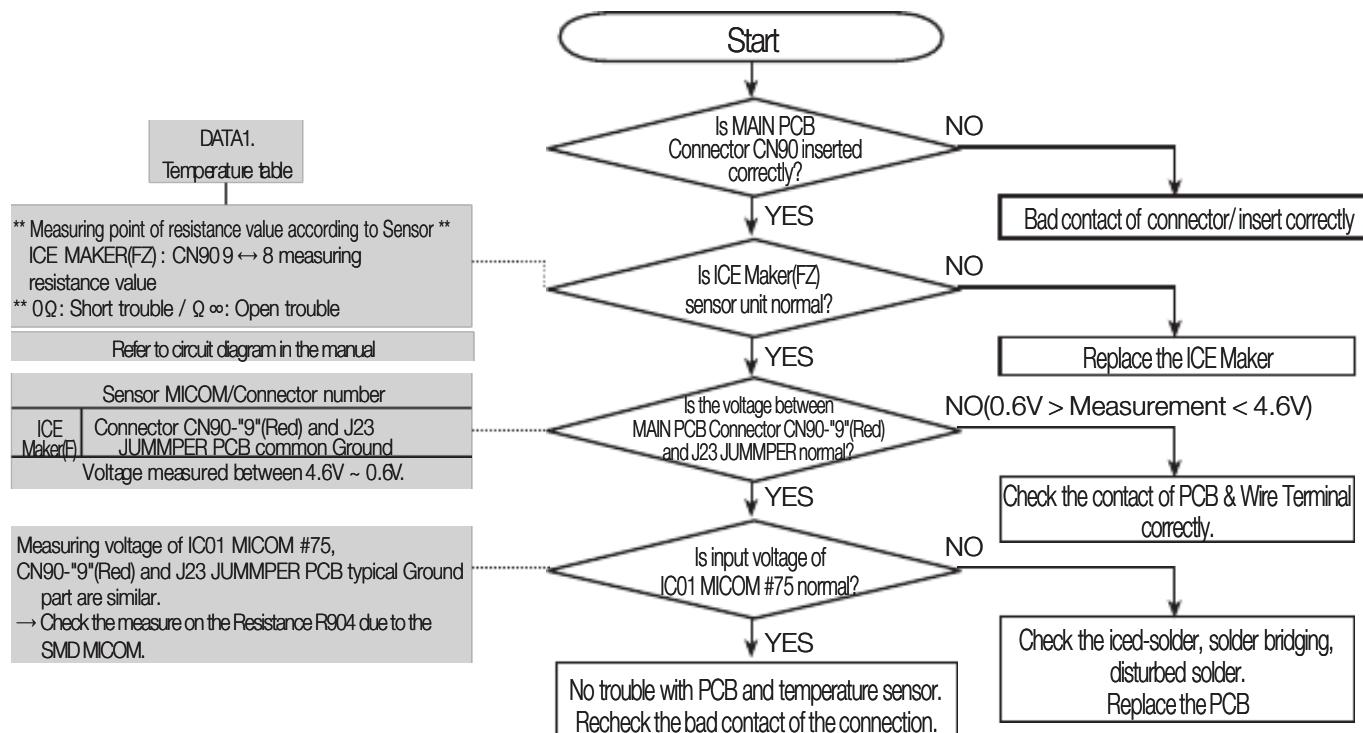

## TROUBLESHOOTING

### 2) If R Sensor has trouble

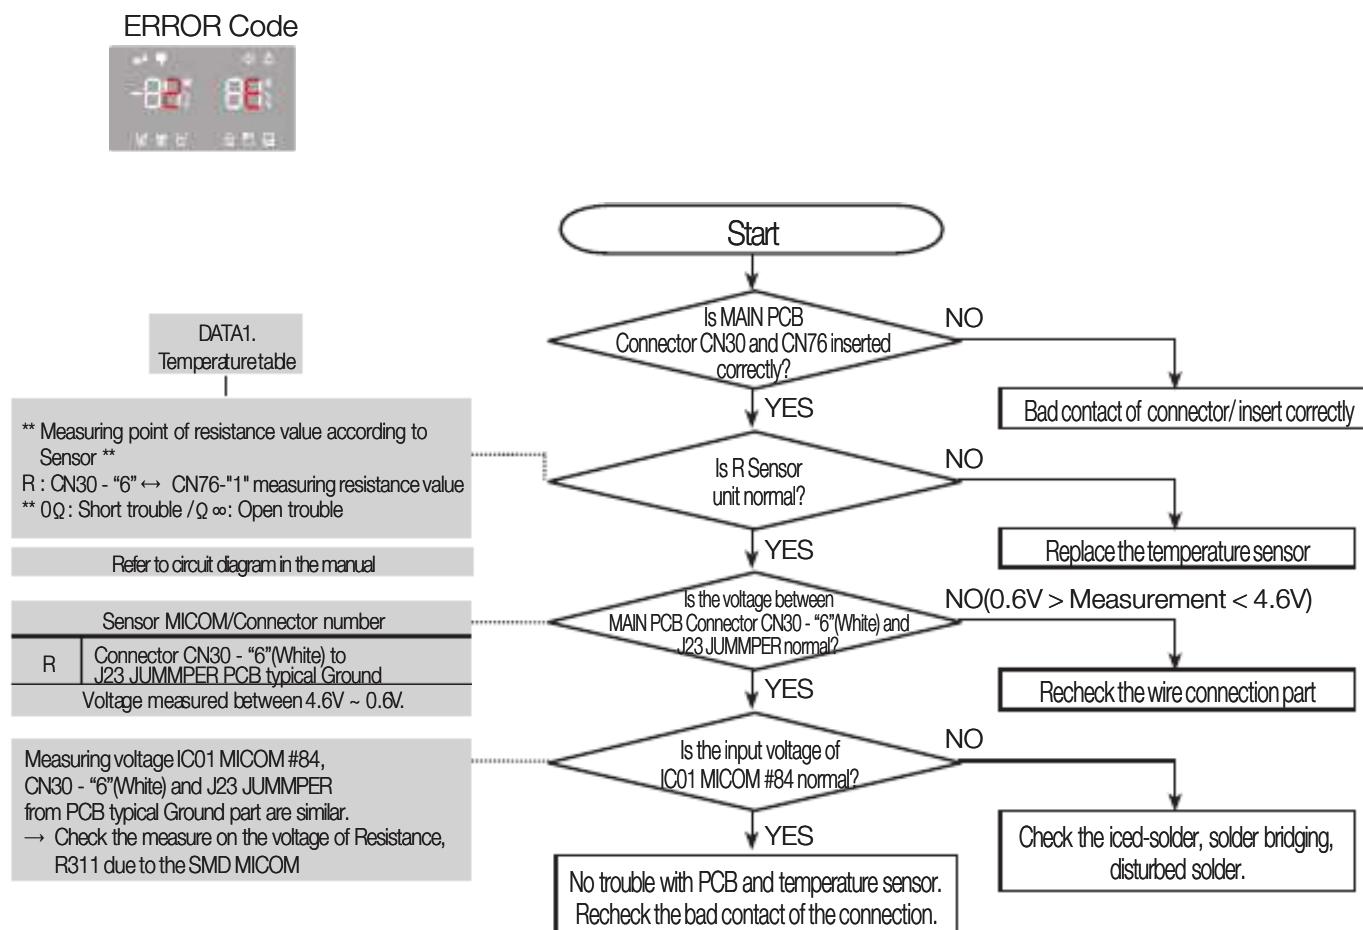


Checking method of R Sensor resistance  
CN30 - "6"(White) ↔ CN76 - "1"(Gray) Compare the temperature table after measurement.



Checking method of R Sensor resistance  
- Measure the voltage of Resistance R311(IC01 MICOM #84) on PCB or CN30 - "6"(White) ↔ J23 JUMPPER  
- Compare the temperature table after measurement.  
Measuring voltage of CN30 - "6"(White) ↔ J23 JUMPPER are as below.




PCB Typical Ground  
J23 JUMPPER

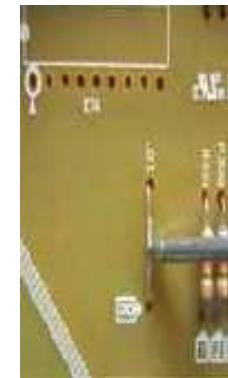

## TROUBLESHOOTING

### 3) If R DEF Sensor has trouble

#### ERROR Code

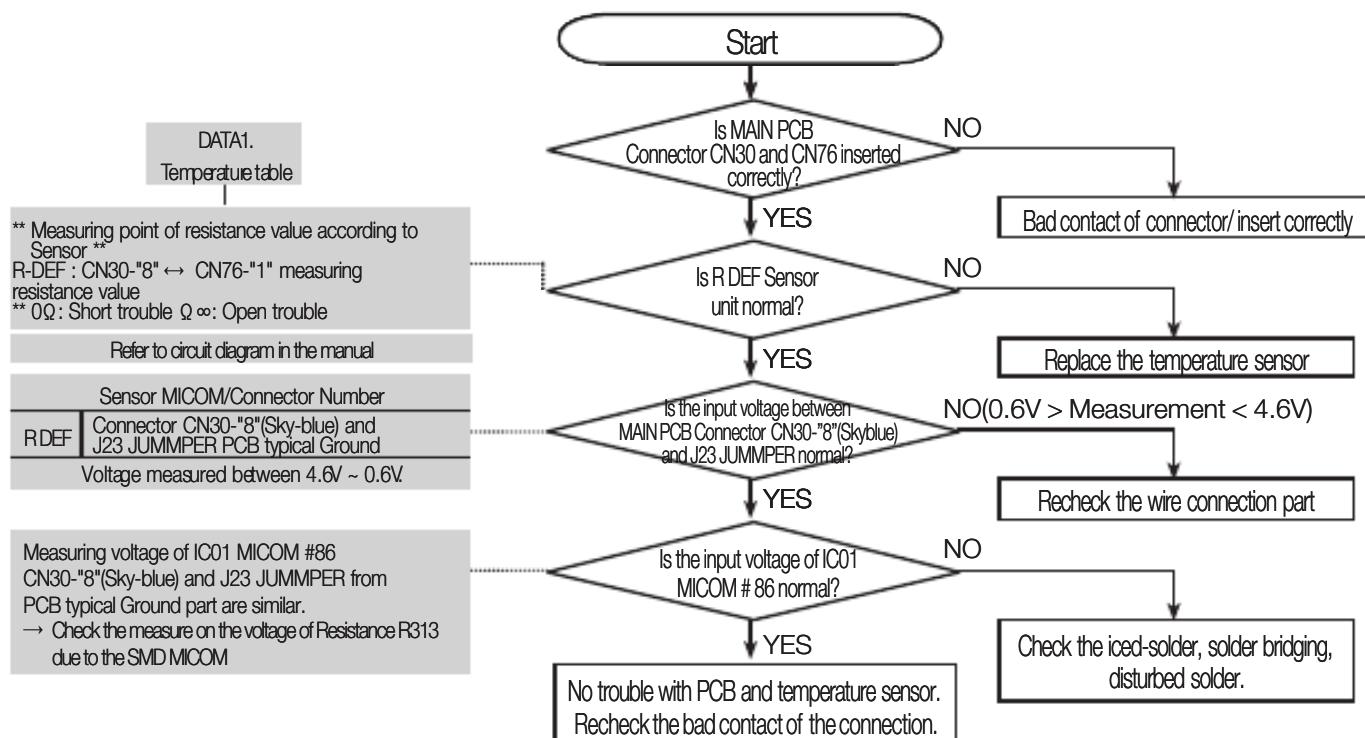


☞ Checking method of R Sensor resistance CN30-8"(Sky-blue) ↔ CN76-1"(Gray)  
- Compare the temperature table after measurement.



☞ Checking method of R DEF Sensor resistance  
- Measure the voltage of Resistance R313(IC01 MICOM #86) on PCB or CN30-8"(Sky-blue) ↔ J23 JUMPPER  
- Compare the temperature table after measurement.  
Measuring voltage of CN30-8"(Sky-blue) ↔ J23 JUMPPER are as below.






PCB Typical Ground  
J23 JUMPPER

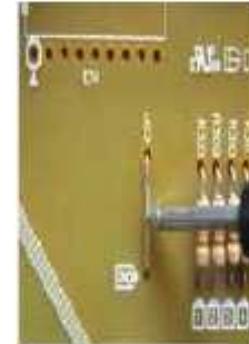

## TROUBLESHOOTING

### 4) If Ambient Sensor has trouble


ERROR Code

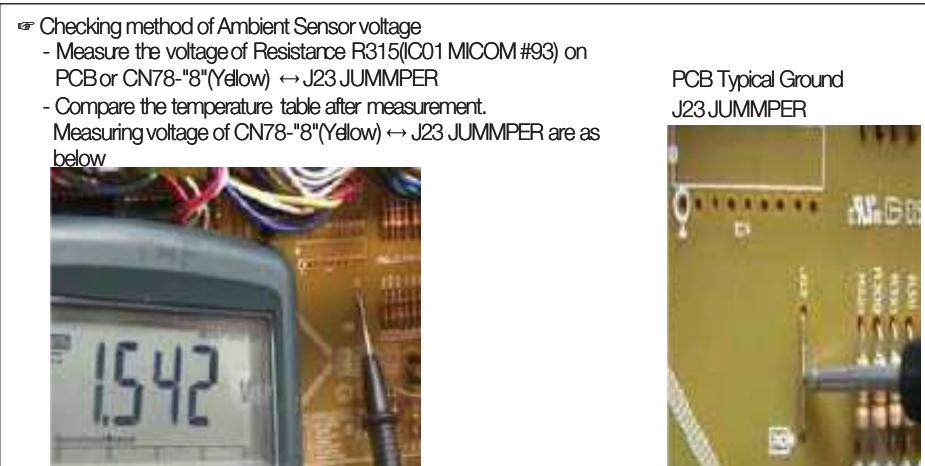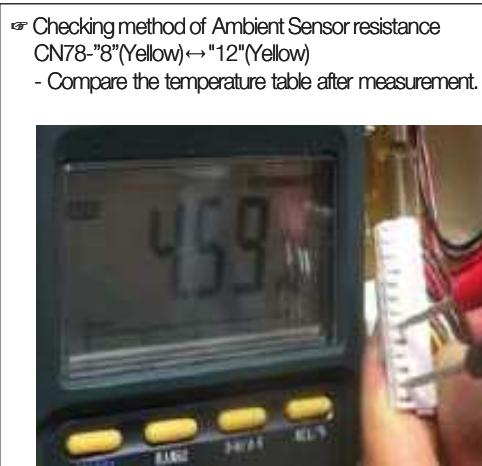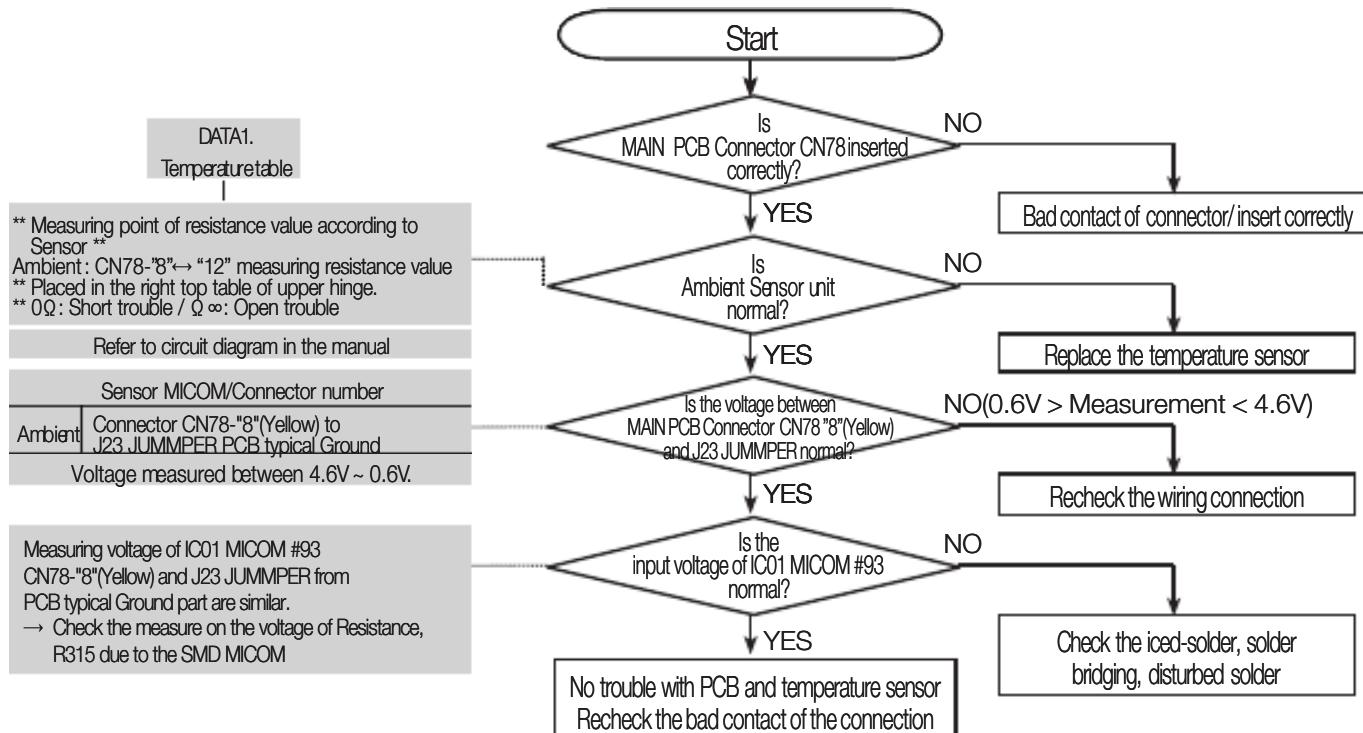

## TROUBLESHOOTING

### 5) If F Sensor has trouble

ERROR Code

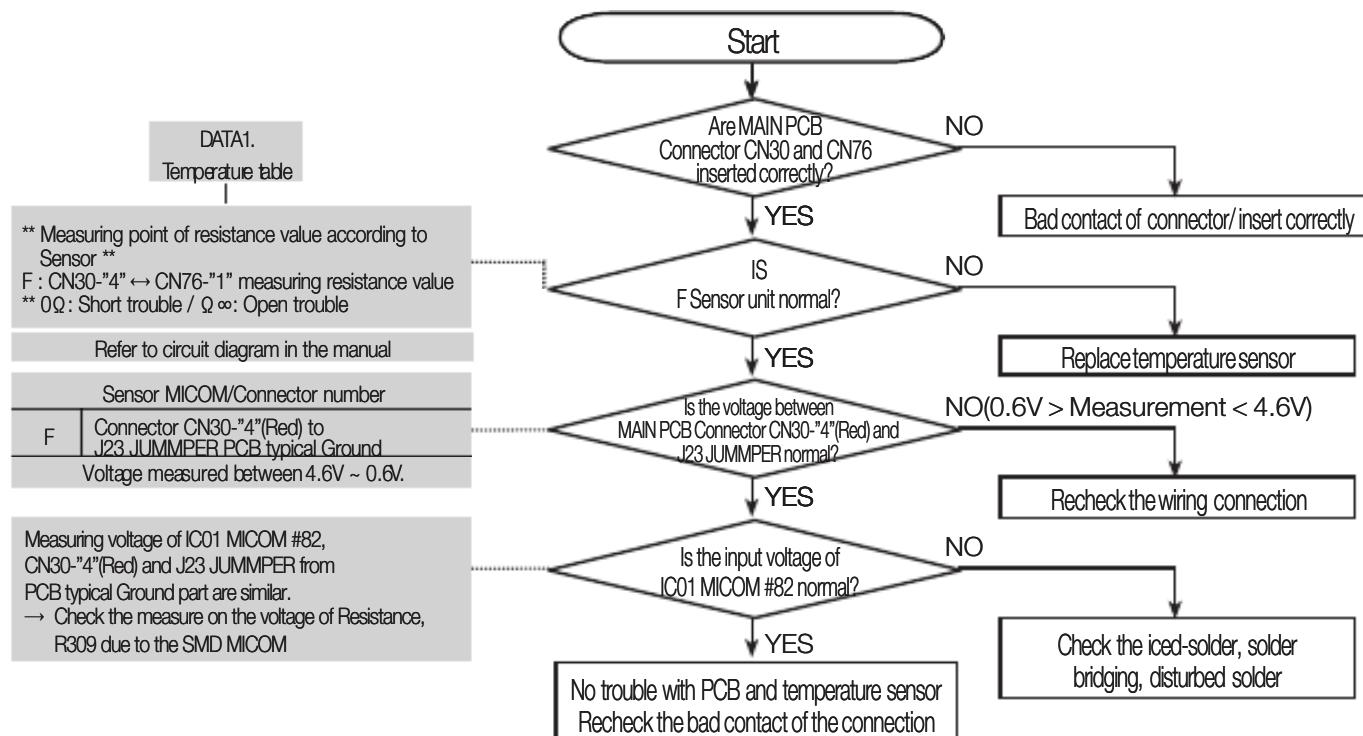


Checking method of F Sensor resistance CN30-“4”(Red) ↔ CN76-“1”(Gray)  
- Compare the temperature table after measurement.



Checking method of F Sensor voltage  
- Measure the voltage of Resistance, R309(IC01 MICOM #82) on PCB or CN30-“4”(Red) ↔ J23 JUMPPER  
- Compare the temperature table after measurement.  
Measuring voltage of CN30-“4”(Red) ↔ J23 JUMPPER are as below.




PCB Typical Ground  
J23 JUMPPER

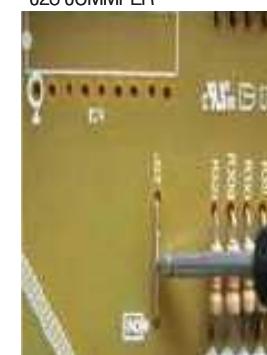

## TROUBLESHOOTING

### 6) If F DEF Sensor has trouble

ERROR Code

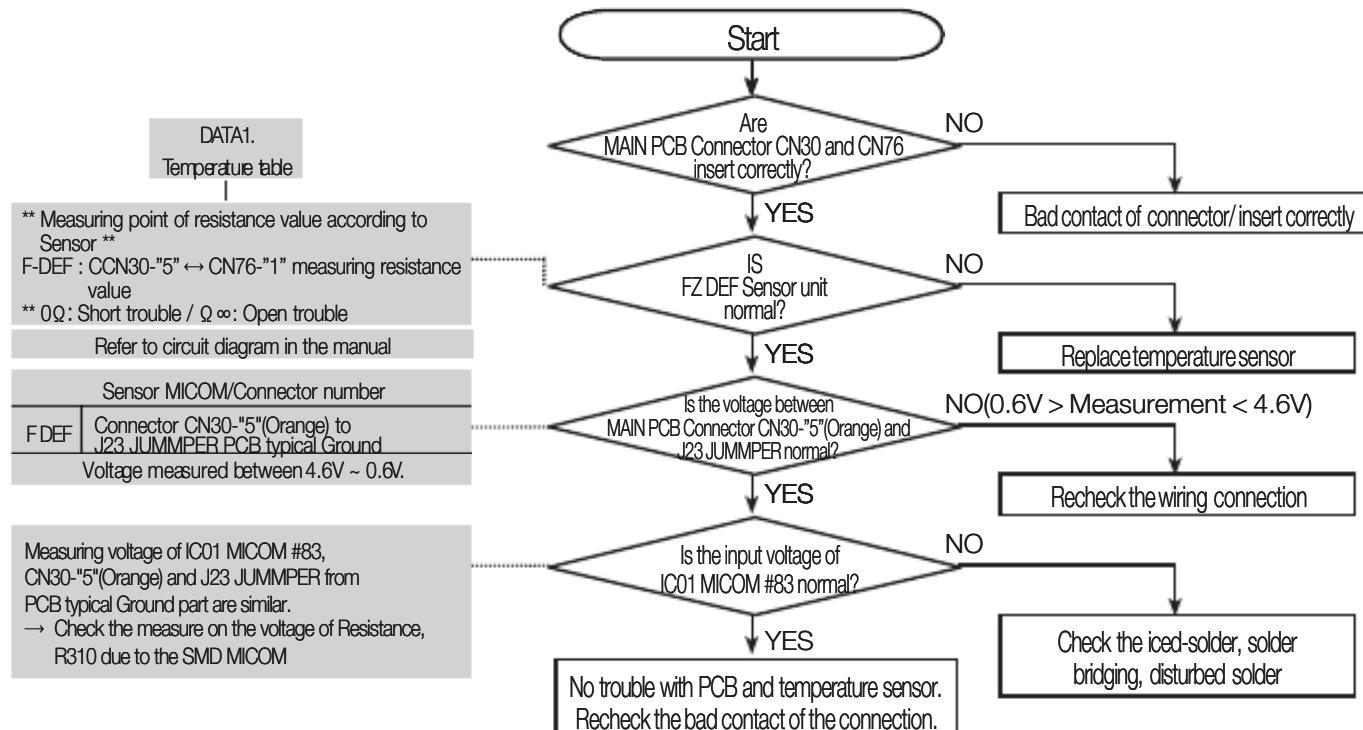

☞ Checking method of F DEF Sensor resistance  
CN30-5"(Orange) ↔ CN76-1"(Gray)  
- Compare the temperature table after measurement.



☞ Checking method of F DEF Sensor voltage  
- Measure the voltage of Resistance, R310(IC01 MICOM #83) on PCB or CN30-5"(Orange) ↔ J23 JUMPPER  
- Compare the temperature table after measurement.  
Measuring voltage of CN30-5"(Orange) ↔ J23 JUMPPER are as below





PCB Typical Ground  
J23 JUMPPER



## TROUBLESHOOTING

### 7) If PANTRY Sensor has trouble


ERROR Code

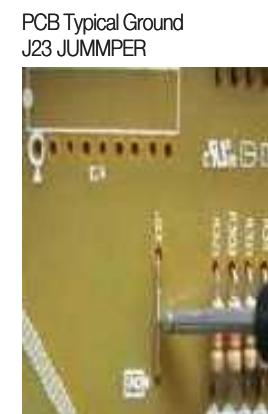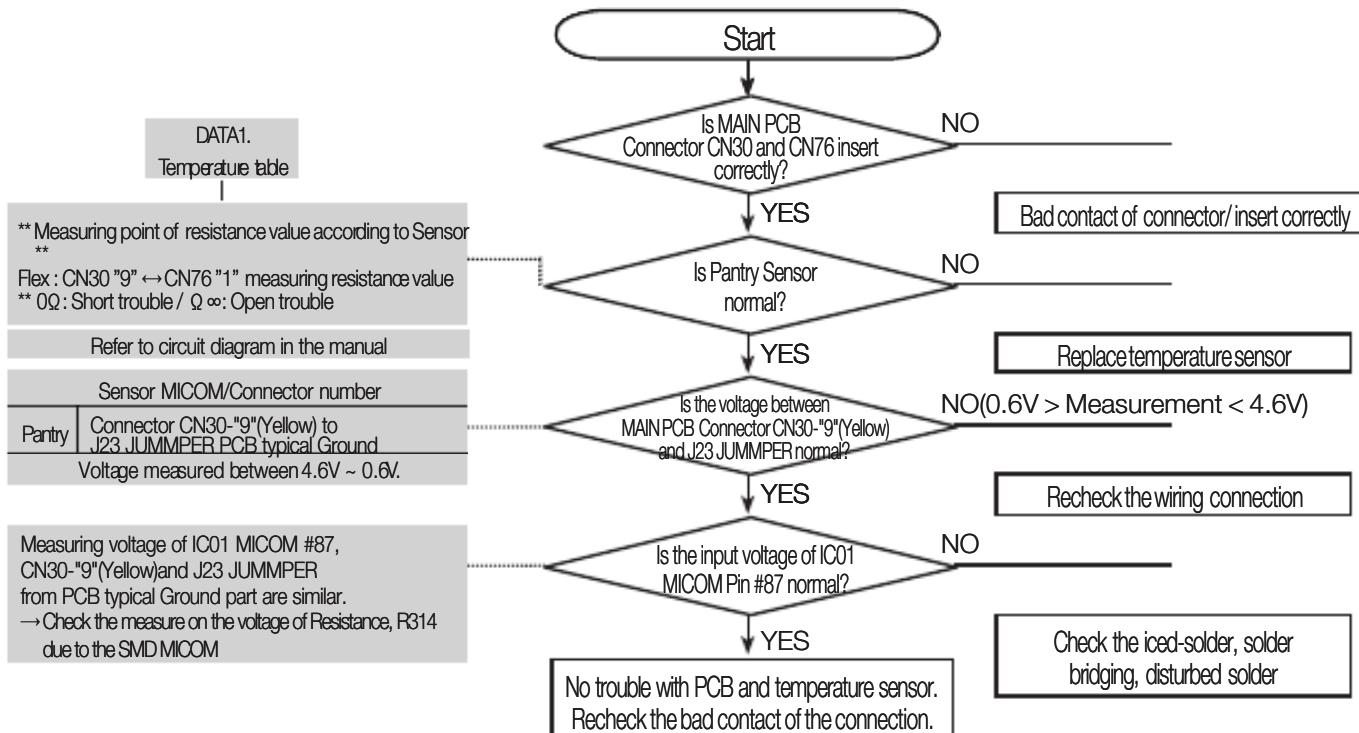

## TROUBLESHOOTING

### 8) If Humidity Sensor has trouble

ERROR Code

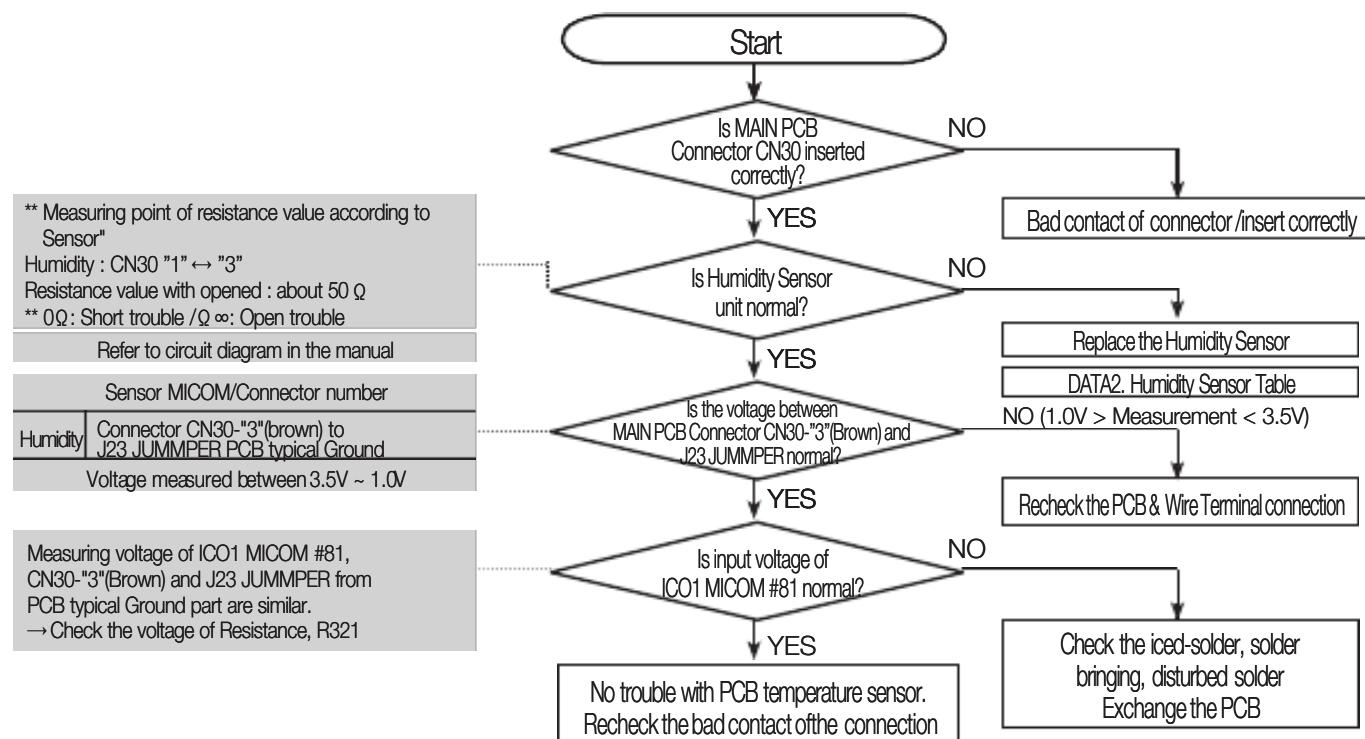

- Checking method of Humidity Sensor resistance CN30-3"(Brown) ↔ "1"(Gray)
- Compare the temperature table after the measure.



- Checking method of Humidity Sensor voltage.
  - Measure the voltage of Resistance, R321(ICO1 MICOM #81) on PCB or CN30-3"(Brown) ↔ J23 JUMPPER
  - Compare the temperature table after the measure.



PCB Typical Ground  
J23 JUMPPER



## TROUBLESHOOTING

### 9) PANTRY Room Damper Heater has trouble(OPTION)


ERROR Code



Measure the voltage of Resistance  
between ① - ② after  
CN77 connector open /  $1350\text{ ohm} \pm 7\%$

MICOM #56 condition	Initial power On	Heater off	Working heater
	3.5V ~ 4.8V	3.5V ~ 4.8V	0V


☞ Checking method of Flex Zone Room Damper  
resistance CN77- "1"(Black)↔"2"(Brown)  
\*\*  $\Omega \infty$ : Open (wire disconnection,  
heater disconnection) trouble /  $0\Omega$ : Short trouble

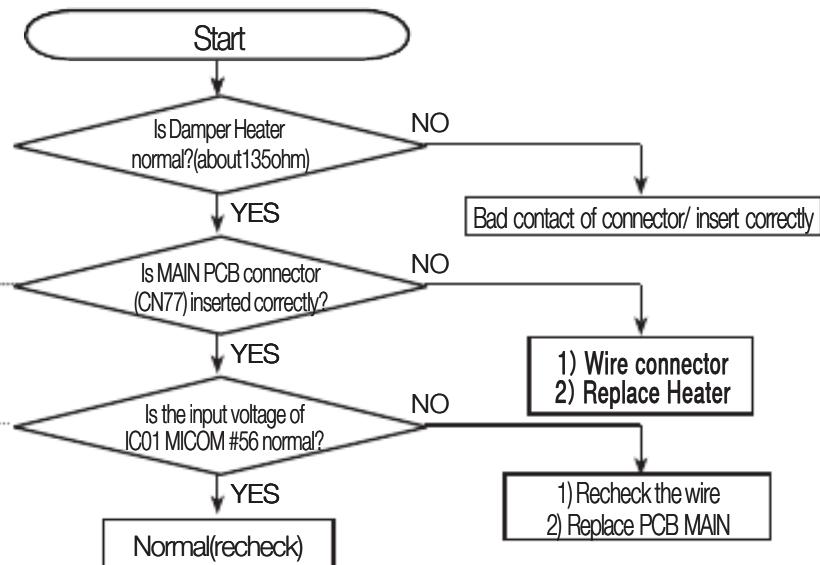

## TROUBLESHOOTING

### 4-2-2. If FAN does not operate


- The refrigerator of this model has BLDC FAN motor. BLDC motor is driven by DC 7~12V.
- On the normal condition of COMP ON, it operates together with F-FAN motor.
- If door is opened and closed once at a high ambient temperature, it will be operated after 1 minute delay.
- Therefore, you are advised not to take it for an error.
- If there is a trouble, you should select the self-diagnostic function to check the trouble before power off.

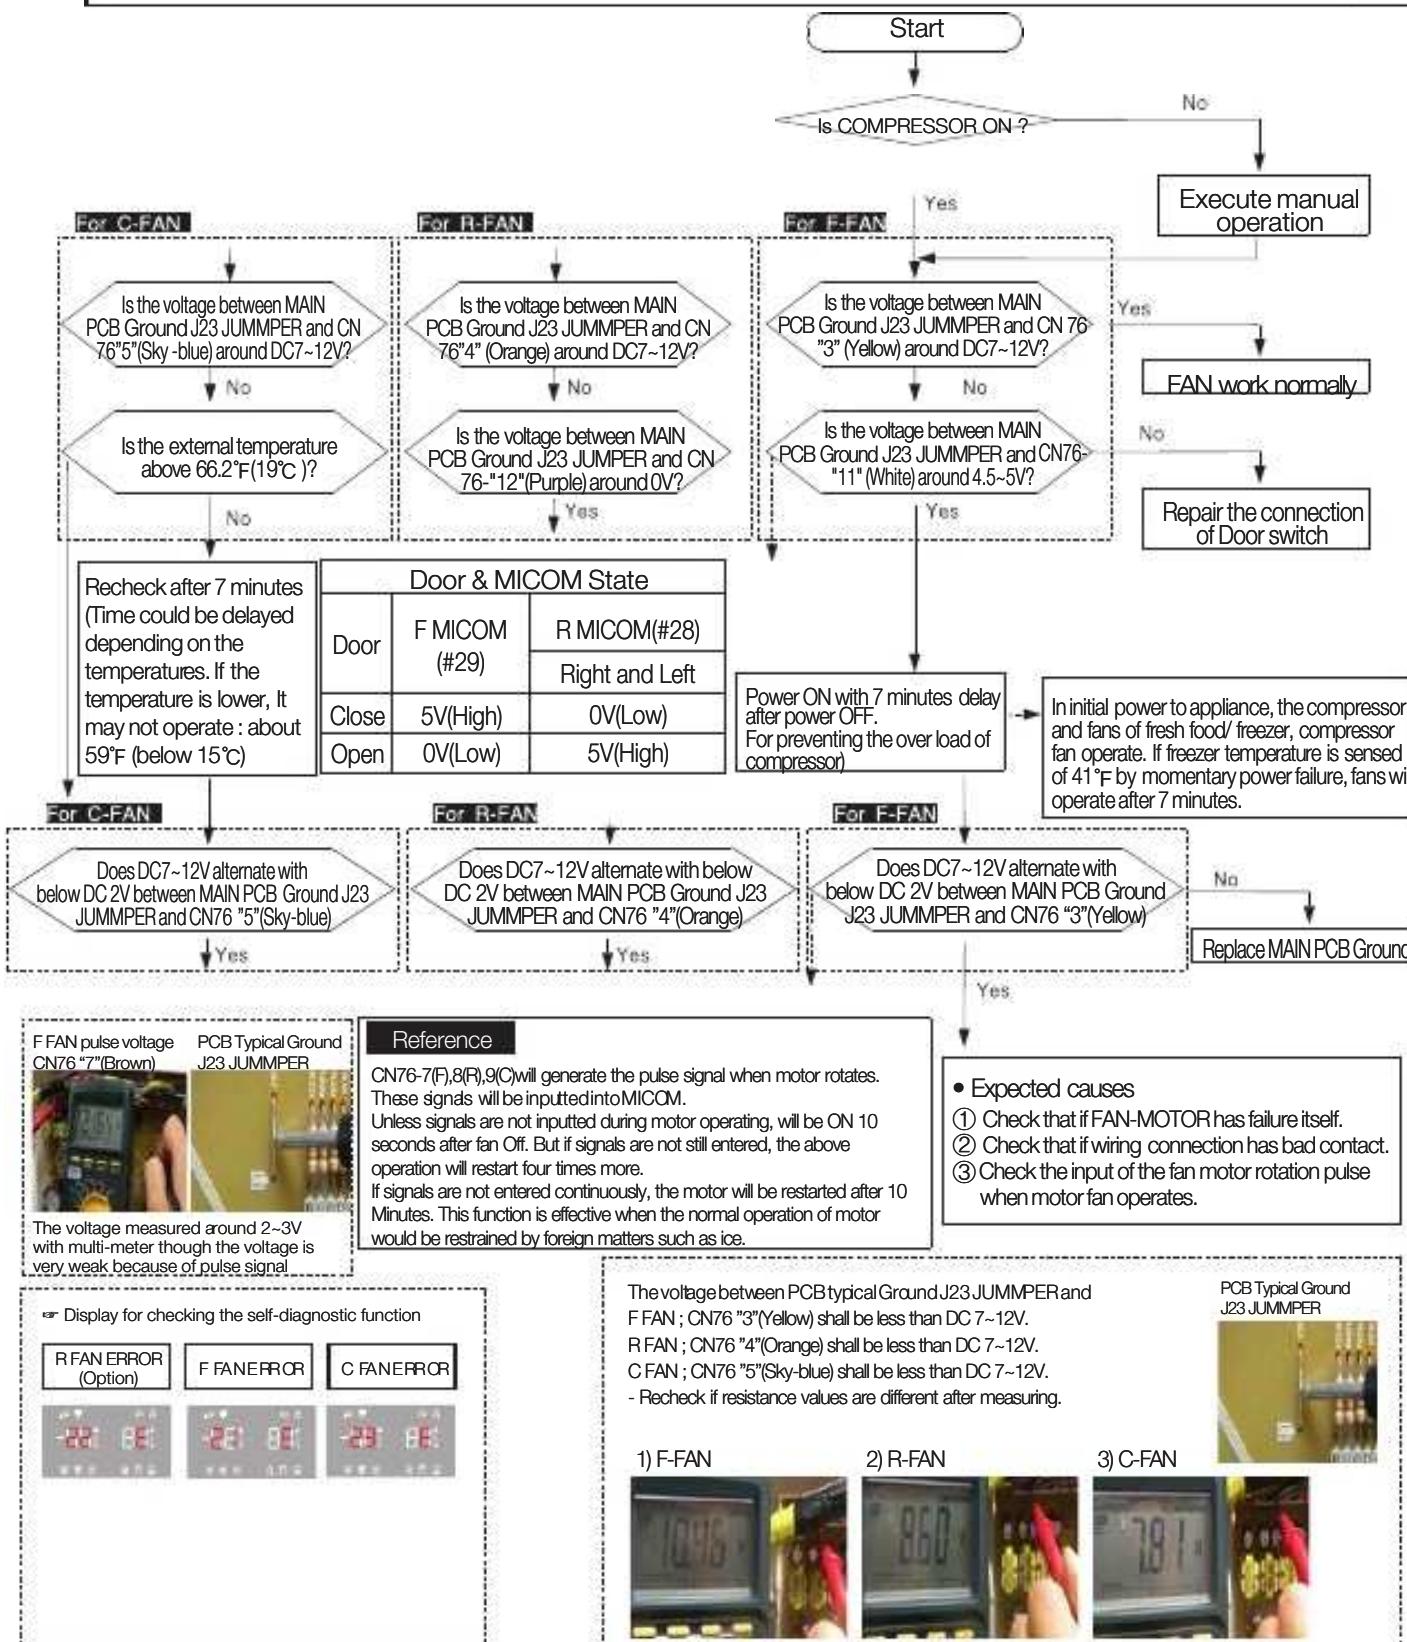

## TROUBLESHOOTING


### 4-2-3. When ICE MAKER(FZ) does not operate

1. Water will be automatically supplied to the Ice Maker depending on temperature & time conditions, and ice will be produced to dispense.
2. Power is applied to one end of the wires. So, make sure to refer to its Exploded View whenever doing the disassembly.
3. The operation of the Ice Maker shall be done after pressing the Ice Maker Test Button. (Freezer Ice Maker) It is not possible to check when the power is off.
4. Since both of the PCB and the Ice Maker are located at the front and the back each other, make sure to have two people check them.

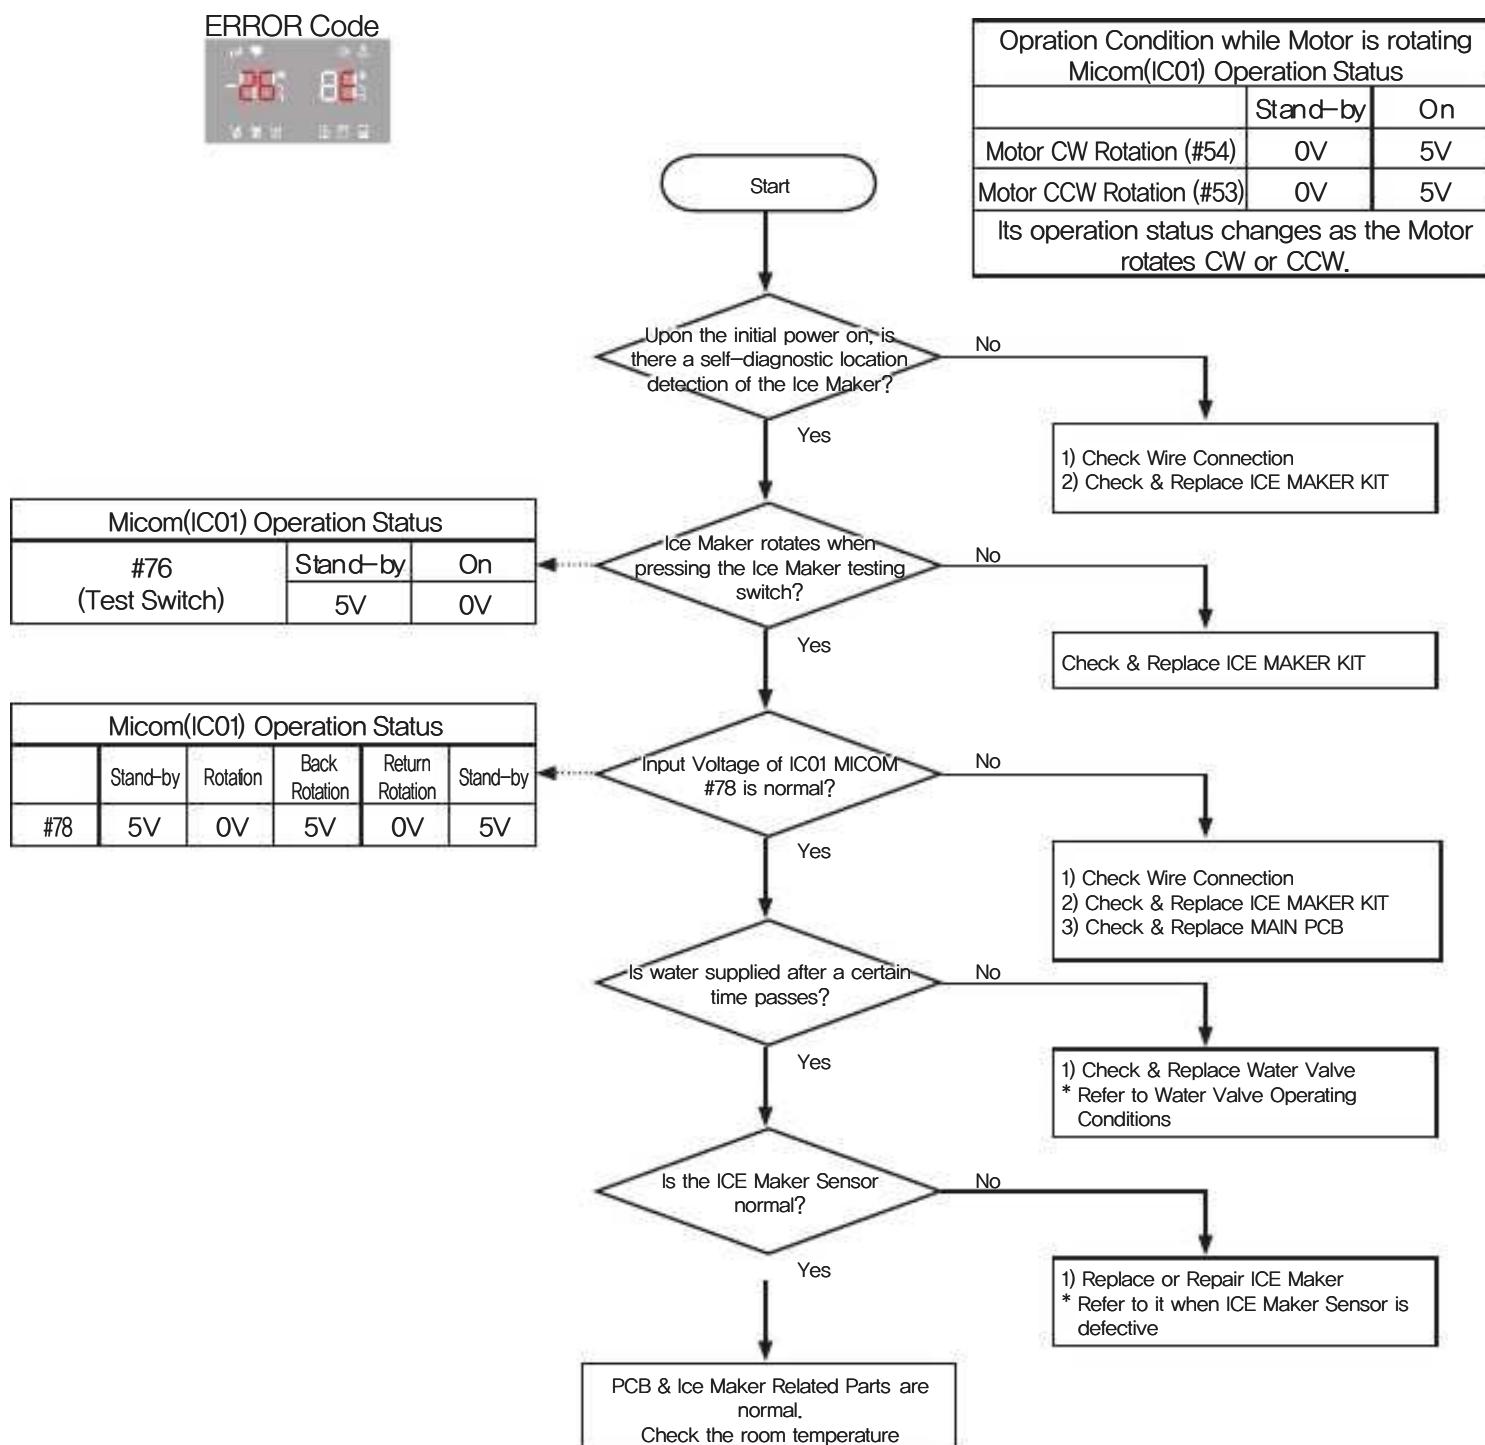


## TROUBLESHOOTING

### 4-2-4. If defrost does not operate (F,R DEF Heater)

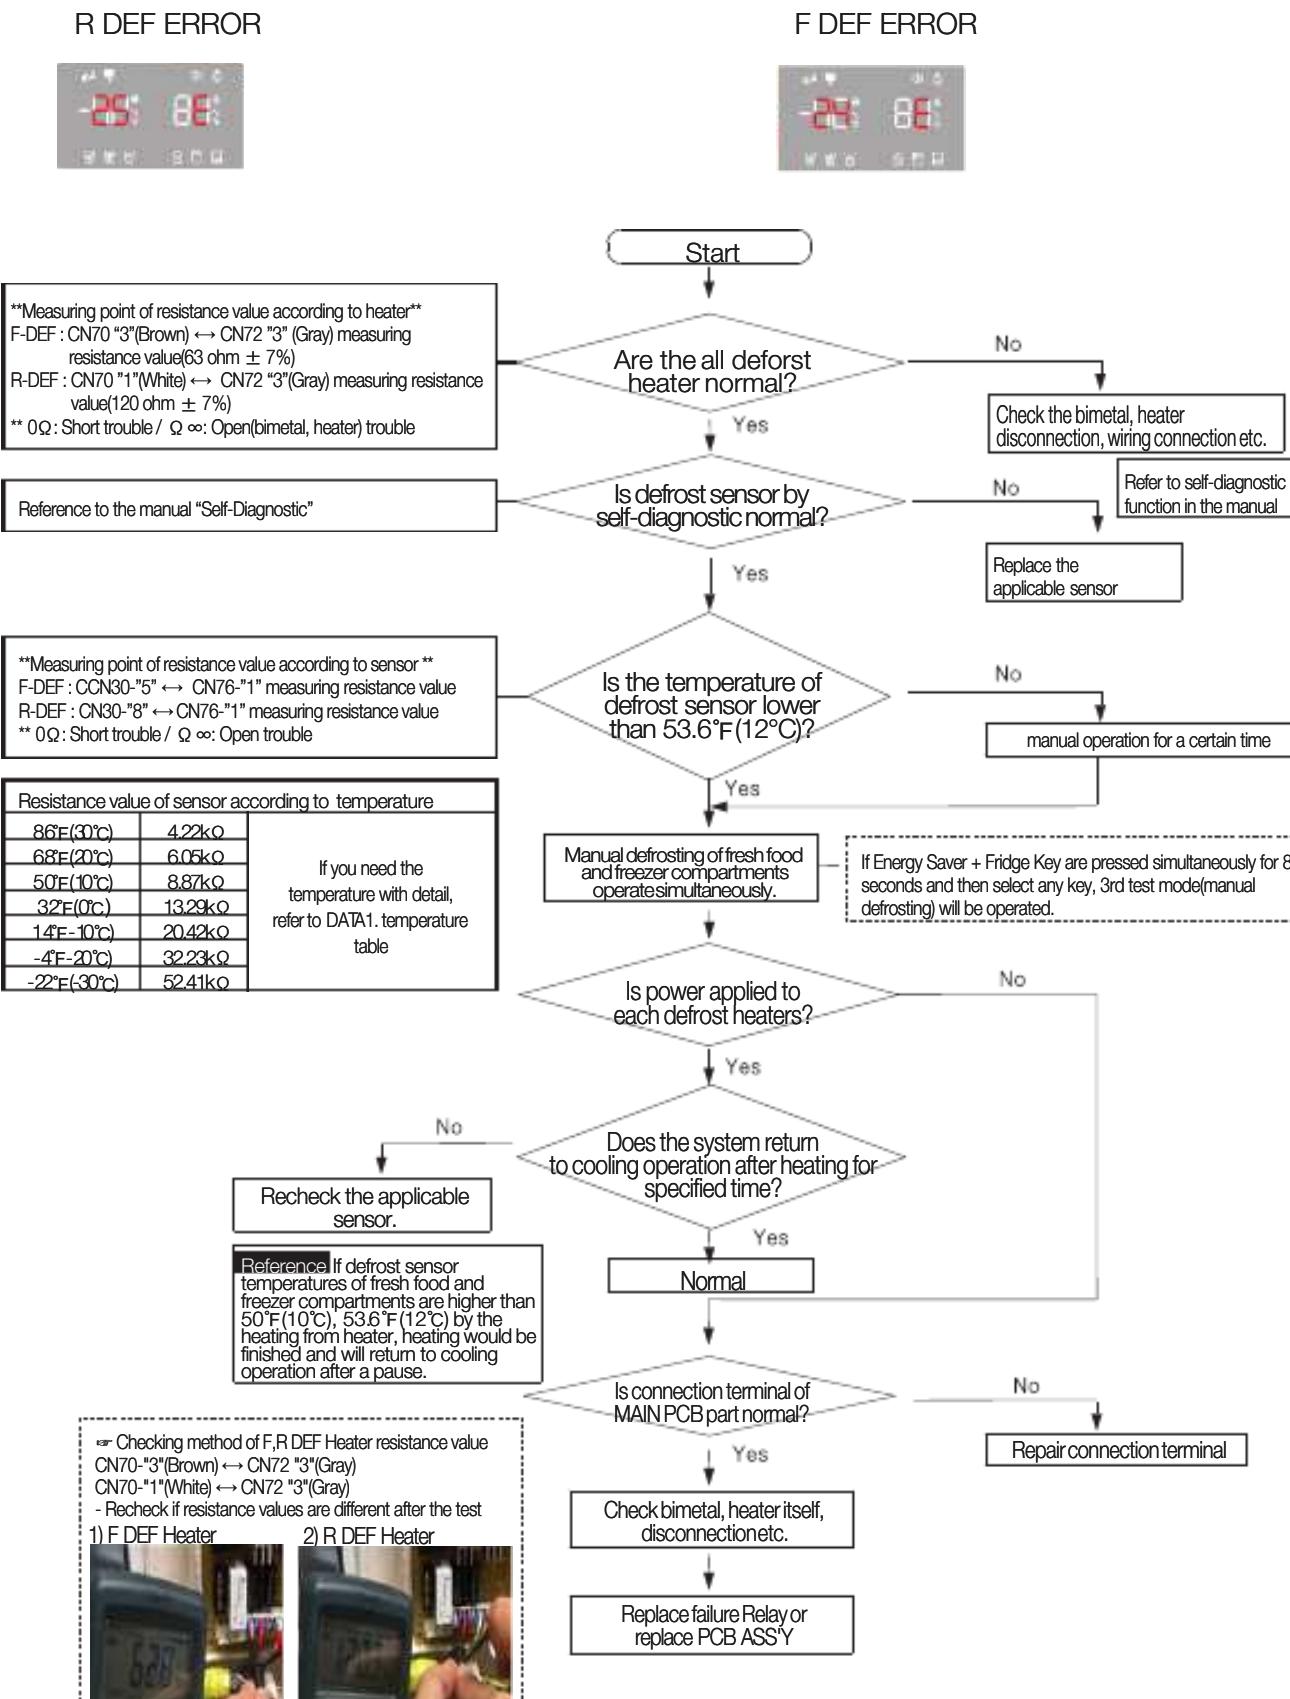


## TROUBLESHOOTING

### 4-2-5. When Power is not applied

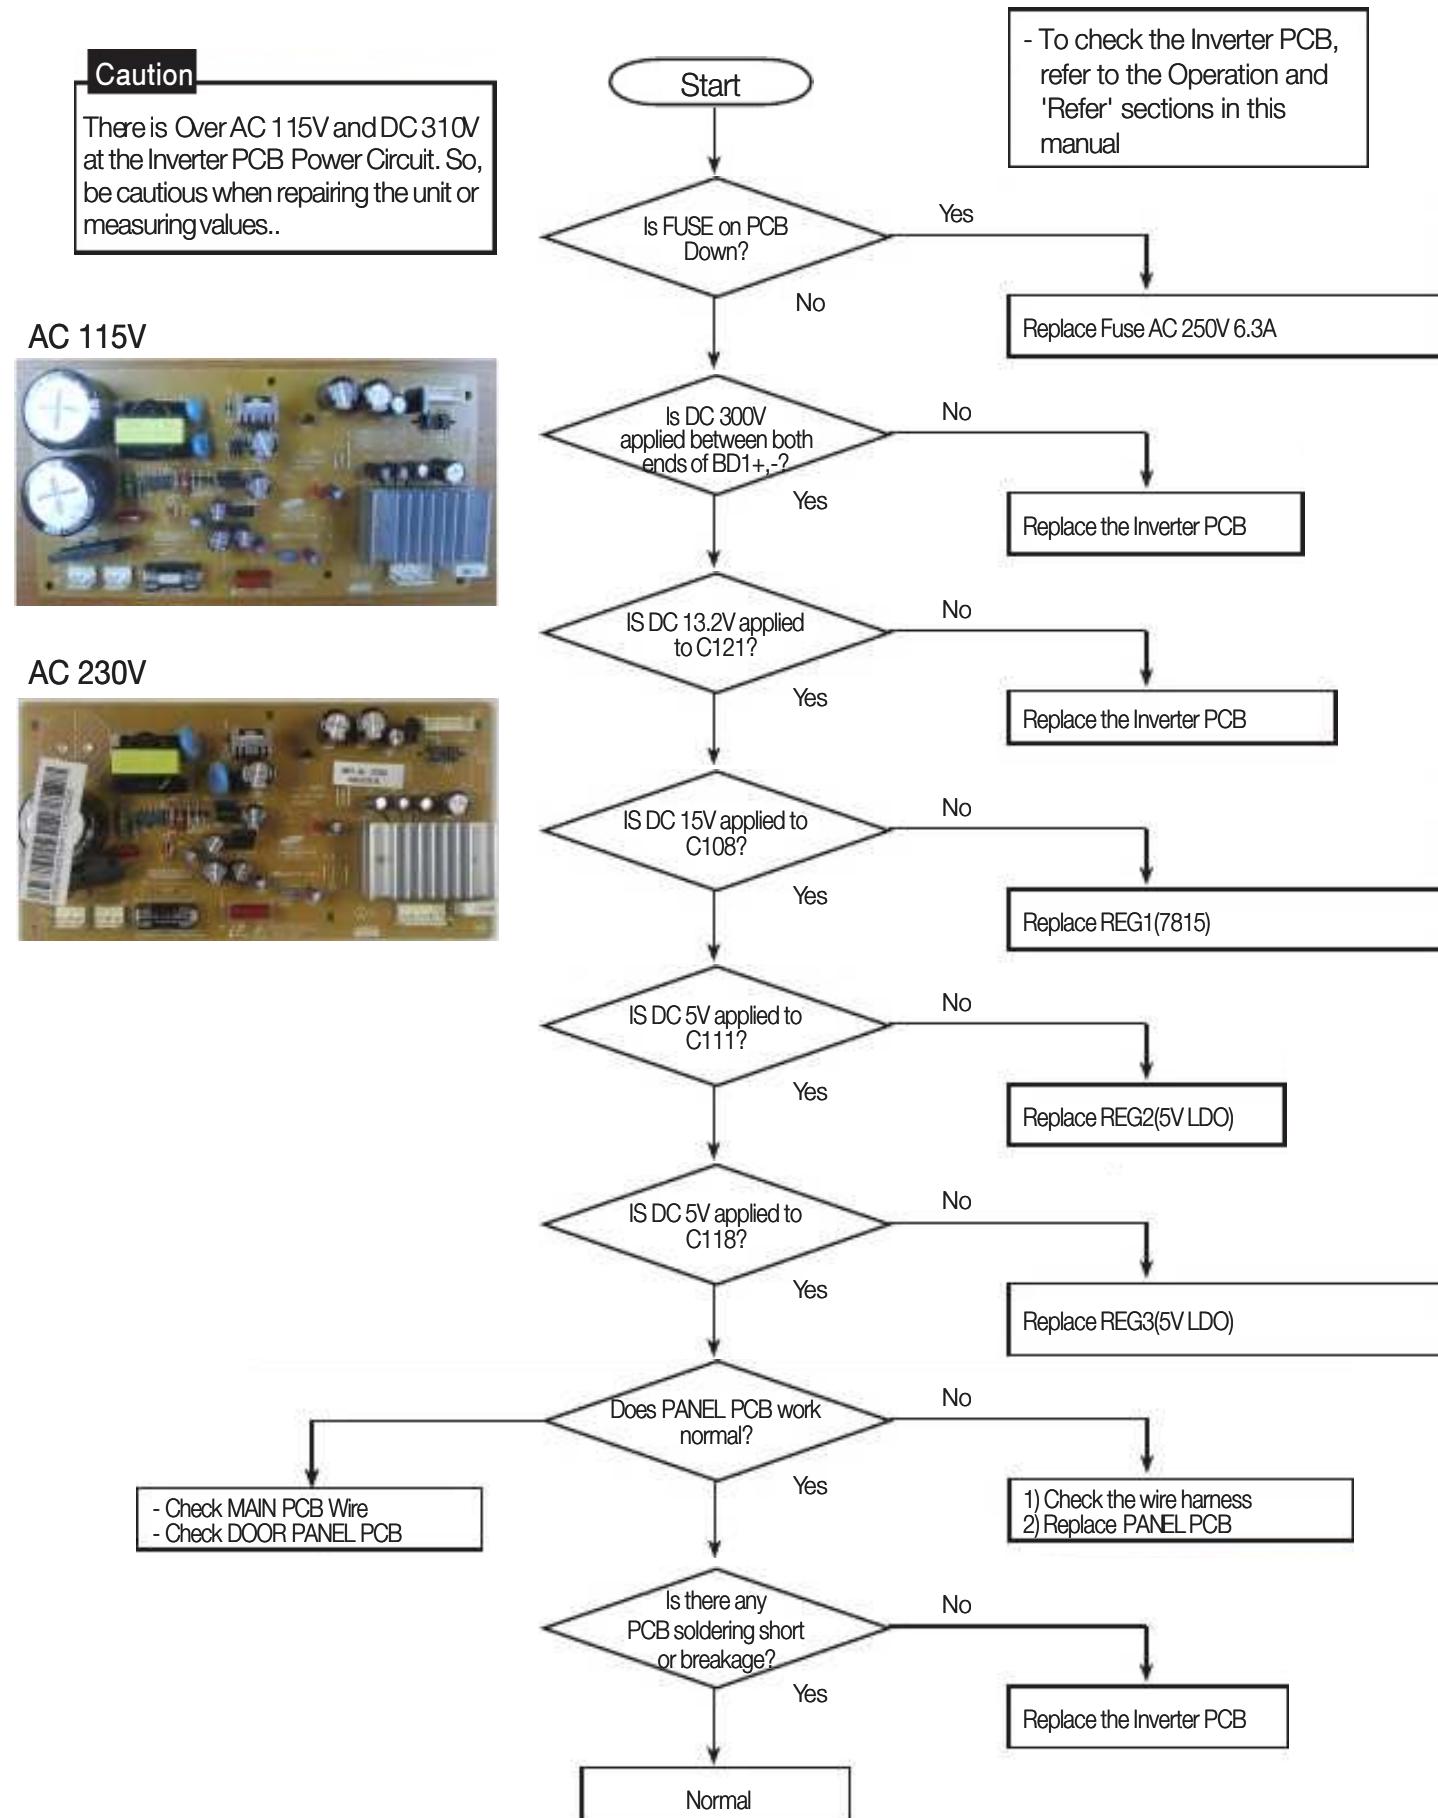

## TROUBLESHOOTING


### 4-2-6. When Compressor does not run (Inverter COMP.)

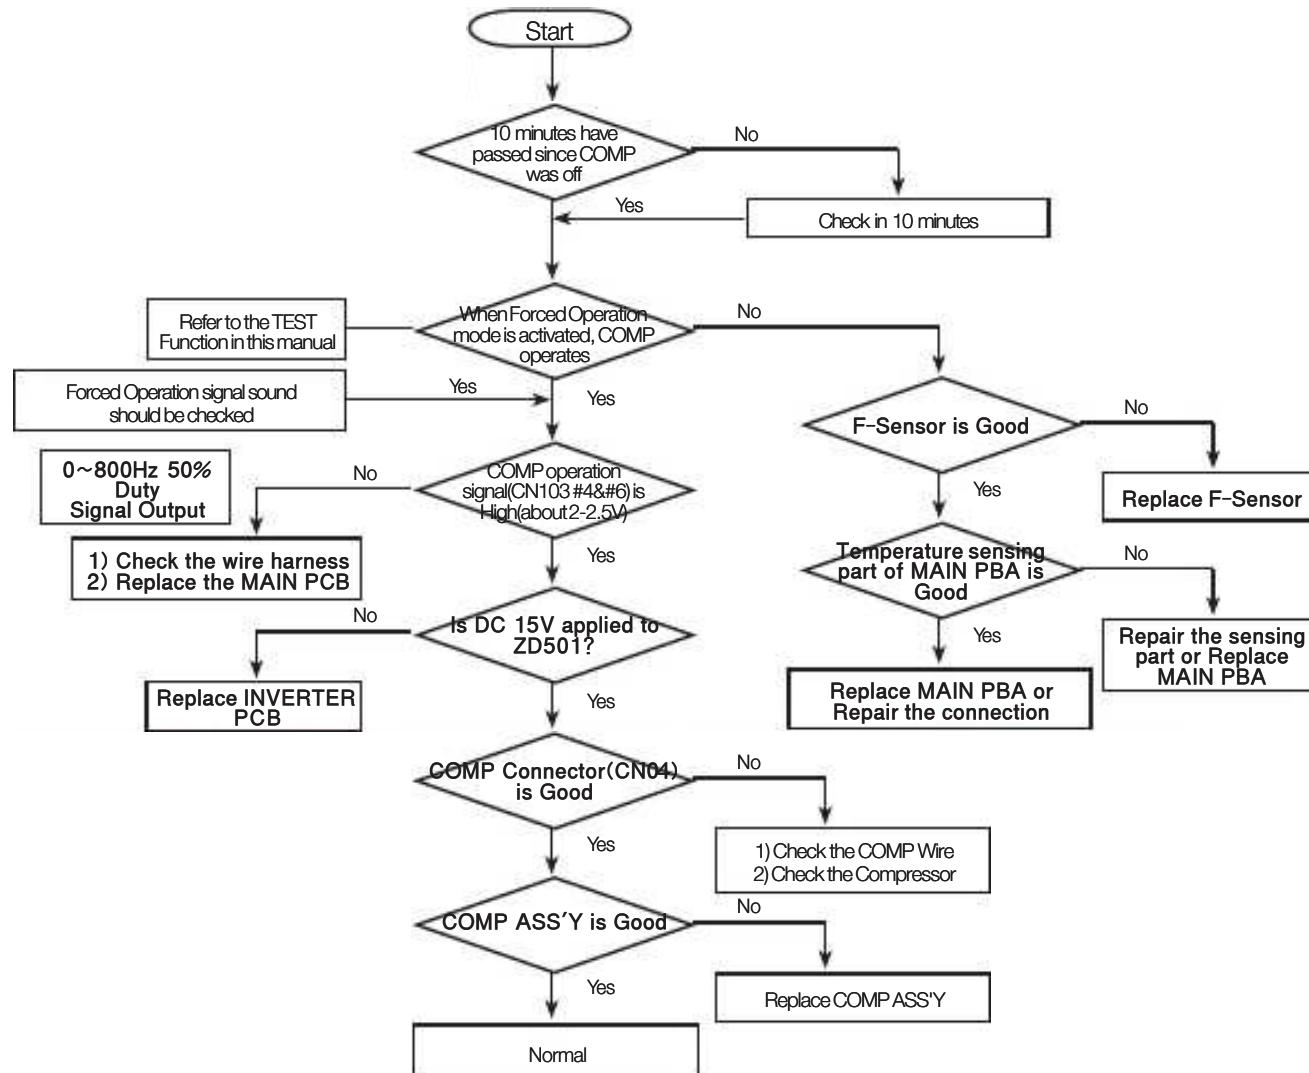


## TROUBLESHOOTING

### 4-2-7. When alarm sounds continuously without stop(related with buzzer sound)

① If 'ding-dong' sound continuously

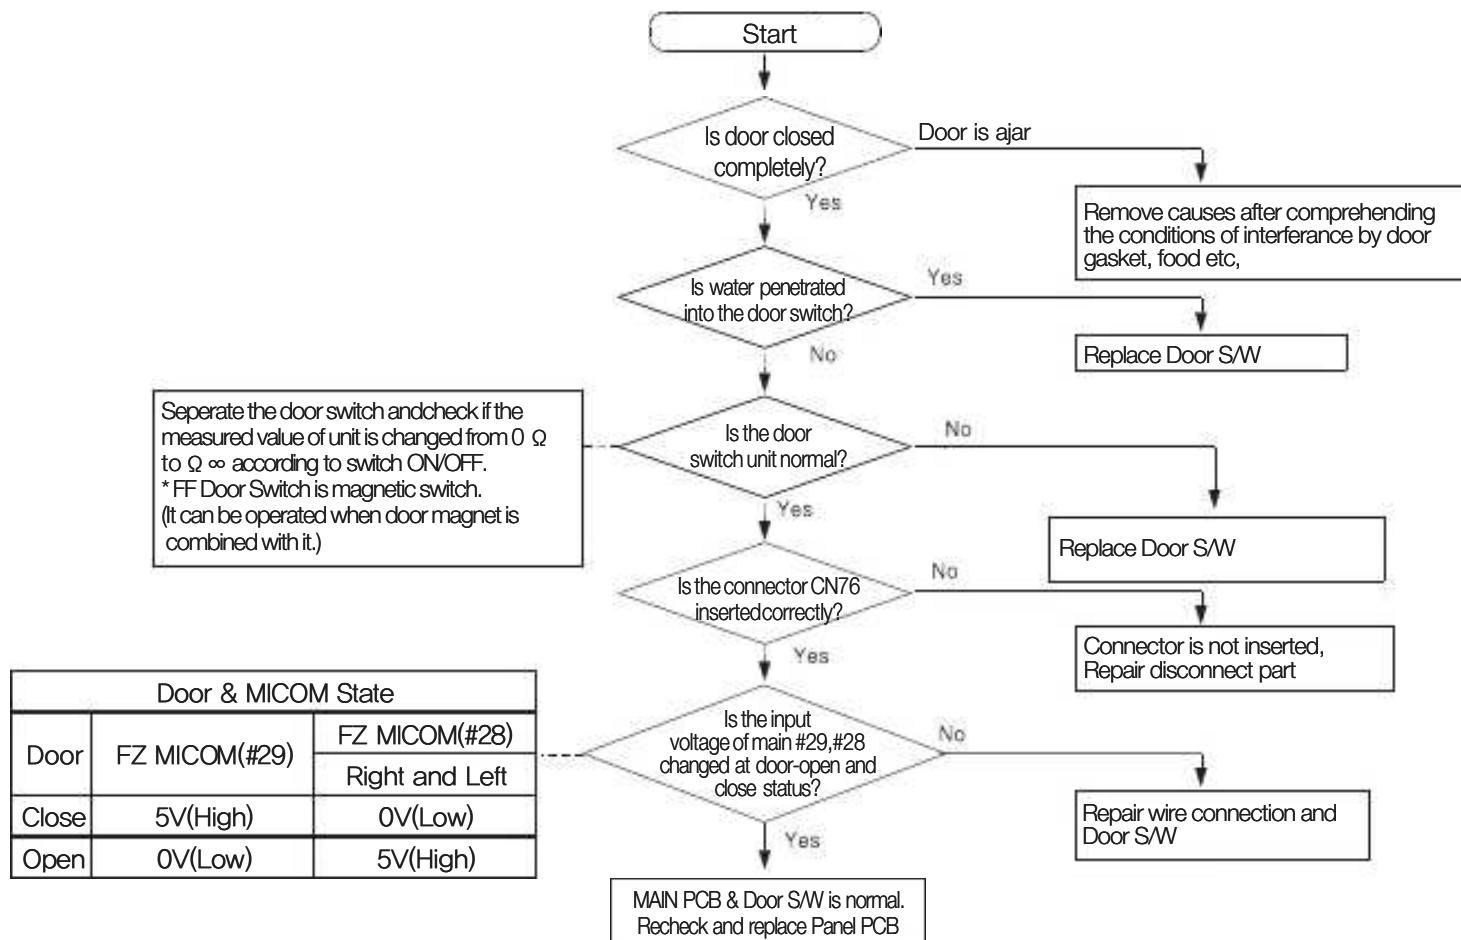


② If 'beep-beep' sounds continuously

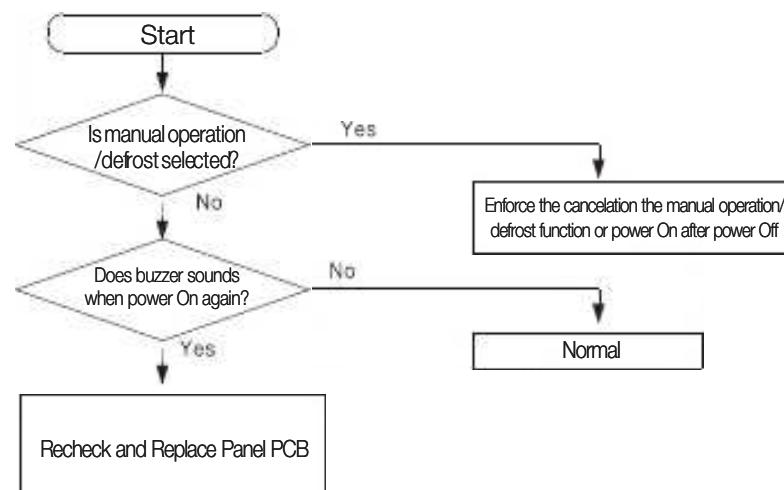

## TROUBLESHOOTING

### ③ If buzzer does not sound

Buzzer is installed on the panel PCB in this model.  
If buzzer does not sound even though the button is pressed, manual operation is started and door is opened, it should separate panel PCB and check the breakage of buzzer and bad soldering.  
It is very hard to repair the panel PCB because it consists of SMD assemblies.  
It is recommended to replace PCB assembly when the failure associated with panel is occurred except the minor error such as switch pressing error, surface peeling off and so on.

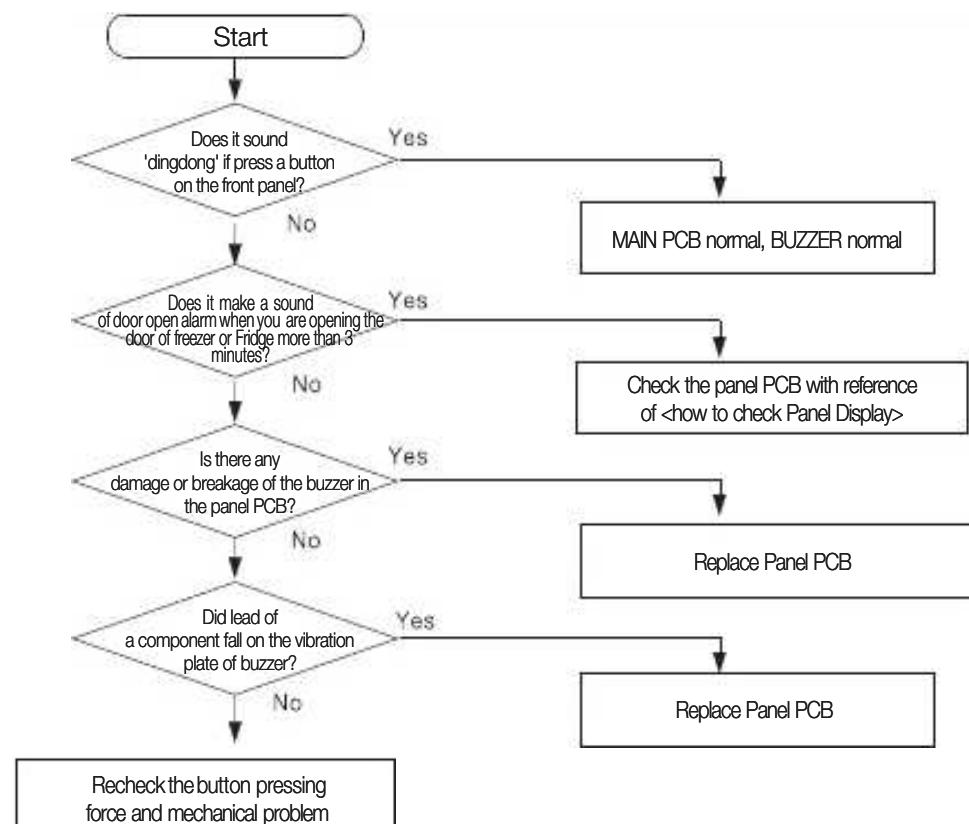


## TROUBLESHOOTING

### 4-2-8. When the Panel PCB does not operate normally


#### ① When the entire or a certain section of the Panel PCB does not light up

- There is a MICOM embedded in the Panel PCB. So, take care when doing repairs. And, except the Solder Touch, replace the PCB.

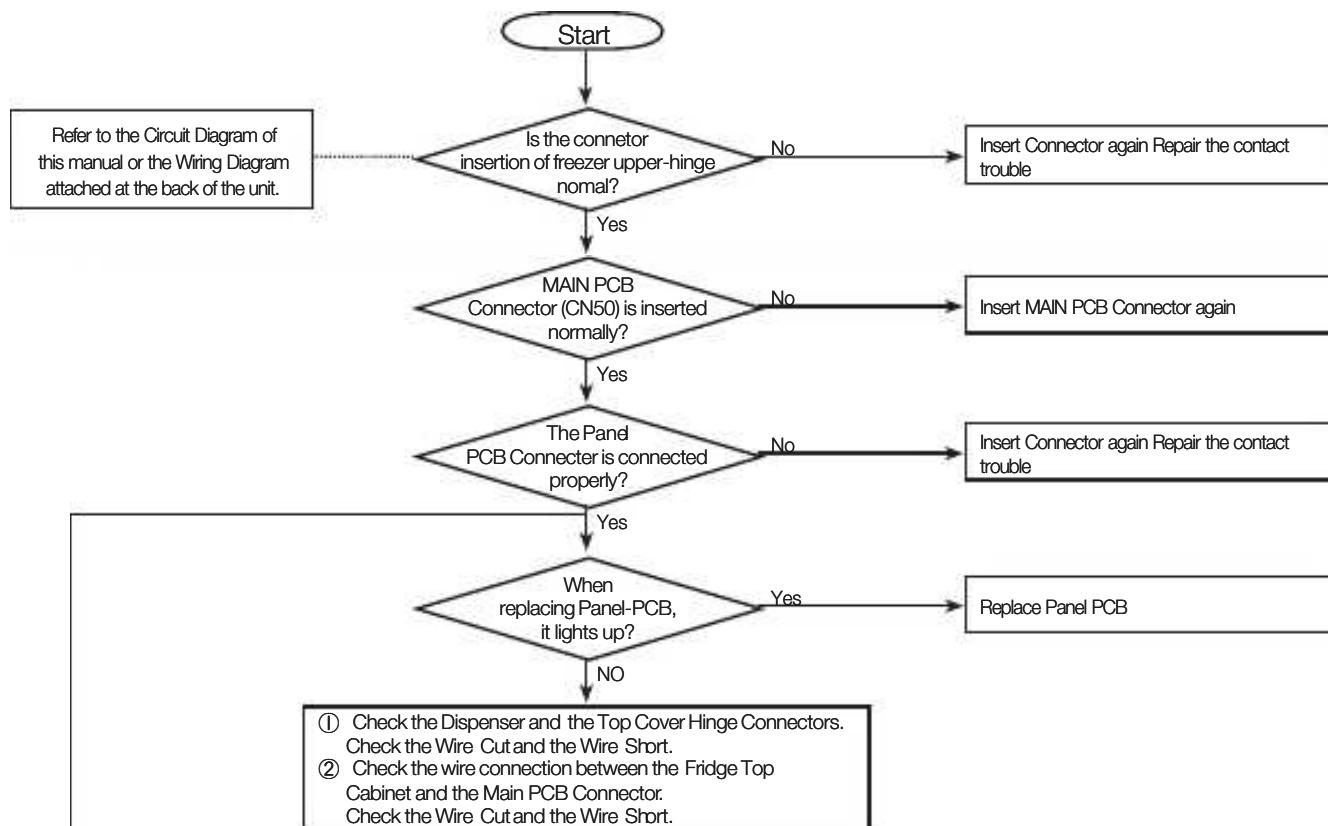

#### ② When the Panel PCB buttons do not work

※ When it keeps troubling after check with the above procedures  
[Check after turning off the unit and turning it on again]

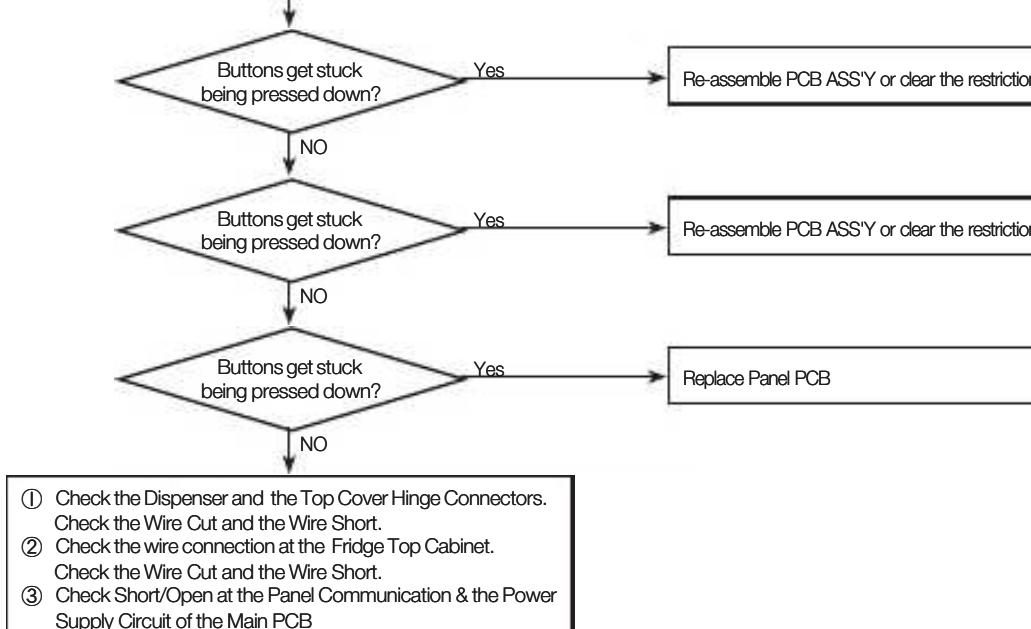


Since all Touch is used for the Panel PCB Switch, be sure to turn off the unit and turn it on again after doing a repair. [It is to adjust the sensitivity of the Touch Panel.]

## TROUBLESHOOTING


### 4-2-9. If Pantry Panel PCB is not working normally

You should check the display after door opening because the display of this model operates only when the fresh food compartment door is opened.

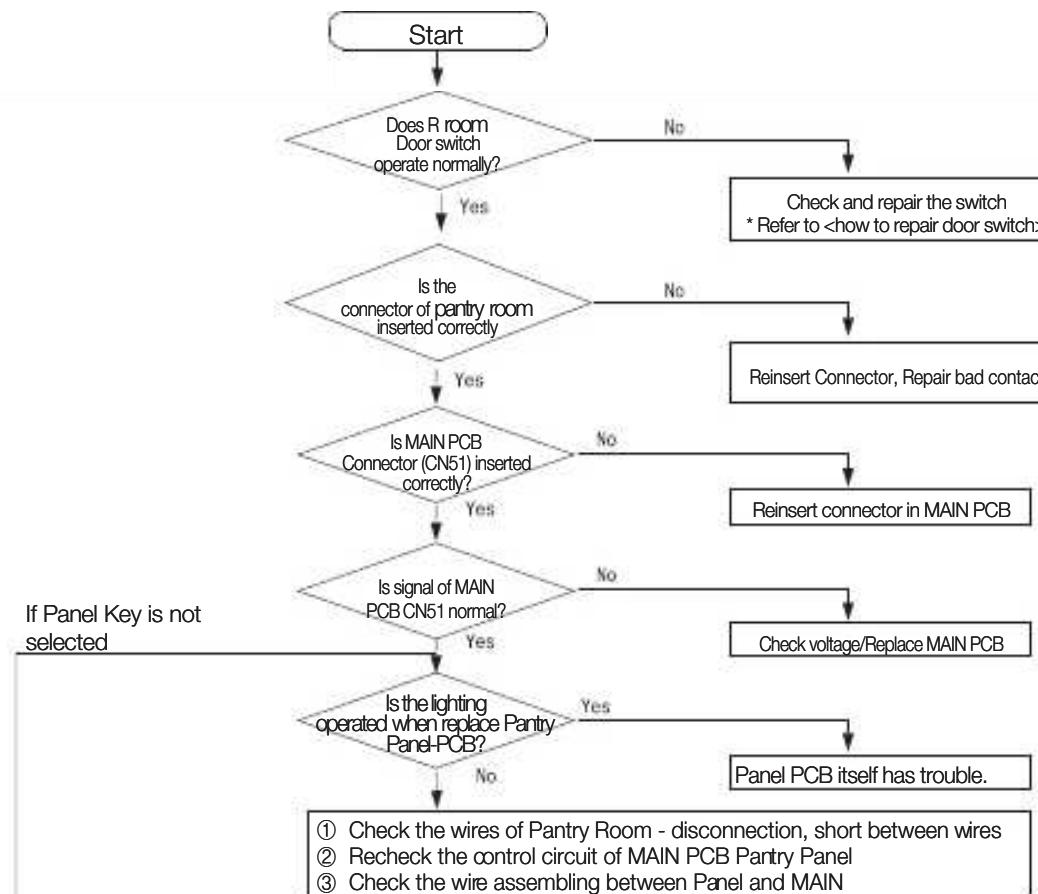

② If Panel PCB Key is not selected

\* If it is not repaired with the above basic checking method



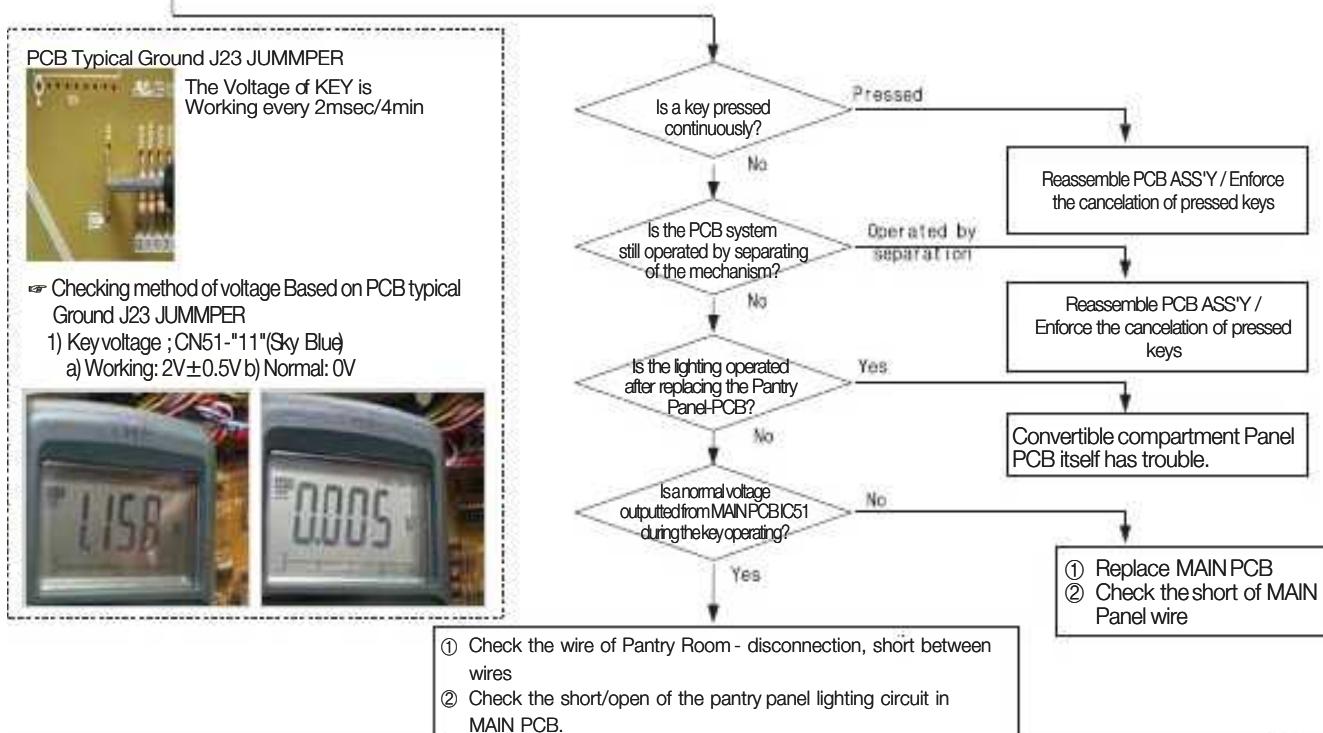


## TROUBLESHOOTING

### 4-2-10. When refrigerator ROOM Lamp does not light up

When controlling the refrigerator light with Regulator(12V) : LED LAMP  
→ Applying to the F/R Room compartment (Option)

\* If the Vegetable Lamp does not work properly, check the R compartment LED Lamp because it is connected with the R compartment LED Lamp in parallel. Refer to the circuit diagram to repair.

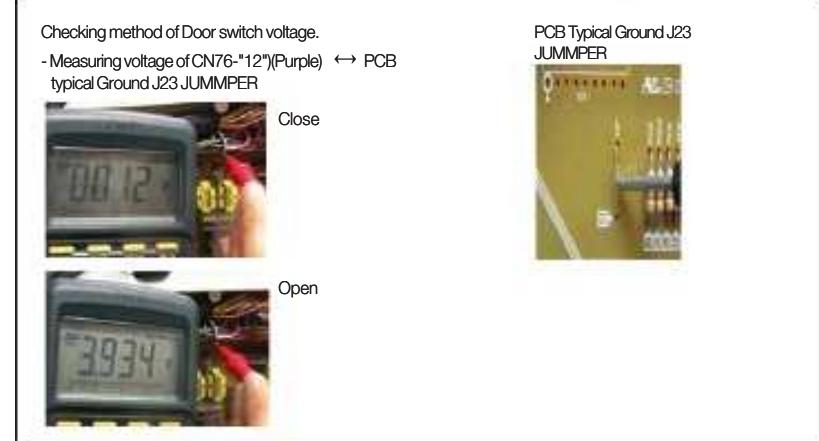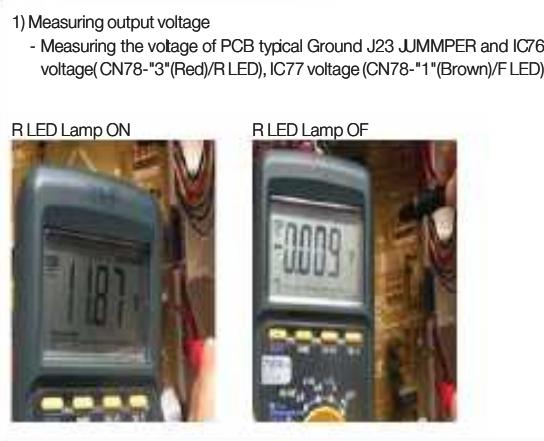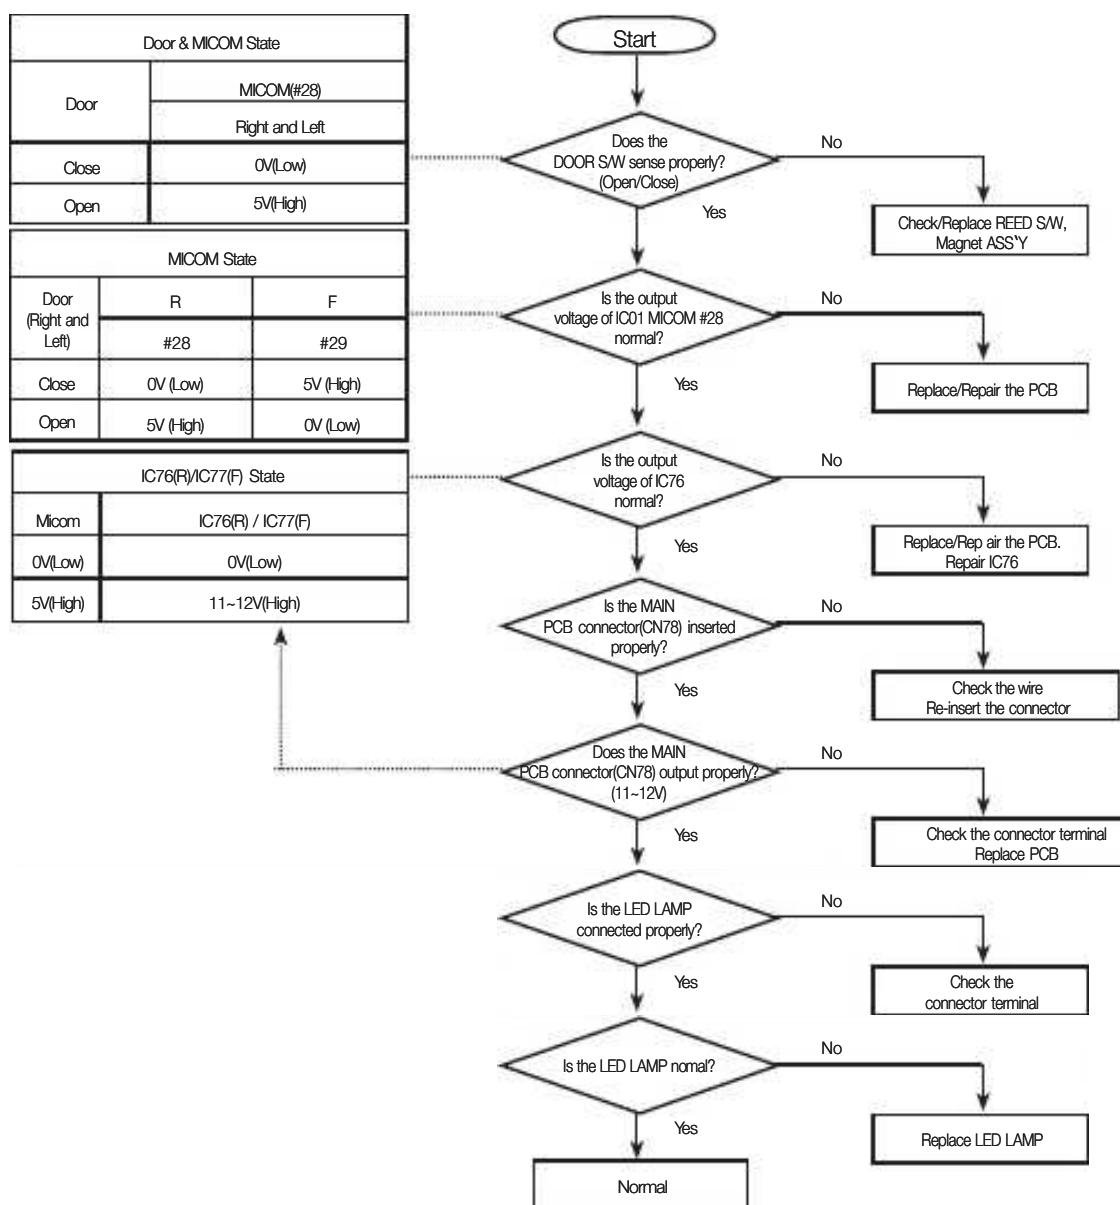

## TROUBLESHOOTING

### 4-2-11. If ICE Water is not supplied

1. Please shut the water supplying prior to repair.
2. Power is applied to the one end of wires. Be careful when disassembling not to get an electric shock.

#### 1) Ice Water(F) Valve

Typical PCB Ground J23 JUMPER



☞ Checking method of voltage Based on PCB typical Ground J23 JUMPER

- 1) Check the voltage of IC75 -"6"(same voltage as IC01 #116)  
- ICE Water valve operating (about  $5V \pm 0.5V$ )




Based on PCB typical Ground J23 JUMPER


- 2) IC75 -"11" voltage  
- ICE Water valve Waiting (about  $13V \pm 0.8V$ )  
- ICE Water valve operating (about  $0.7V \pm 0.5V$ )



3) Check the voltage of Fridge Ice Water(F) Valve operating(AC voltage)  
=> For checking the Relay RY76  
CN70- "5"(Red) ↔ CN72- "1"(Brown)  
- ICE Water valve waiting (about AC 0V)

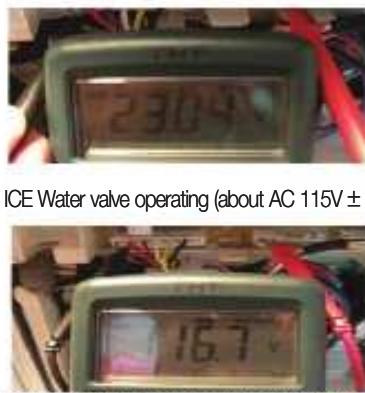

- ICE Water valve operating (about AC  $115V \pm 20\%$ )

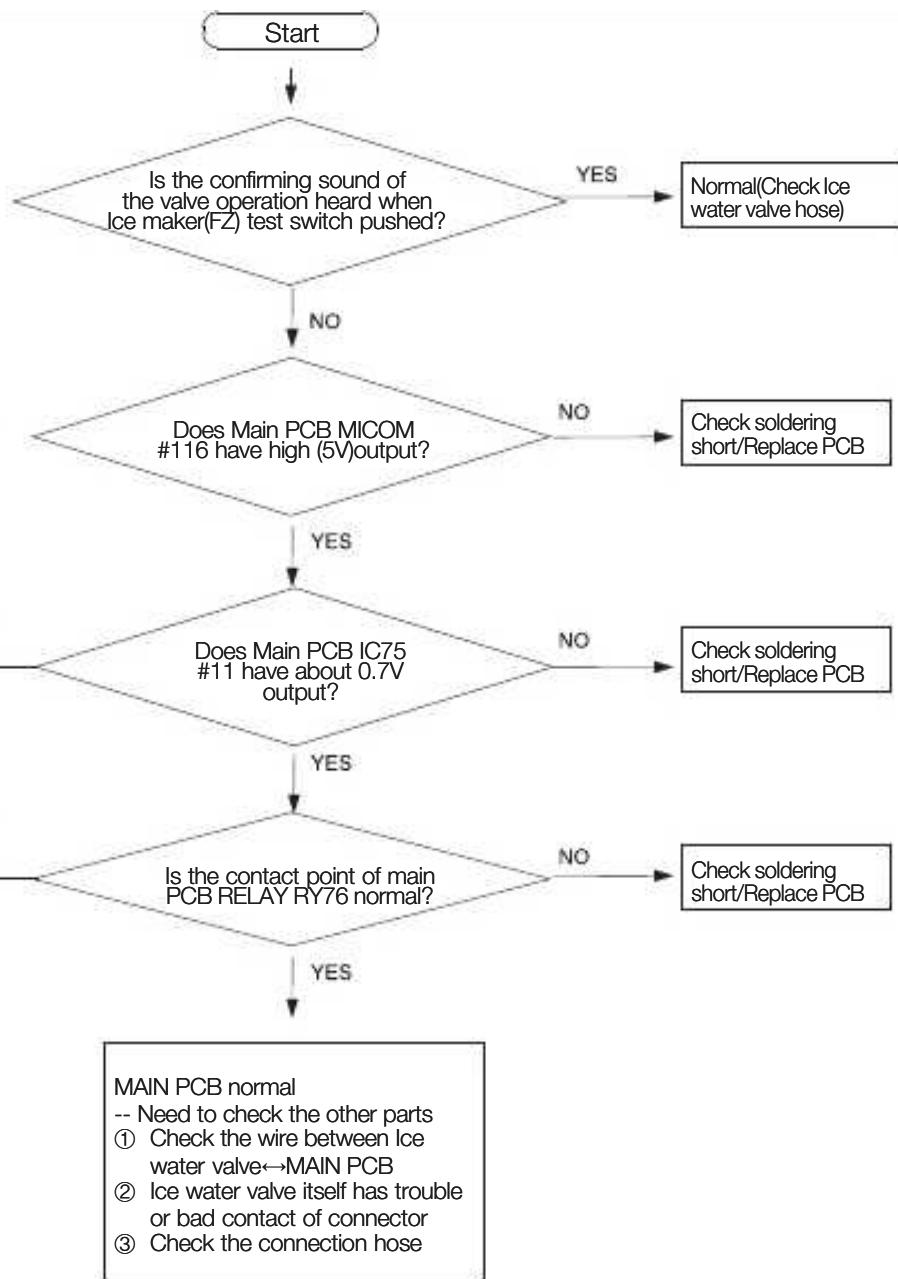

## TROUBLESHOOTING

### 4-2-12. LED blinking frequency depending on protecting functions

If Failure Condition is detected during compressor is operating, immediately stop Compressor operating and stand by 5 minutes. During this 5 minutes, RPM command signal is not available. It means, even if available RPM command signal is applied to the compressor, it does not work and keep standing by.


Blinking time is 1 second and dwell time is 2 seconds.

LED Blinking Frequency	Protecting Functions	Remarks
	Normal Operation	N/A
	Starting Failure	<ul style="list-style-type: none"> <li>1. Short between COMP U,V, and W phase(CN04)</li> <li>2. Short among IPM Pins(No. #1 ~ 26)</li> <li>3. Drop the IPM operating Voltage under DC 13.5V</li> <li>4. Other cases, check the COMP, cycle, etc.</li> </ul>
	SPM Fault	<ul style="list-style-type: none"> <li>1. Short between COMP U,V, and W phase(CN04)</li> <li>2. Short among IPM Pins(No. #1 ~ 26)</li> <li>3. Drop the IPM operating Voltage under DC 13.5V</li> <li>4. Other cases, check the COMP, cycle, etc.</li> </ul>
	Abnormal Current Detection	<ul style="list-style-type: none"> <li>1. Open the COMP wire(CN04)</li> <li>2. Bad condition of R1(ex. Bad soldering.)</li> <li>3. Other cases, check the COMP, cycle, etc.</li> </ul>
	Motor Locked / Over RPM	<ul style="list-style-type: none"> <li>1. Operating the locked rotor COMP within 5 second.</li> <li>2. Operating the COMP under 1000 RPM more than 5 second.</li> <li>3. Occur the huge change of input voltage in a moment.</li> <li>4. Other cases, check the COMP, cycle, etc.</li> </ul>
	Under Voltage	<ul style="list-style-type: none"> <li>1. Drop the input voltage under AC 53V</li> <li>2. Short resistor R312 (DC link resistor)</li> </ul>
	Over Voltage	<ul style="list-style-type: none"> <li>1. Increase the input voltage over AC 155V</li> <li>2. Short resistor among R309, R310 and R311 (DC link resistor)</li> </ul>

LED blinking frequency depending on protecting functions  
If the same blinking, After 5 minutes, Follow the Remarks

## TROUBLESHOOTING

### SPM FREEWHEELING DIODE VOLTAGE VALUE

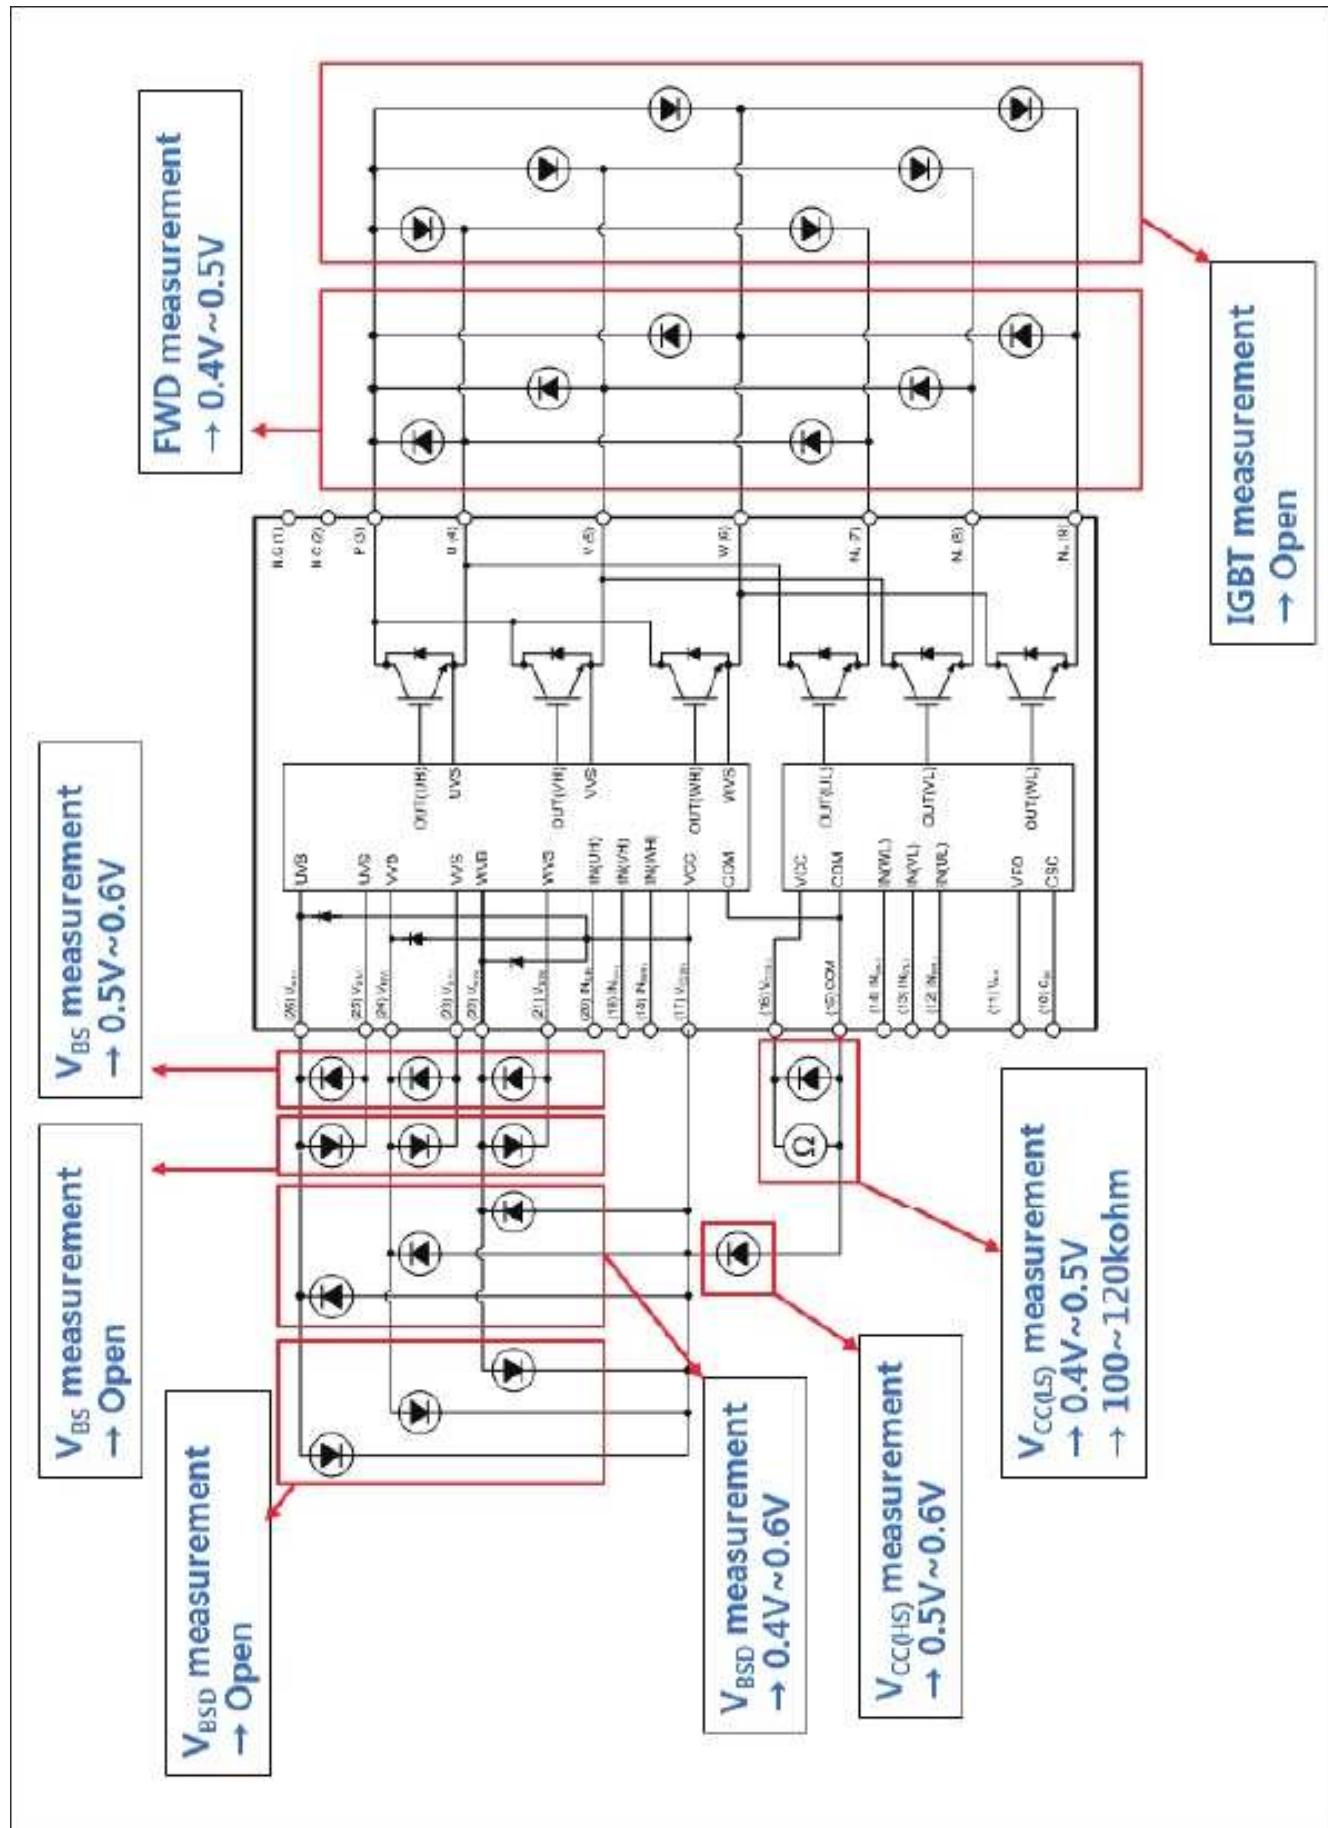


## 5. PCB DIAGRAM

5-1) PCB Layout with part position .....	95
5-2) PCB Layout with part position (Inverter Board) .....	96
5-3) Connector Layout with part position (Main Board) .....	97
5-4) Connector Layout with part position (Inverter Board) .....	98

## PCB DIAGRAM


### 5-1) PCB Layout with part position

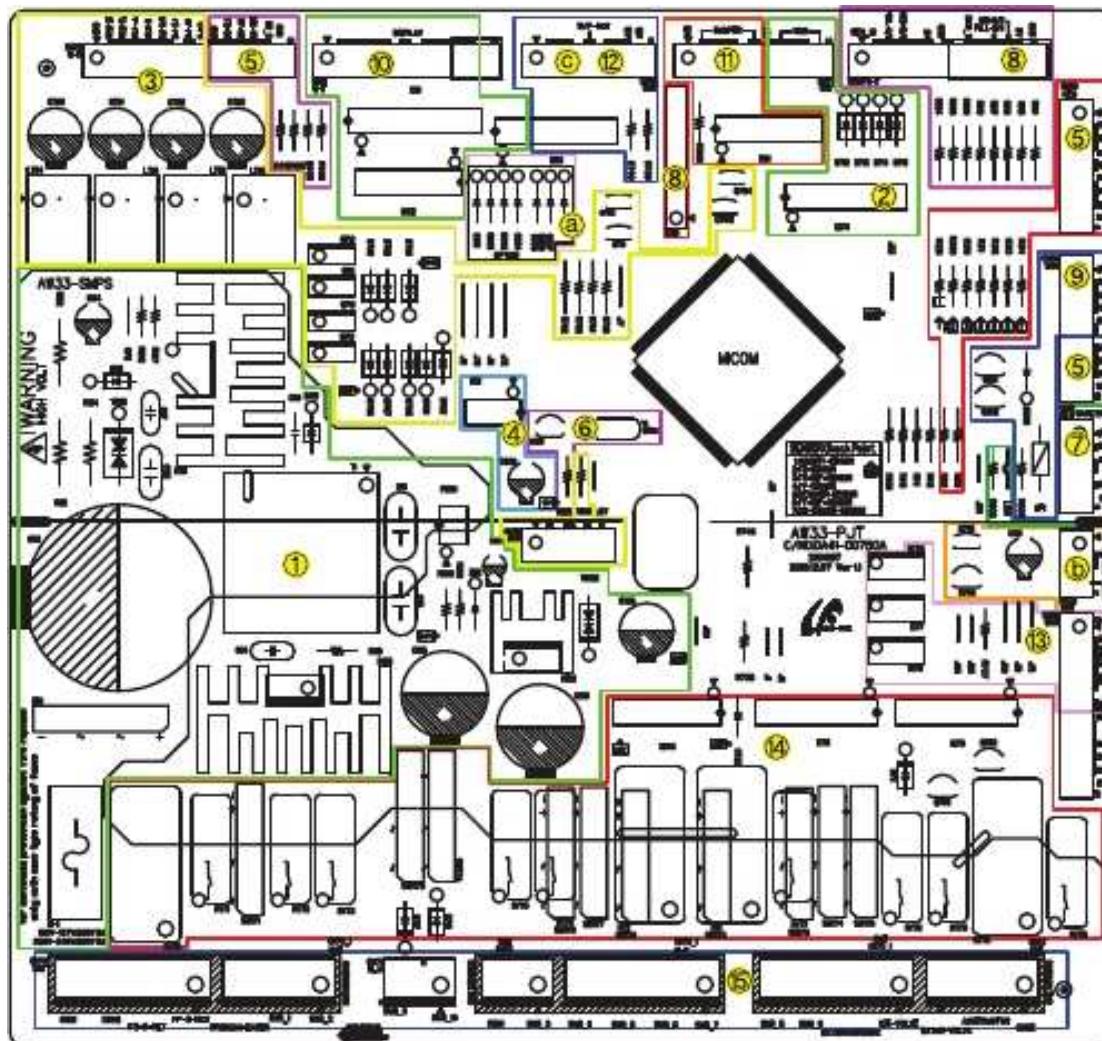

1. DC12V, 5V, GND supplied from SMPS PCB (Not Used)
2. Circuit for controlling Step-Valve (3-Way Valve) \* Option
3. FAN MOTOR control part : To supply the power from 8.3V ~ 12V according to the motor types. (F,R,C,ICE)
4. EEPROM : Save and record every kinds of data.
5. Transmit inputted signals from every sensor into MICOM after eliminate the noise.
6. Micom : control the refrigerator Ceramic resonator : generate the basic frequency of Micom operation. Reset IC : make Micom reset if input voltage of Micom is detected less than the specified voltage
7. PLC input/output
  - PLC (Power Line communication) \* Option (PLC module is not inserted unless specified occasion)
8. Operate ICE-MAKER, supply power to MOTOR, and sense the variation of switch.
9. Main Micom ↔ Panel Micom serial communication circuit – Dispenser option input part (Water & Cover Ice route switch)
10. PANTRY Room display control part : display LED, detect KEY state.
11. Control PANTRY Room damper & Damper heater
12. Water Tank Heater Controls (also controls other options)
13. LED LAMP Control Circuit (F,R room Lamp)
14. Relay parts that controls AC load and receives Micom operating signal through Sink IC.
15. Connector with AC load
  - a. Diode option setting area
  - b. Inverter COMP controlling signal
  - c. Flow Sensor controlling signal

## PCB DIAGRAM

5-2) PCB Layout with part position (Inverter Board)

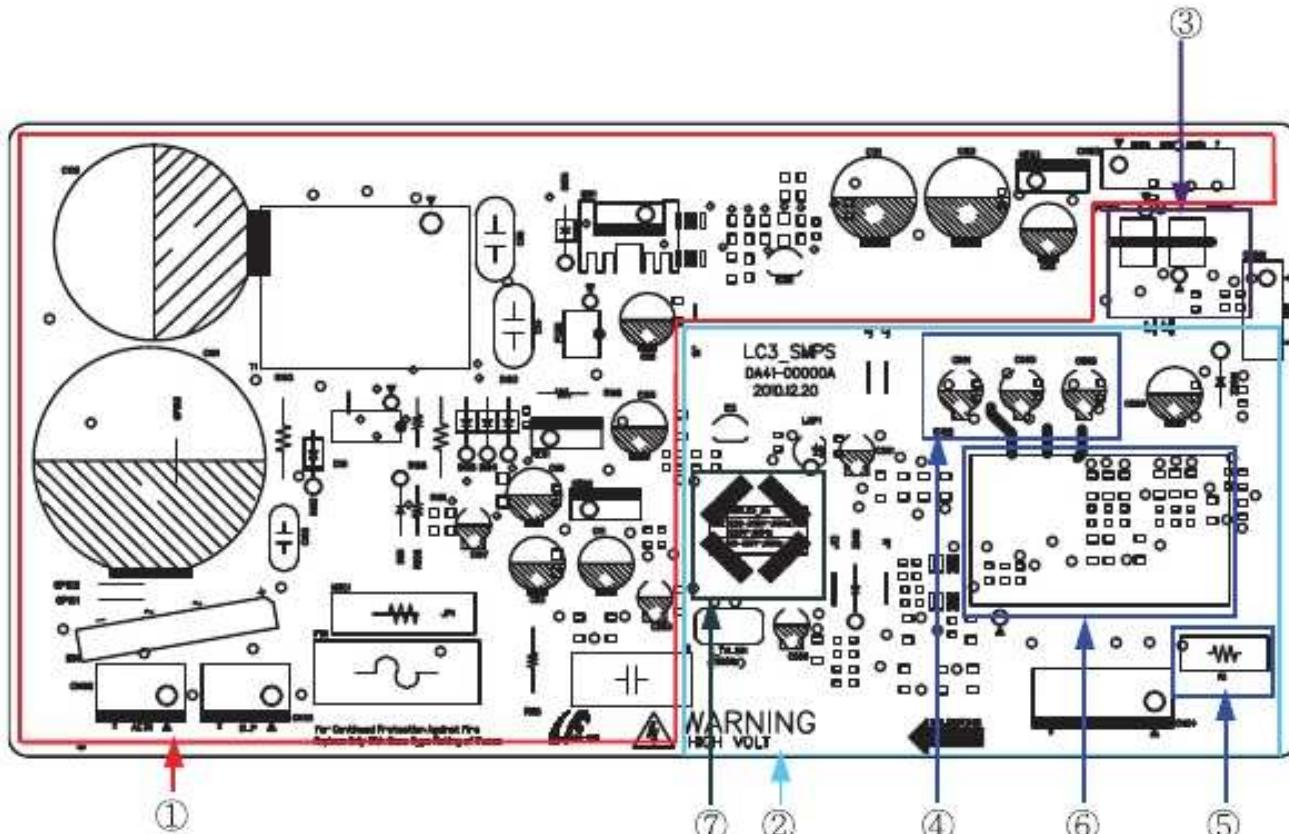


1. PCB Power Supply : From the SMPS circuit, it supplies 13.2V and 5V for the Main PBA control and supplies 15V and 5V to the Inverter circuit for the Compressor control.
2. Inverter Control Circuit : Fridge Compressor Control Circuit.
3. COMP Driving / Feedback Circuit  
It receives the COMP operation signals from the Main PBA and feedbacks the inverter errors to the Main PBA.
4. BOOTSTRAP Charger : It is an independent power circuit for the driving of the IMP High-Phase IGBT.
5. Current Pickup Circuit : It pickups the currents taken by the Shunt resistance and does the PWM DUTY control.
6. IPM (FNE41060)
7. Micom (MN103SFC2D)

## PCB DIAGRAM

### 5-3) Connector Layout with part position (Main Board)

#### 5-3-1. RF261\*

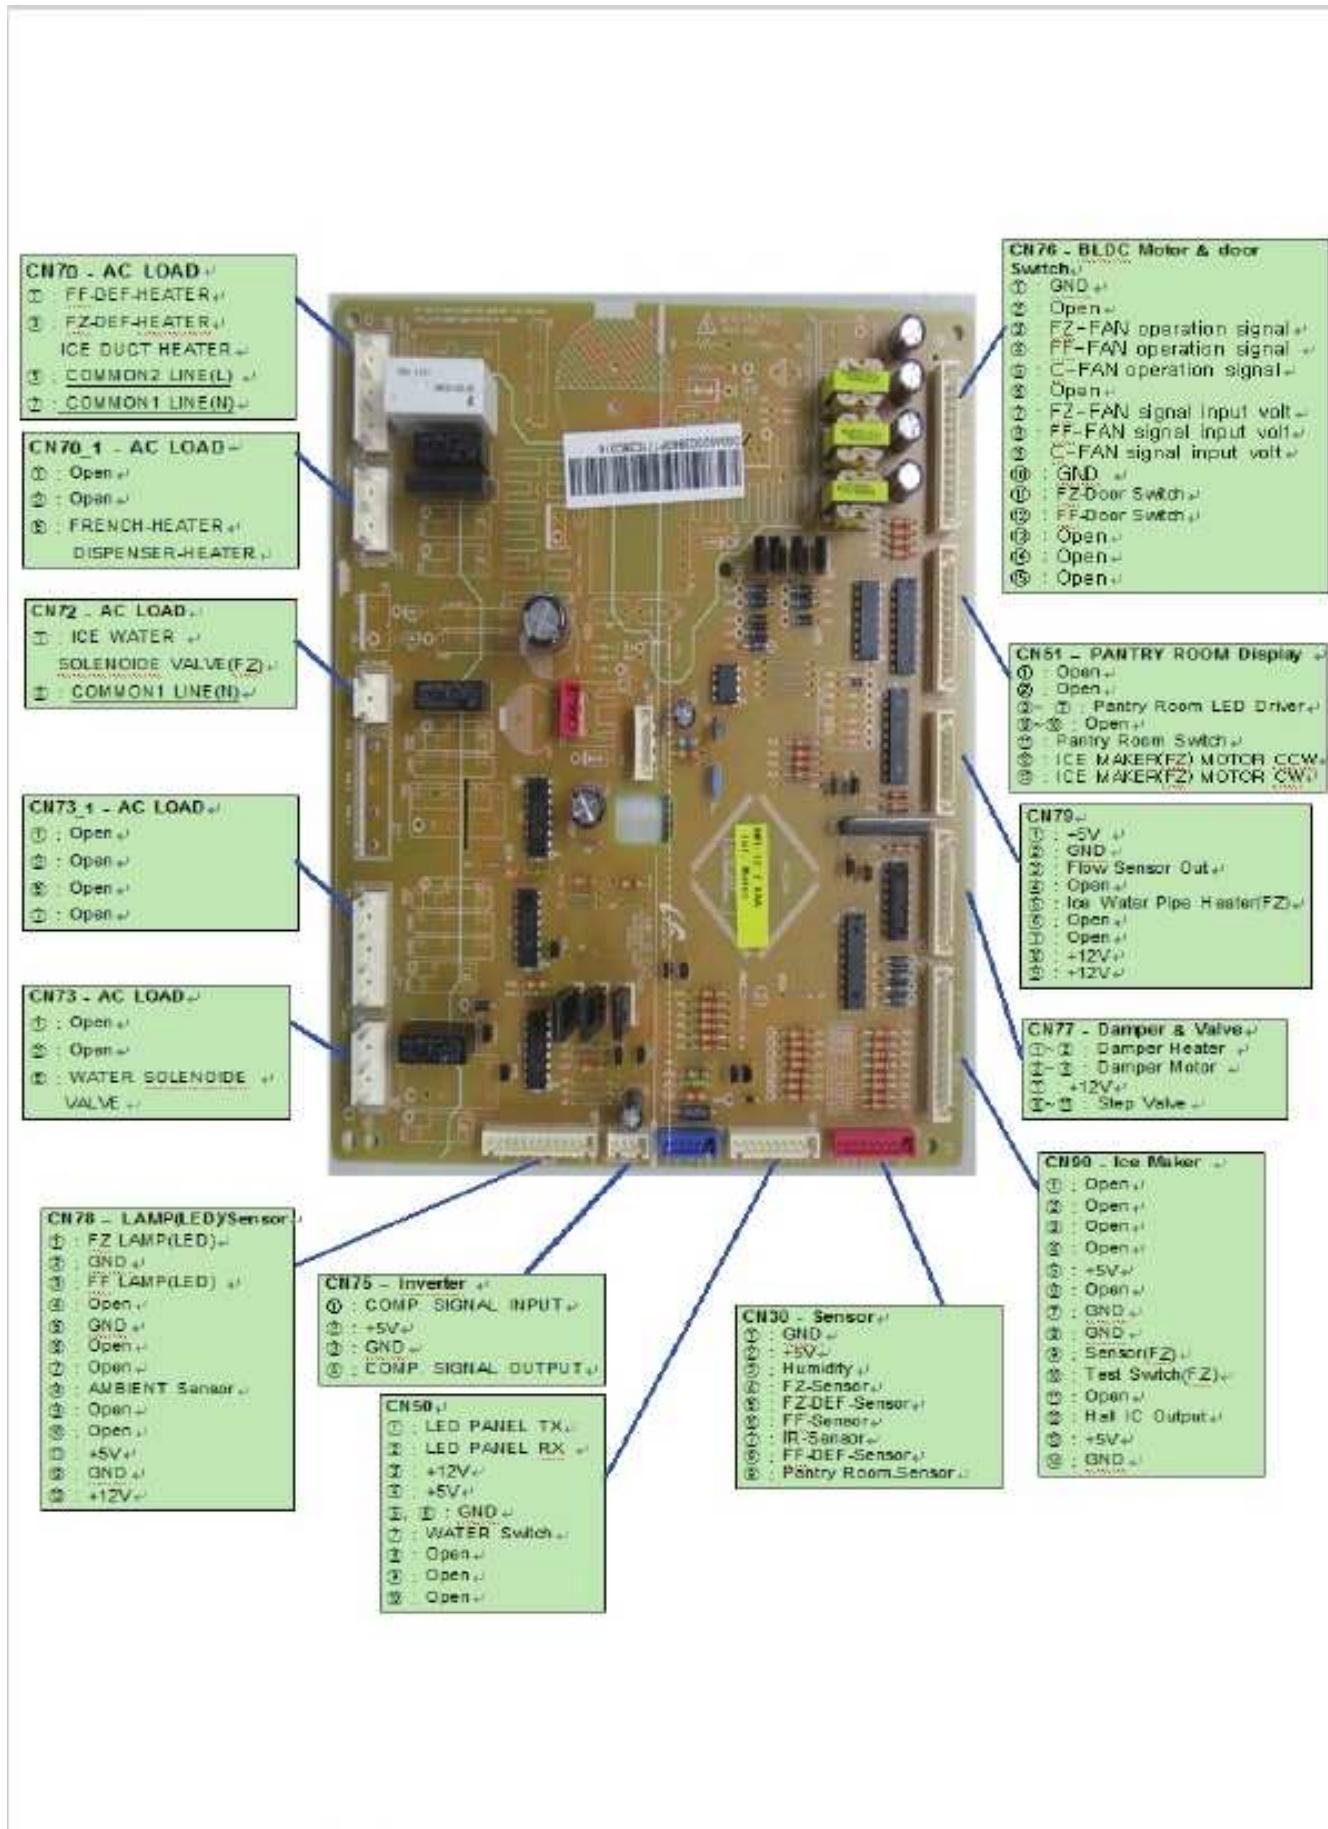

This document can not be used without Samsung's authorization

## PCB DIAGRAM

### 5-4) Connector Layout with part position (Inverter Board)

AC 115V

①② 13.2V ③ 5V  
④⑤ GND ⑥ RPM ⑦FB



AC 230V


①② 13.2V ③ 5V  
④⑤ GND ⑥ RPM ⑦FB



This document can not be used without Samsung's authorization

## 6. WIRING DIAGRAM


6-1) Model : RF260B\* , RF261B\*

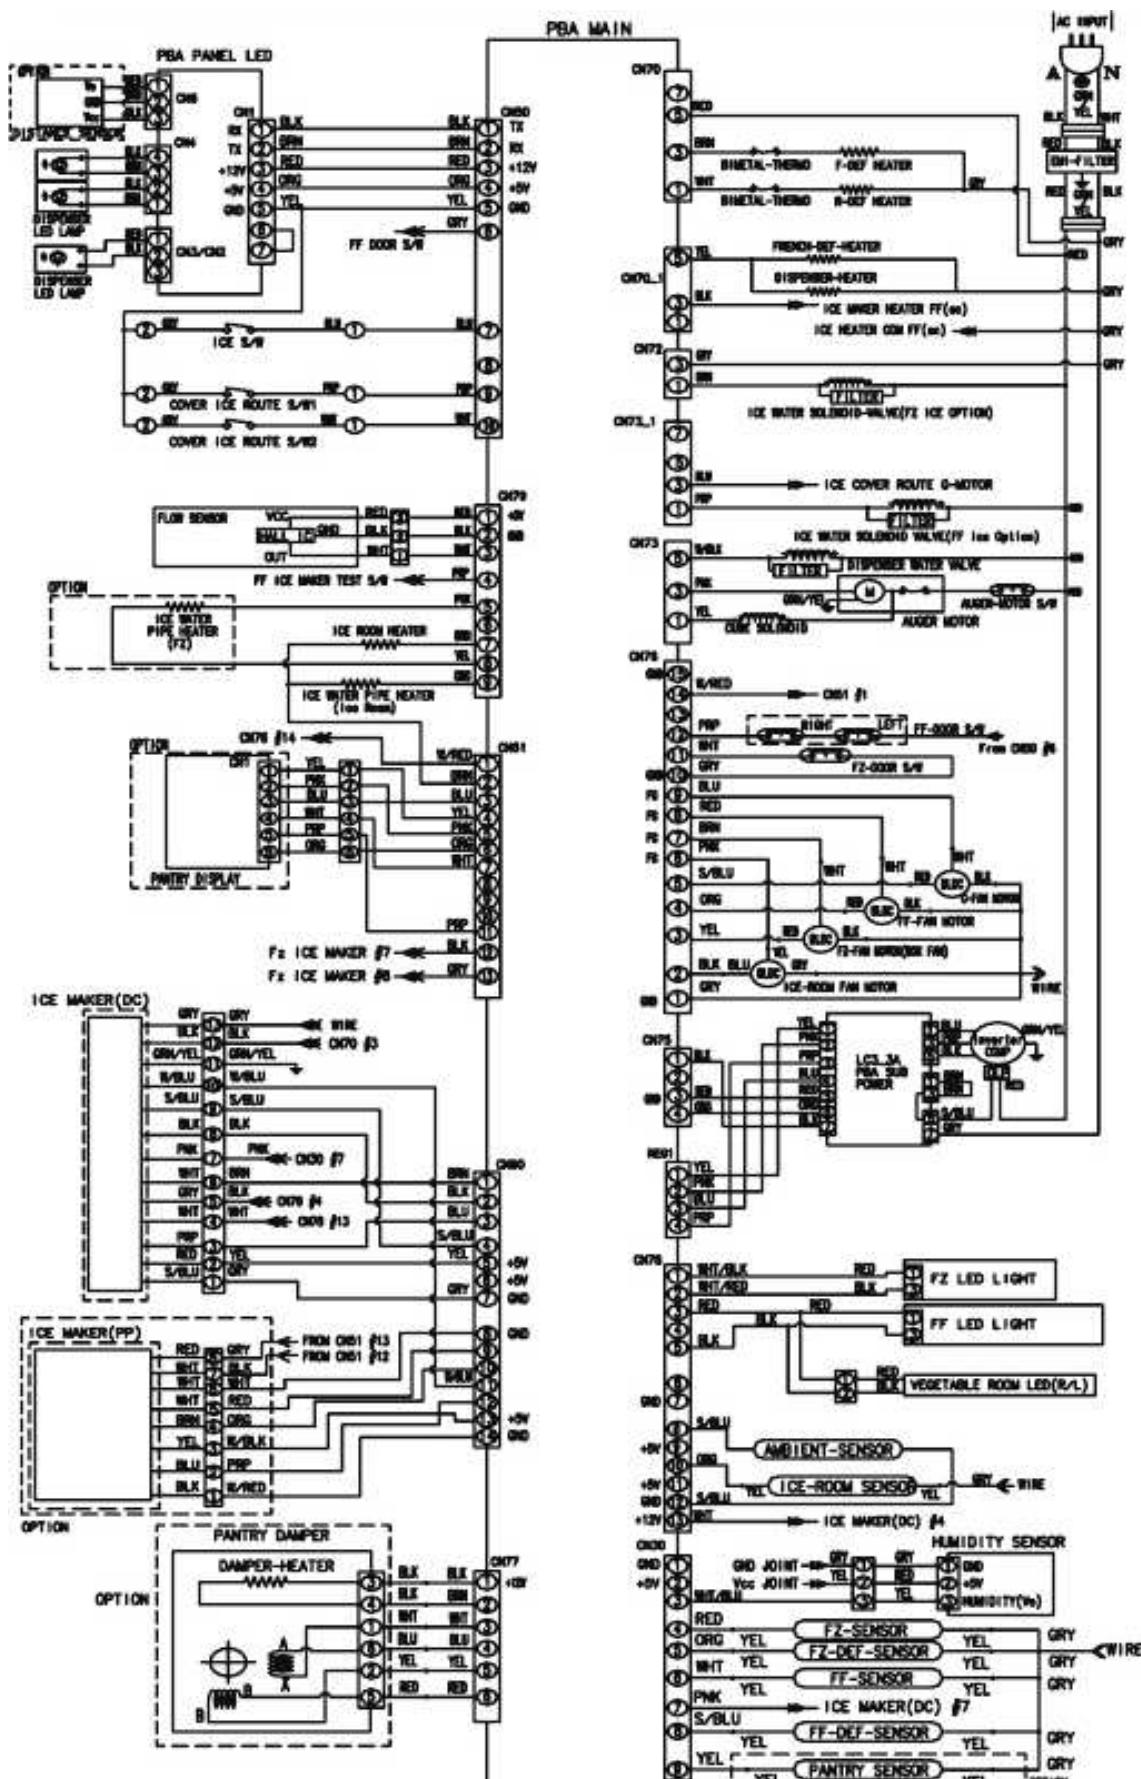

## 7. SCHEMATIC DIAGRAM


### 7-1) Whole block diagram

7-1-1. MODEL : RF261\*

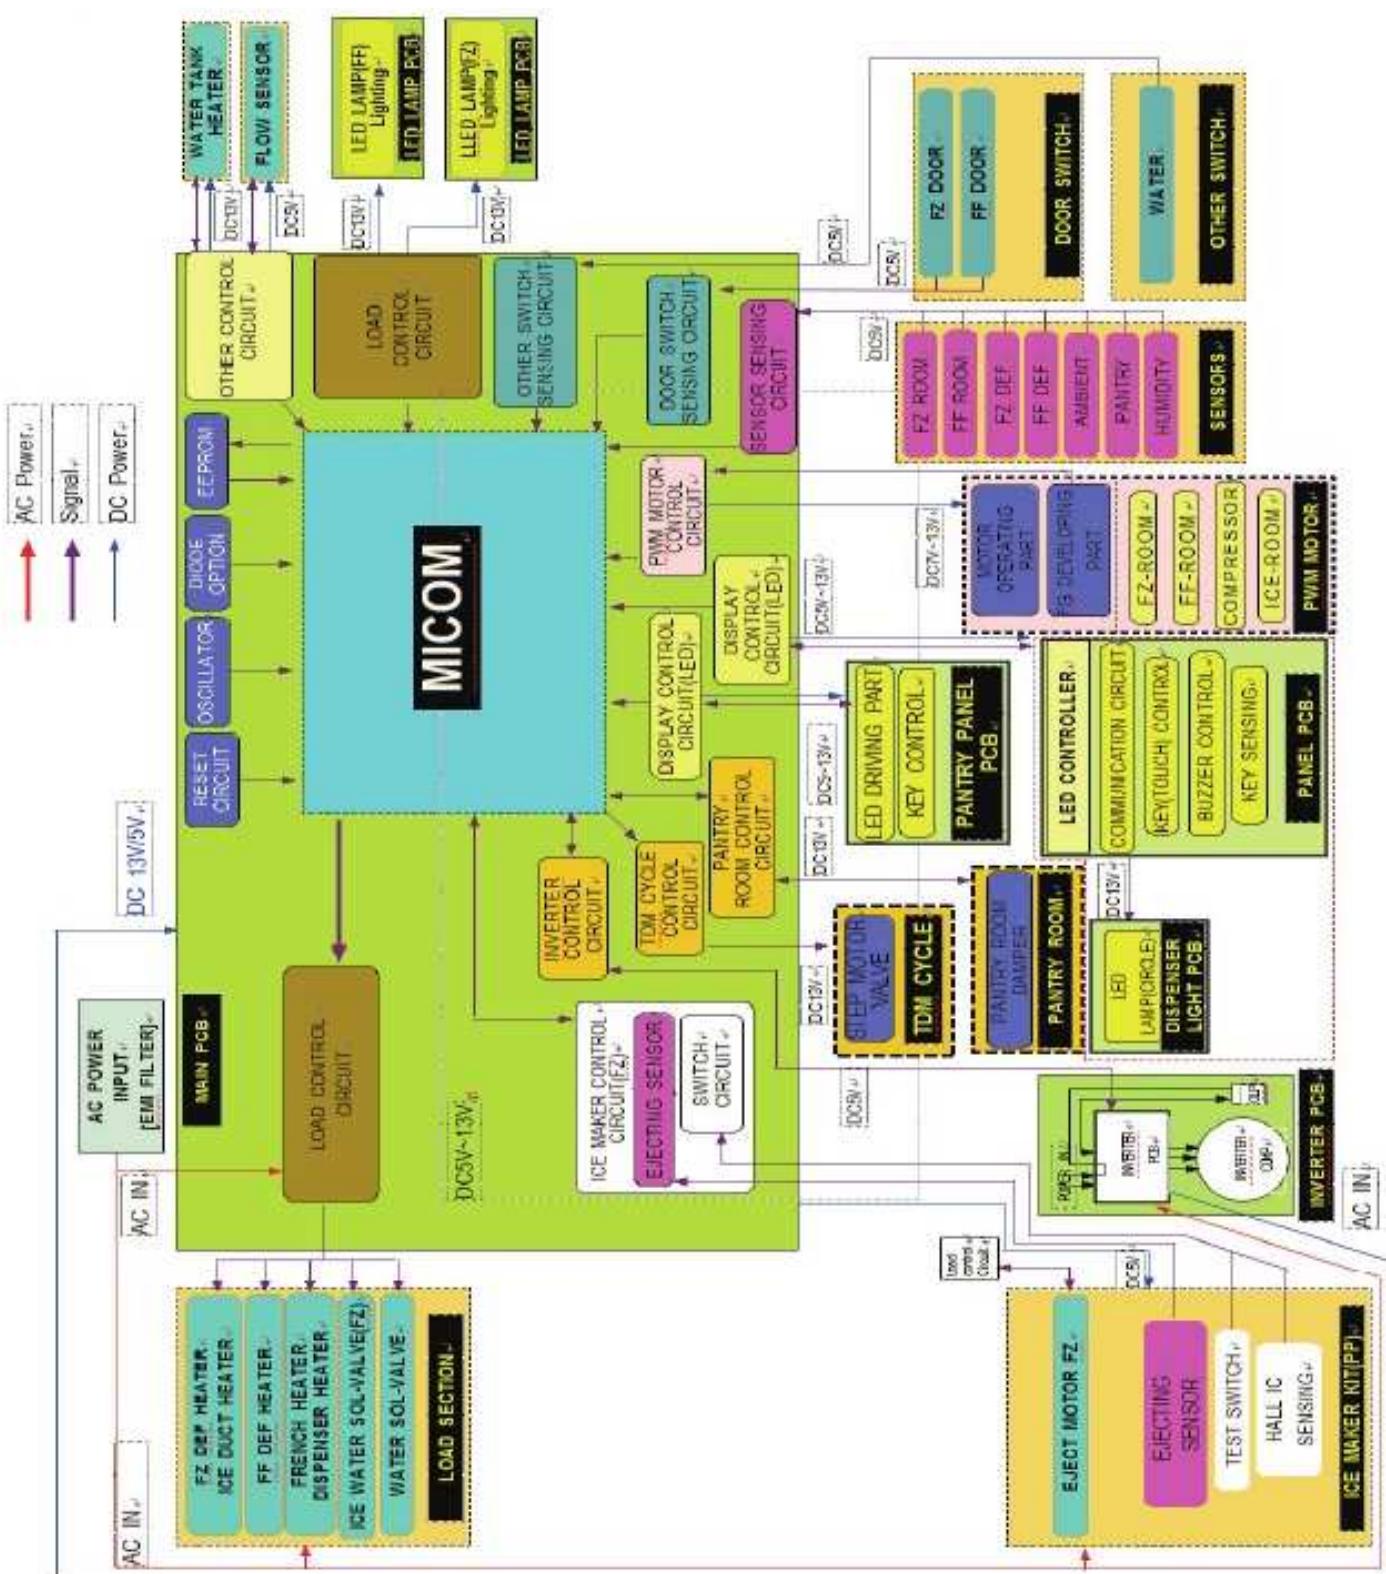

## SCHEMATIC DIAGRAM


### 7-1-2. MODEL : RF260\*

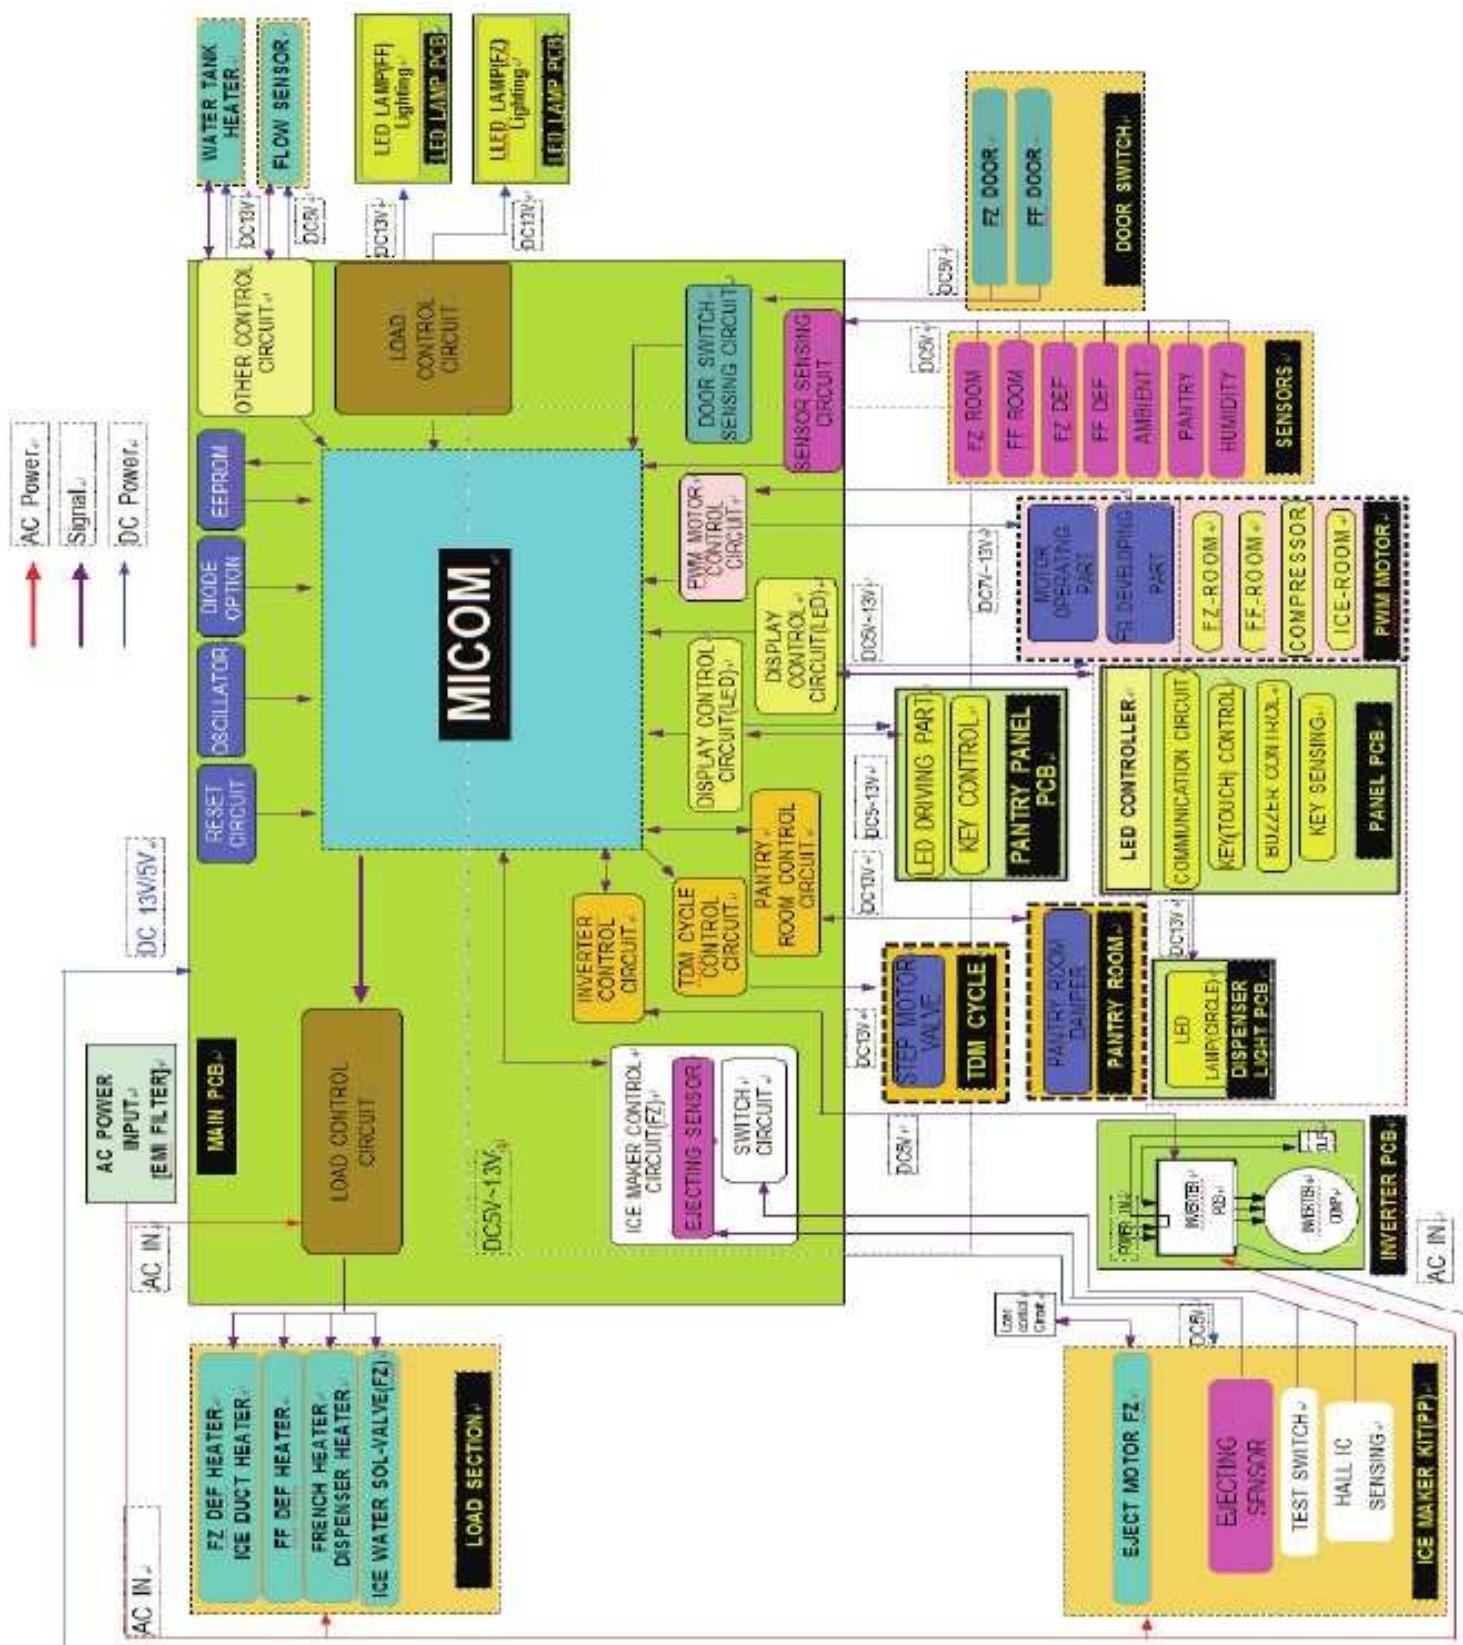

## SCHEMATIC DIAGRAM

### 7-2) Whole block diagram

7-2-1. MODEL : RF260B\*, RF261B\*

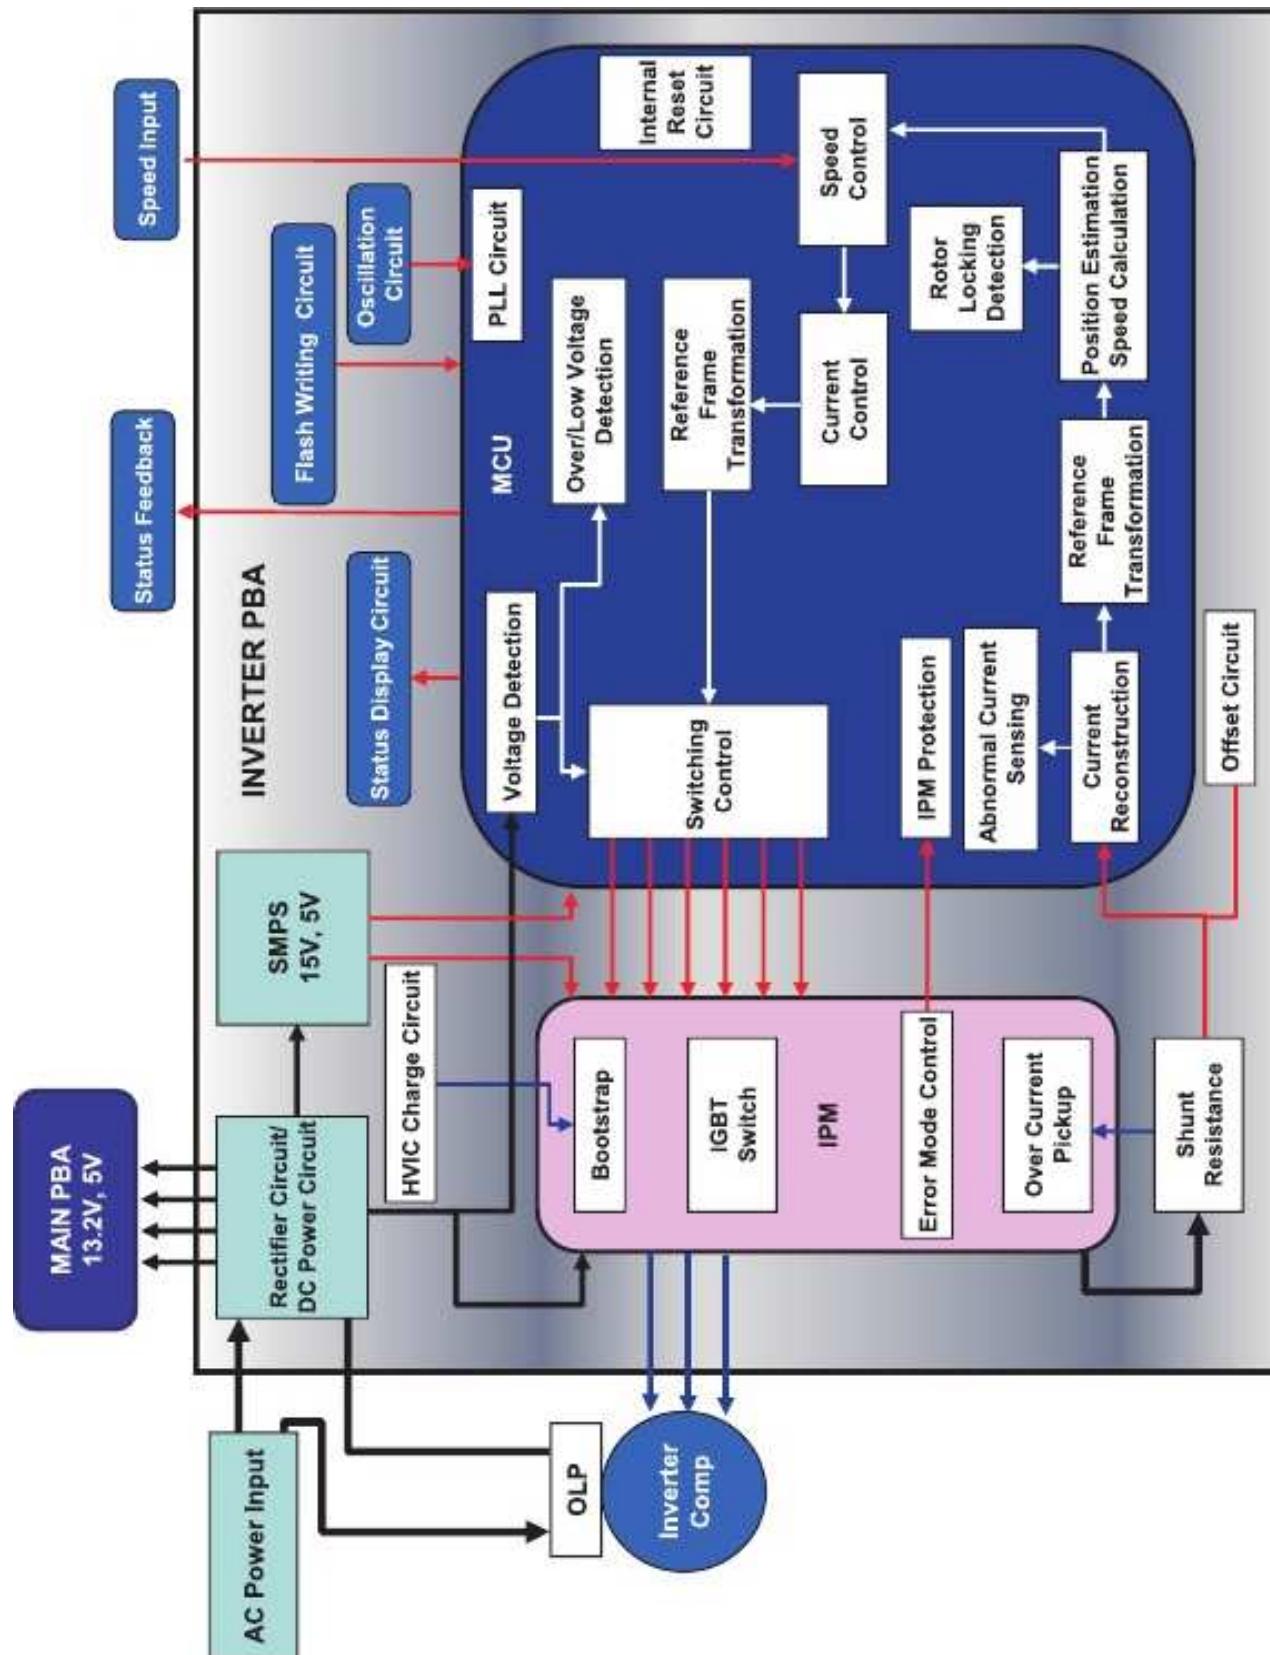


This document can not be used without Samsung's authorization

## SCHEMATIC DIAGRAM

### 7-3) CIRCUIT DIAGRAM


#### 7-3-1. Main

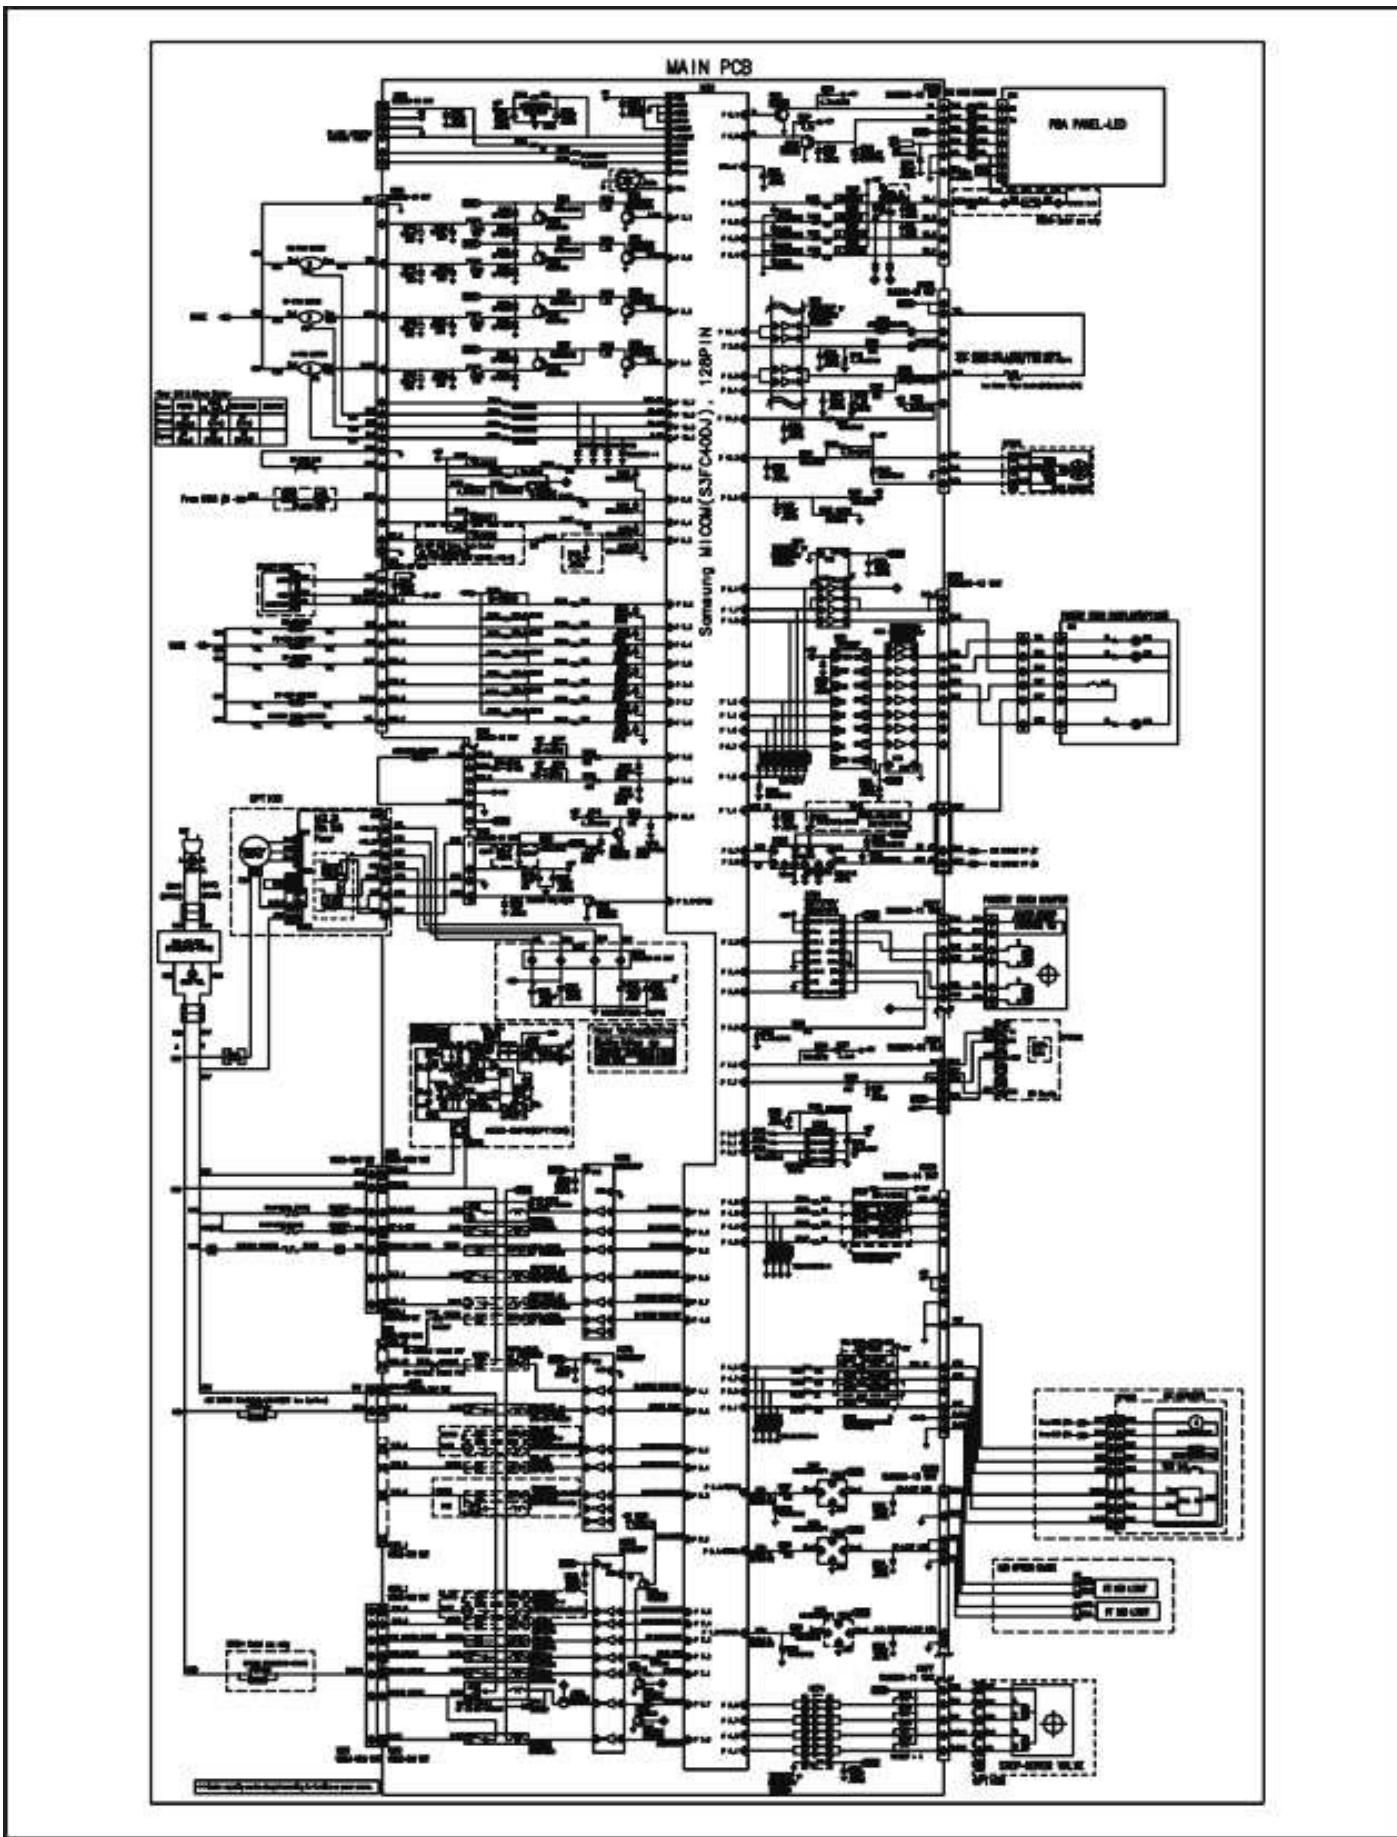

This document can not be used without Samsung's authorization

## SCHEMATIC DIAGRAM


7-3-2. INVERTER (AC 115V)

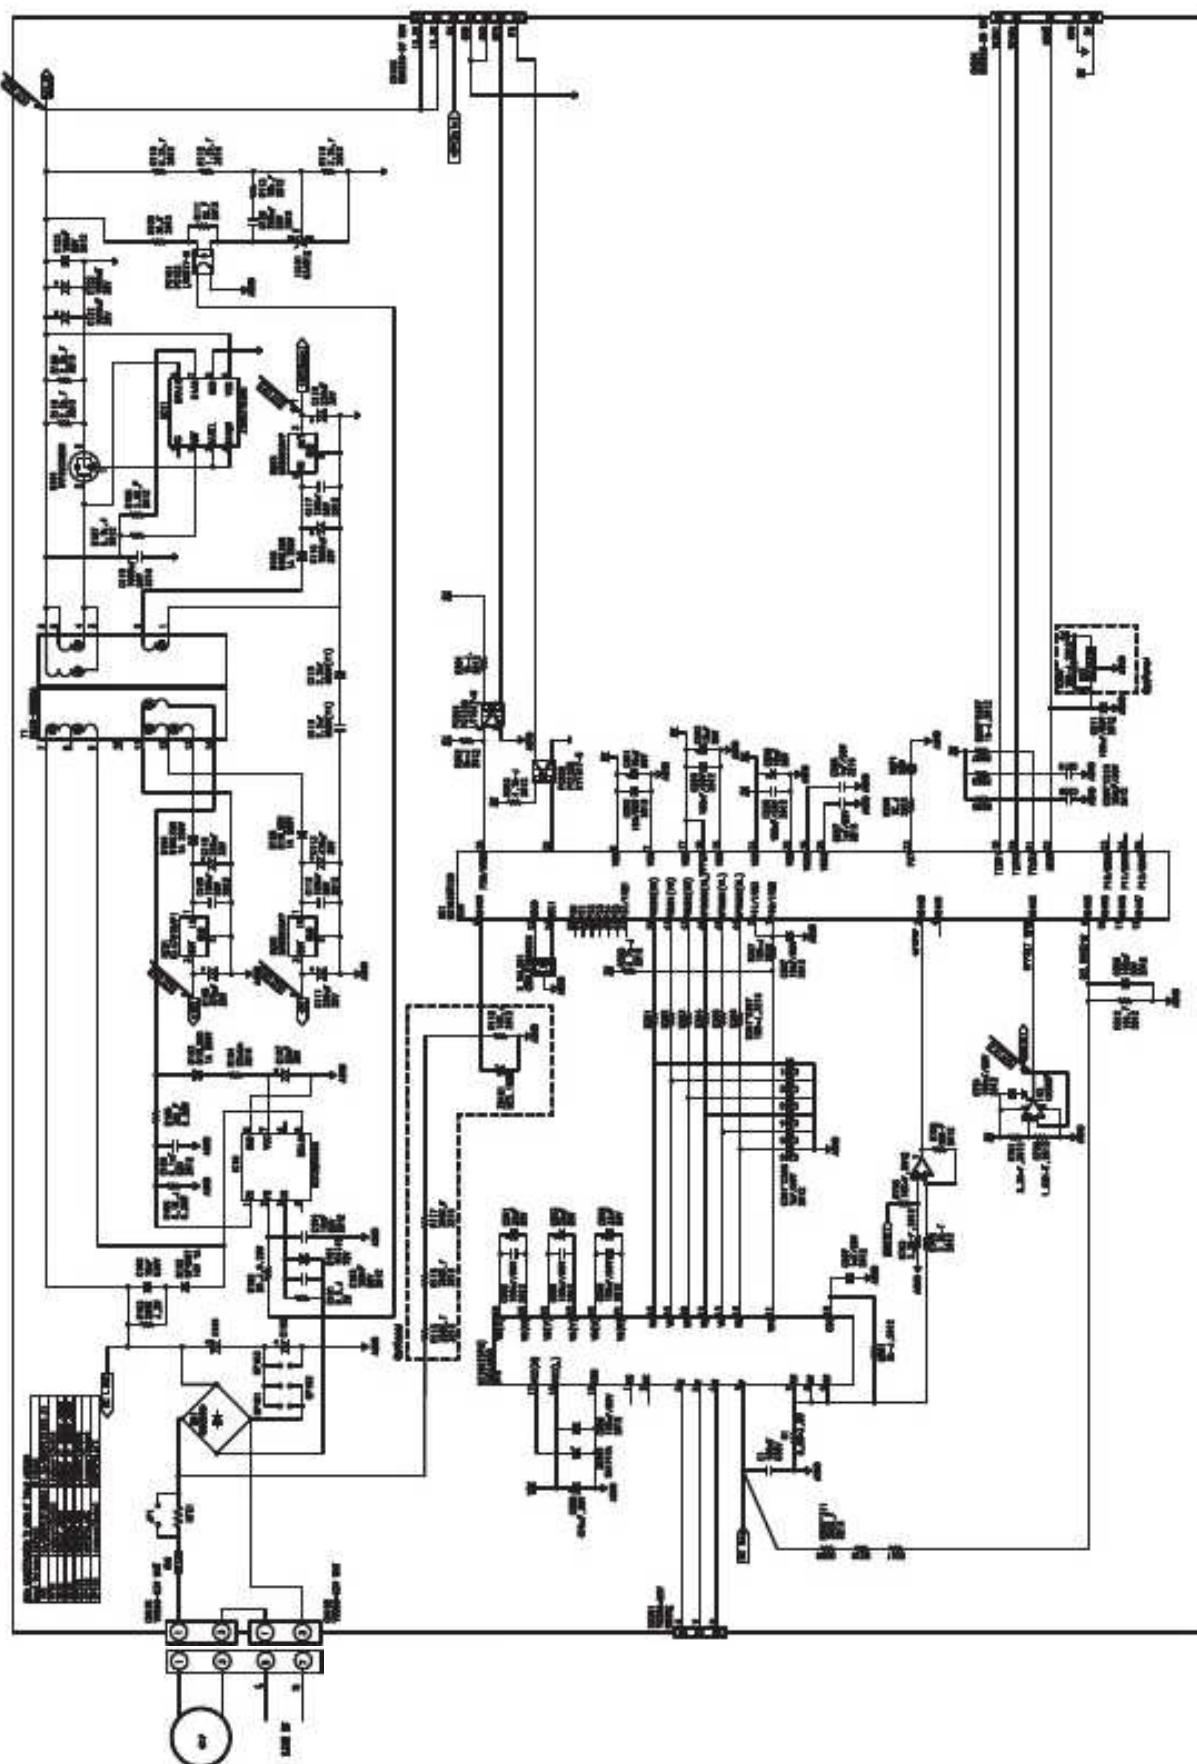

This document can not be used without Samsung's authorization


## SCHEMATIC DIAGRAM

7-3-3. INVERTER (AC 230V)

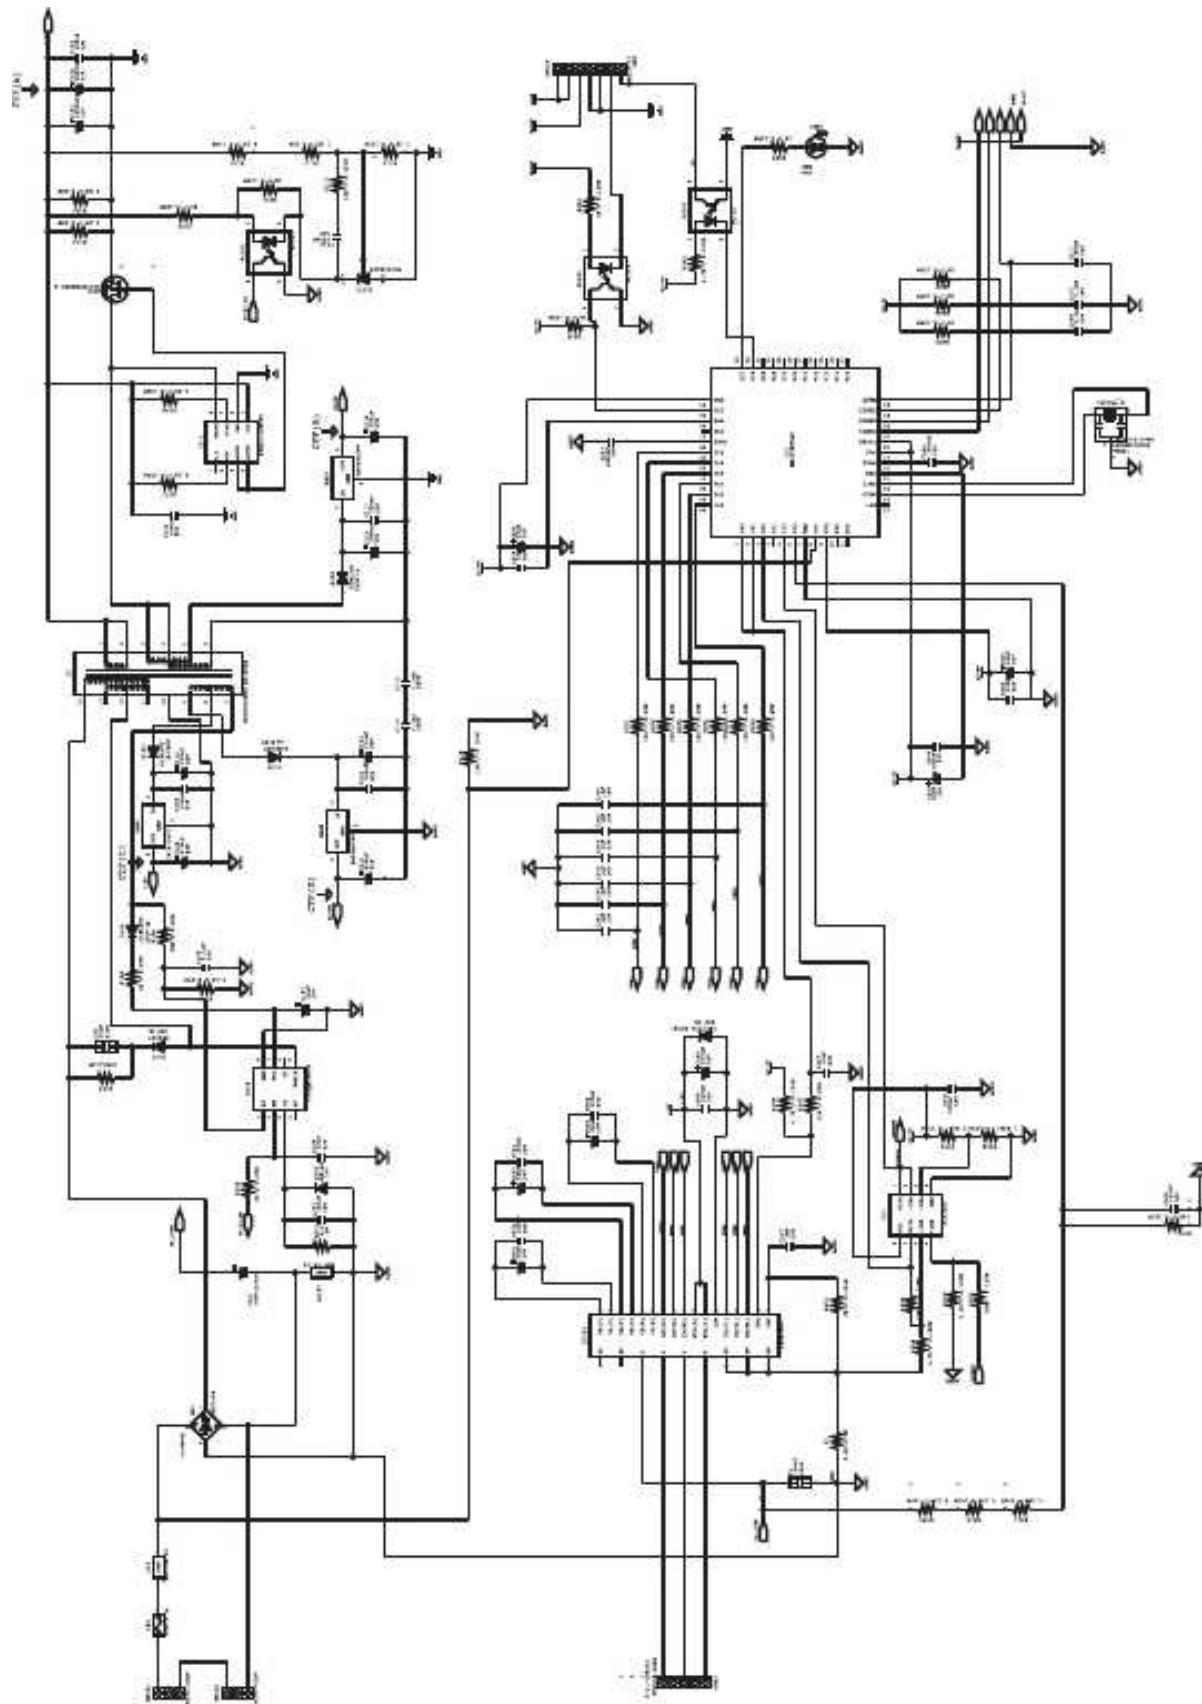


## SCHEMATIC DIAGRAM

7-4) Model name (nomenclature) – RF261\*

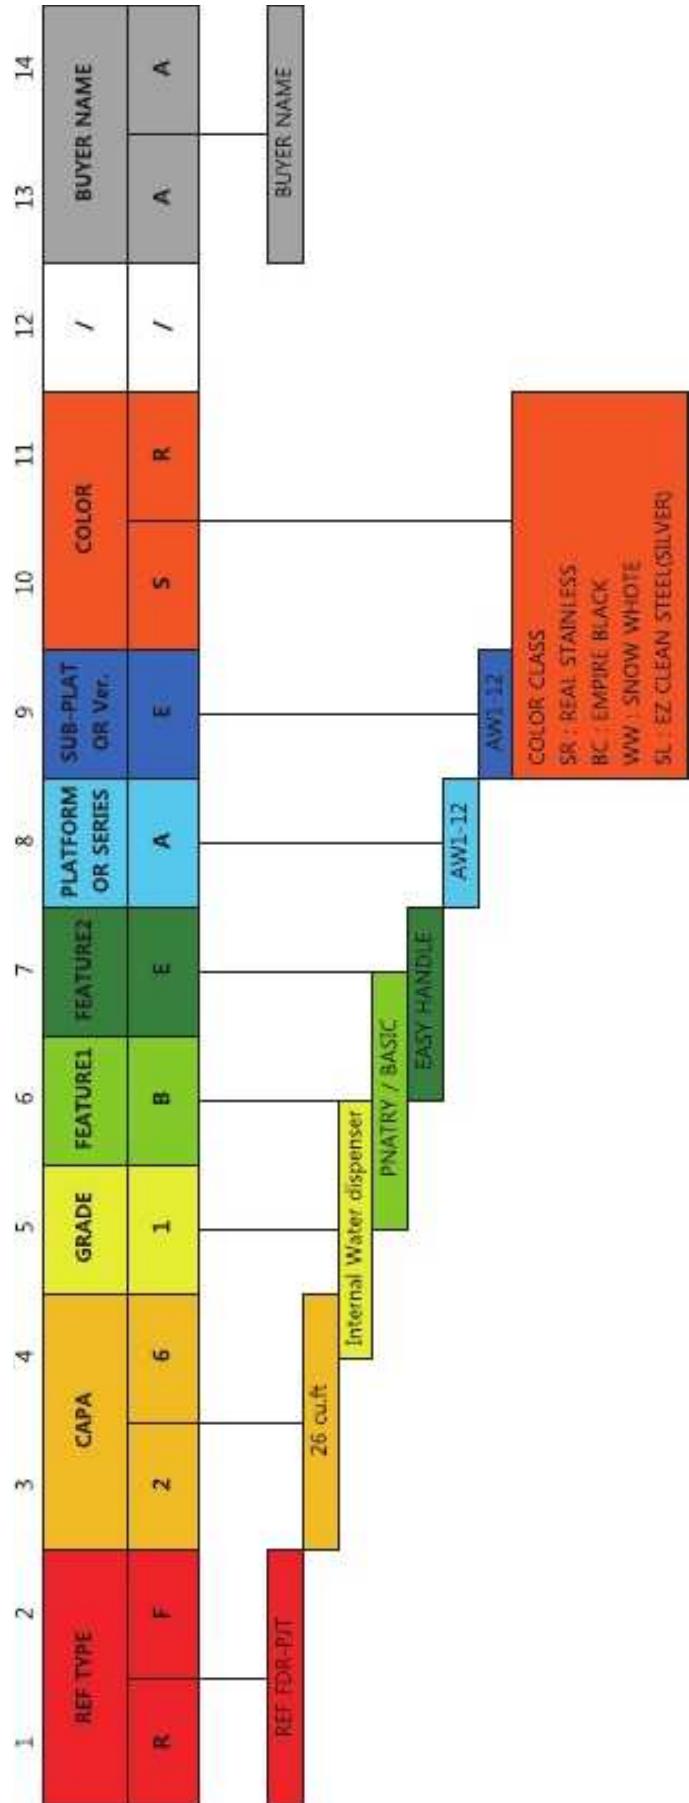

## SCHEMATIC DIAGRAM

7-4) Model name (nomenclature) – RF260\*

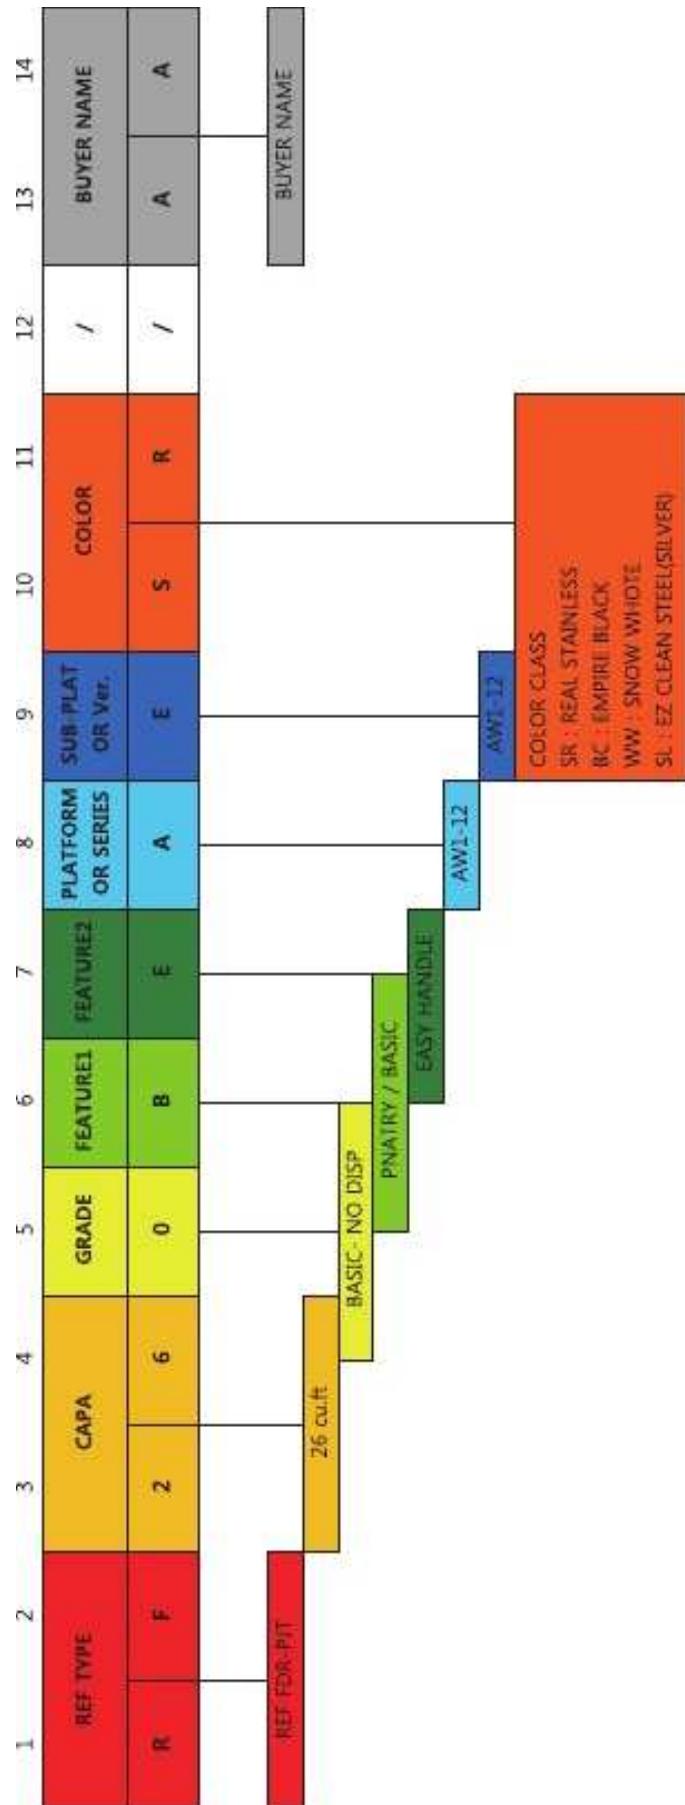



272, Oseon-Dong, Gwangsan-Gu,  
Gwangju-City, Korea, 506-253  
TEL : 82-62-950-6193, 6896  
FAX : 82-62-950-6829

For the latest information, Please access to our service web site

- Europe, Mid east, Africa : <http://gspn1.samsungcportal.com>
- Asia : <http://gspn2.samsungcportal.com>
- North America : <http://gspn3.samsungcportal.com>

– This Service Manual is a property of Samsung Electronics Co., Ltd.  
Any unauthorized use of Manual can be punished under applicable  
International or domestic law.